

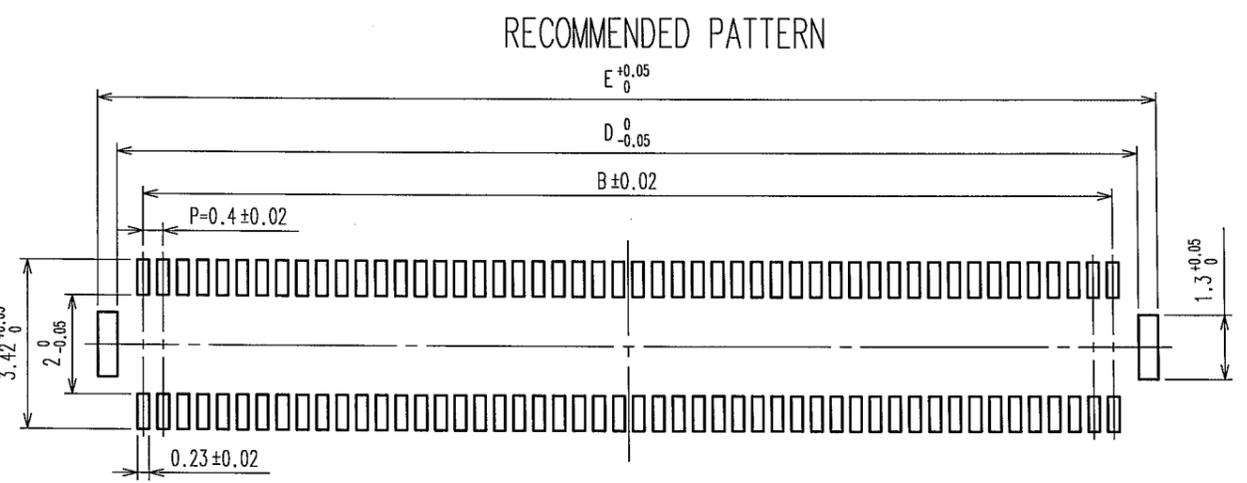
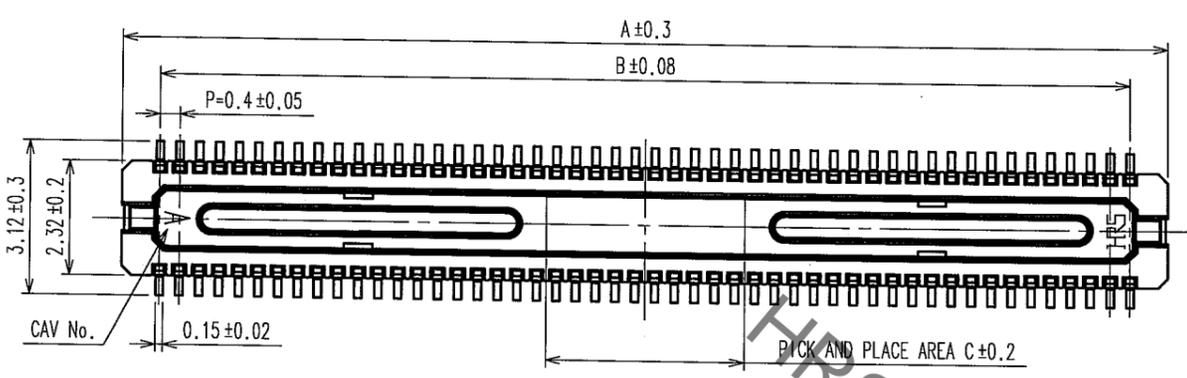


Apr.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE

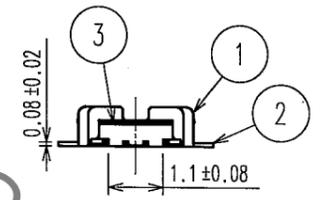




RECOMMENDED SOLDER PASTE: THICKNESS 120μm

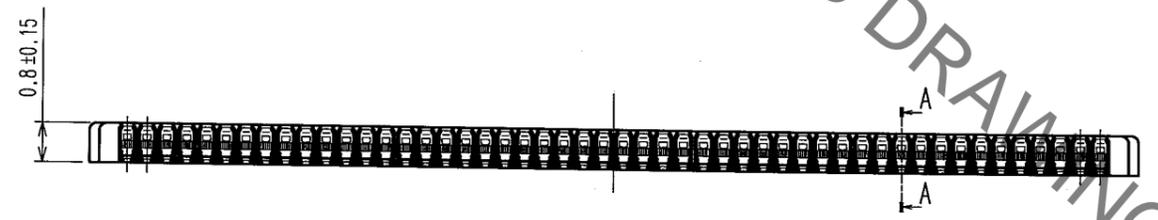

RECOMMENDED METAL MASK OPENING DIMENSIONS FOR LEAD PAD (20:1)



ENGAGEMENT FIGURE (20:1)

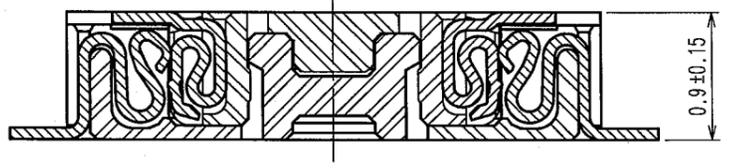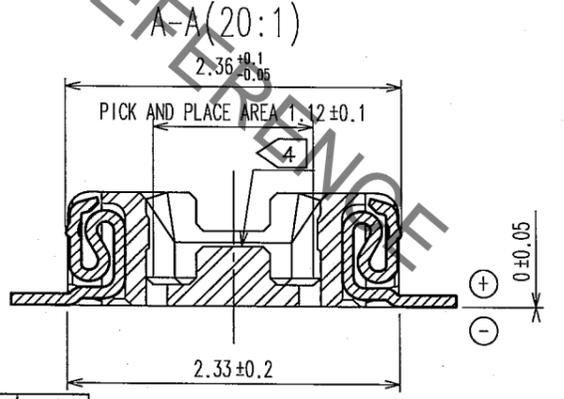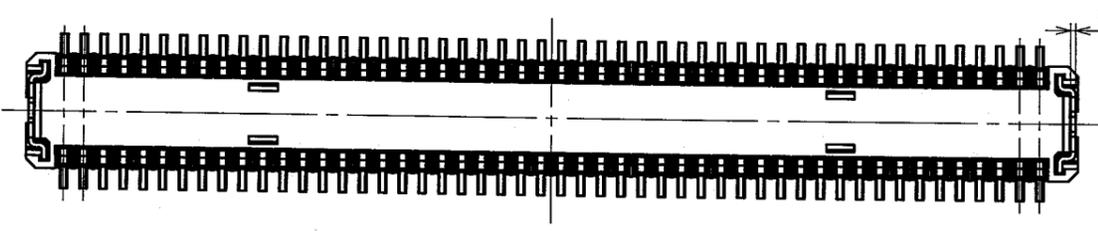

NOTE 1. ALL LEADS CO-PLANARITY SHALL BE 0.1 MAX.
2. PER REEL : 1000 CONNECTORS.
3. AT THE BEGINNING OF THE REEL, 100 mm AT MIN SHALL BE EMPTY POCKETS.
AT THE END OF THE REEL, 160 mm AT MIN SHALL BE EMPTY POCKETS.

- 4 NO CAVITY ON THE CONNECTORS LESS THAN 24 POS.
- 5 CONTACT PLATING SPECIFICATIONS.
CONTACT AREA : GOLD 0.05μm MIN.
SMT LEAD : GOLD 0.02μm MIN.
UNDERPLATING : NICKEL 1μm MIN.
(SURFACE : SEALING)
- 6 METAL HOLD DOWN PLATING SPECIFICATIONS.
MOUNTING AREA: TIN 1μm MIN.
UNDERPLATING : NICKEL 1μm MIN.
- 7. PEEL FORCE REFERS TO JIS C 0806.

PART NO.	CODE NO.	A	B	C	D	E
DF30FB-80DP-0.4V(82)	CL684-1136-0-82	17.14	15.6	3.2	16.64	17.44
DF30FB-70DP-0.4V(82)	CL684-1075-8-82	15.14	13.6	2.8	14.64	15.44
DF30FB-60DP-0.4V(82)	CL684-1074-5-82	13.14	11.6	2.4	12.64	13.44
DF30FB-50DP-0.4V(82)	CL684-1135-8-82	11.14	9.6	2	10.64	11.44
DF30FB-40DP-0.4V(82)	CL684-1134-5-82	9.14	7.6	1.6	8.64	9.44
DF30FB-34DP-0.4V(82)	CL684-1133-2-82	7.94	6.4	1.36	7.44	8.24
DF30FB-30DP-0.4V(82)	CL684-1132-0-82	7.14	5.6	1.2	6.64	7.44
DF30FB-24DP-0.4V(82)	CL684-1131-7-82	5.94	4.4	1.2	5.44	6.24
DF30FB-22DP-0.4V(82)	CL684-1130-4-82	5.54	4.0	1.2	5.04	5.84
DF30FB-20DP-0.4V(82)	CL684-1129-5-82	5.14	3.6	1.2	4.64	5.44

NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
3	PHOSPHOR BRONZE	6	6	PS	PLASTIC REEL (BLACK)
2	PHOSPHOR BRONZE	5	5	POLYESTER	CLEAR (COVER TAPE)
1	LCP	UL94V-0, BLACK	4	PS	CLEAR (EMBOSSED CARRIER TAPE)


CODE NO. (OLD)	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
	A. Takahashi	A. Takahashi	T. Nijayoshi	M. Nakamura	
	'05.09.29	'05.09.29	05.09.29	05.09.30	

SCALE	DRAWING NO.	PART NO.
FREE	EDC3-303546-04	DF30FB-*DP-0.4V(82)
UNITS	mm	CODE NO.
		CL684-****-82


TO

Apr.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE

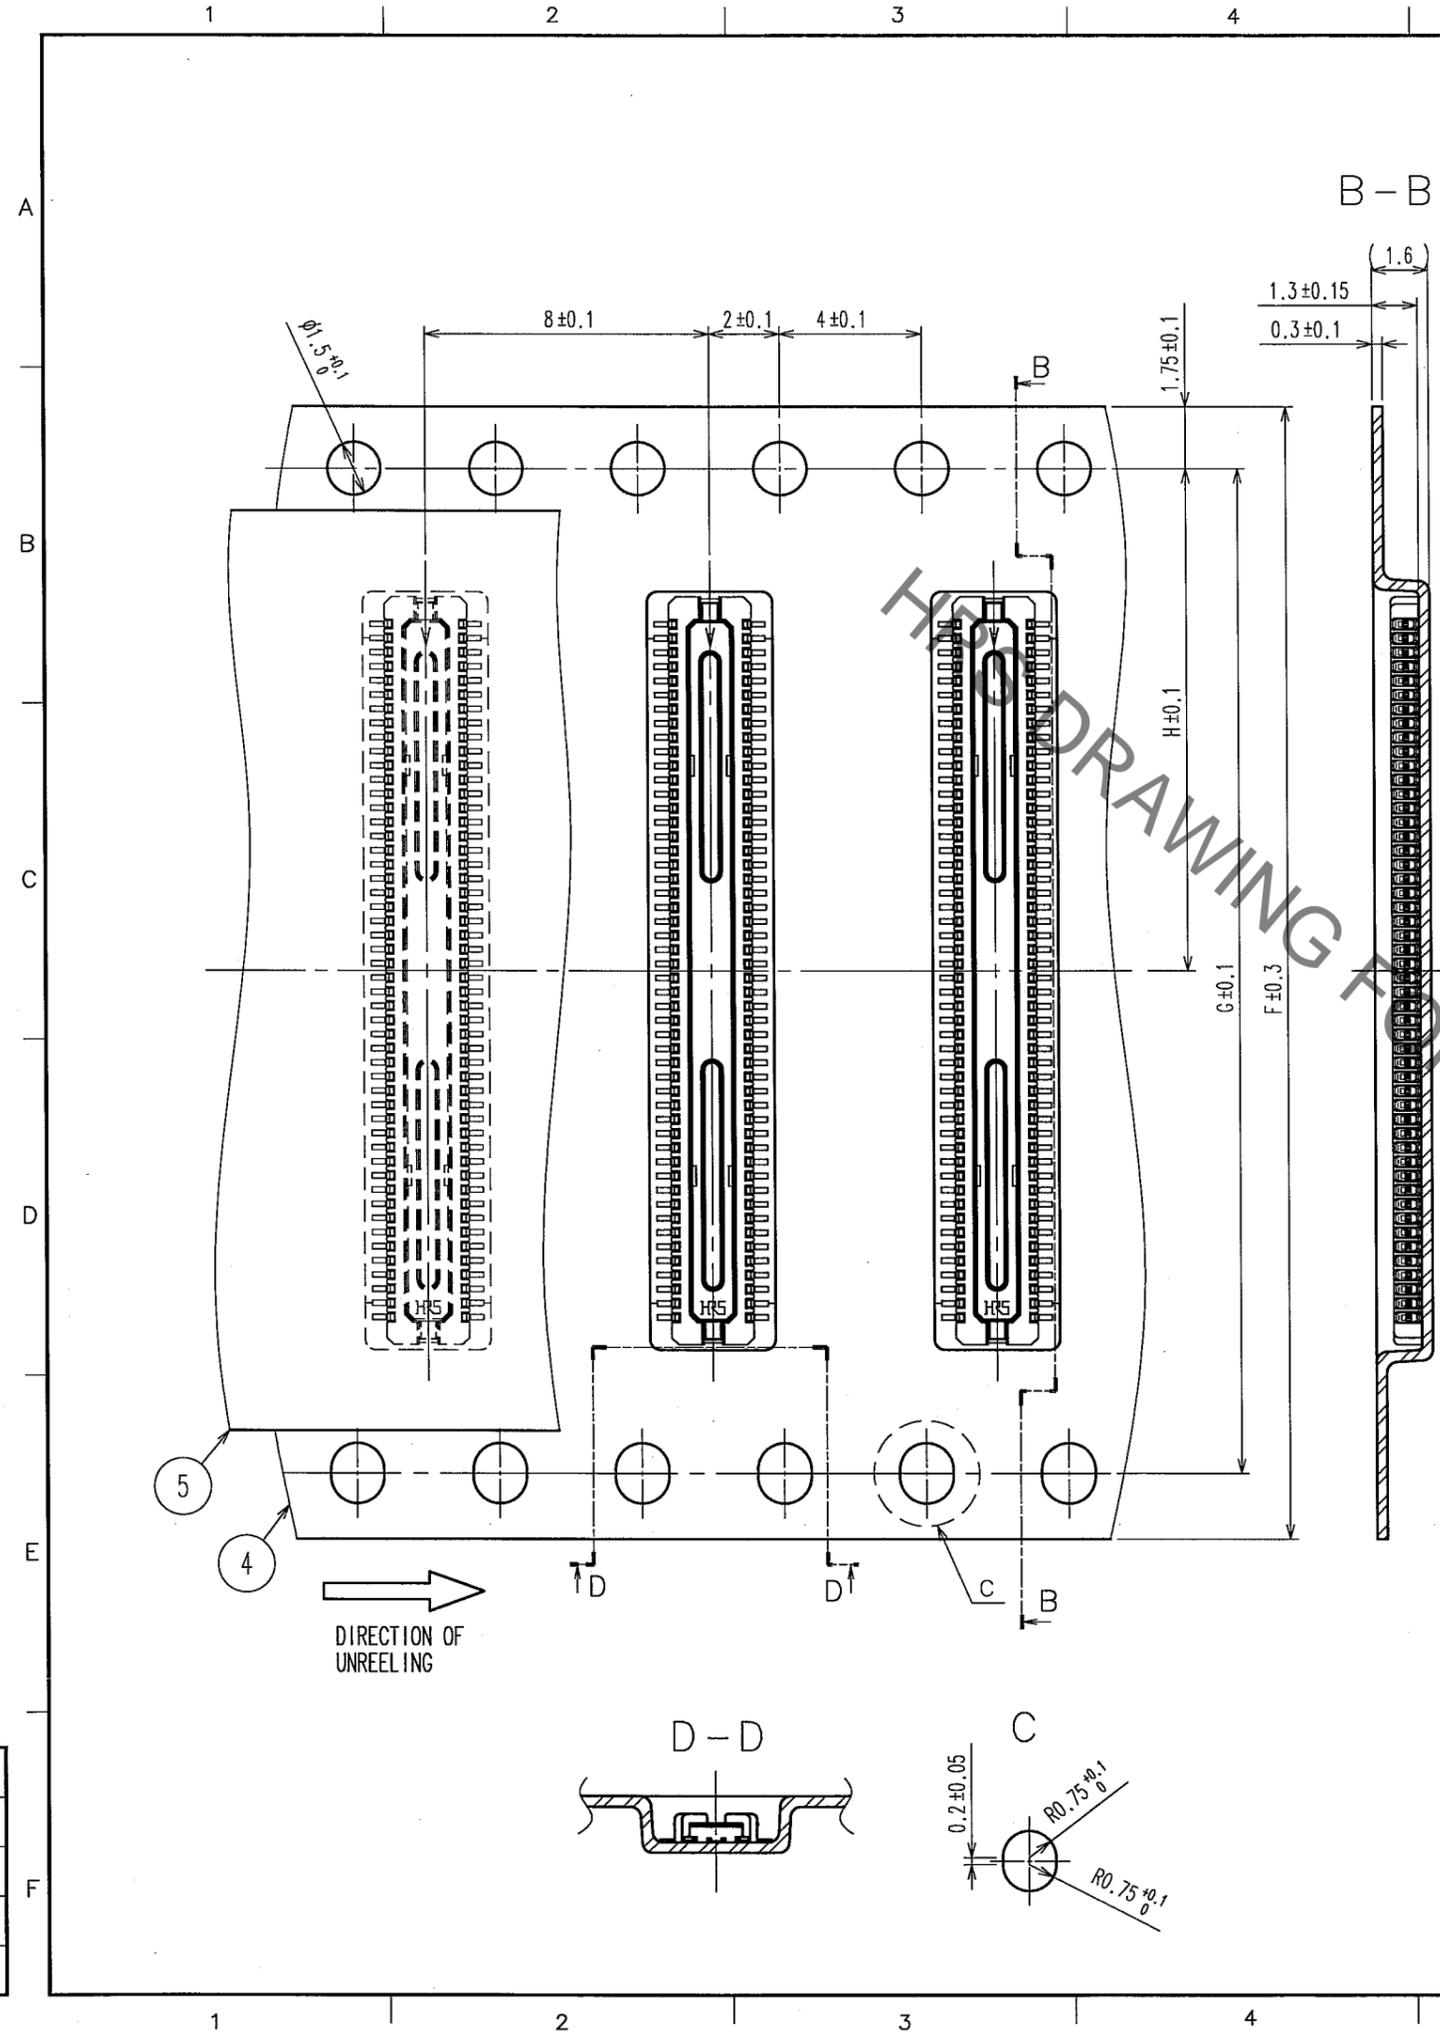

STYLE AND DIMENSION OF REEL (FREE SIZE)

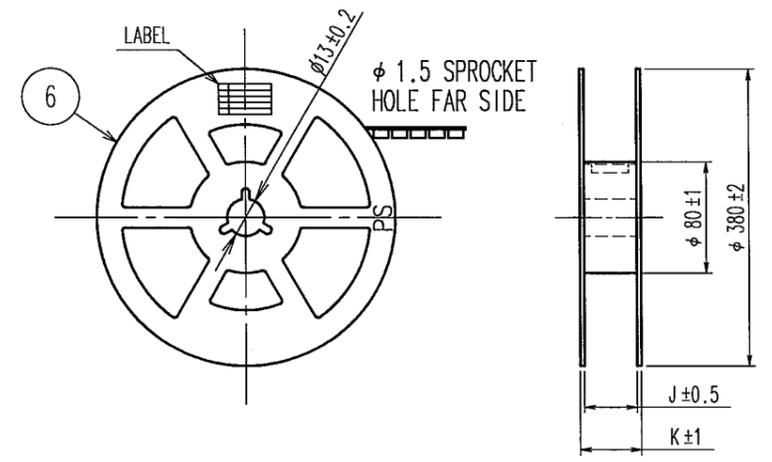

DETAIL OF PART NO. LABEL

SUPPLIER	
QUANTITY	
PART NO.	
CODE NO.	
DATE OF MANUFACTURED	
生産月日	年 月 日
図番	CL684-*****-82
品名	DF30FB-*DP-0.4V(82)
納入数量	1000個
納入者	ヒロセ電機(株)

PART NO.	CODE NO.	F	G	H	J	K
DF30FB-80DP-0.4V(82)	CL684-1136-0-82	24	-	11.5	25.5	29.5
DF30FB-70DP-0.4V(82)	CL684-1075-8-82	24	-	11.5	25.5	29.5
DF30FB-60DP-0.4V(82)	CL684-1074-5-82	24	-	11.5	25.5	29.5
DF30FB-50DP-0.4V(82)	CL684-1135-8-82	24	-	11.5	25.5	29.5
DF30FB-40DP-0.4V(82)	CL684-1134-5-82	16	-	7.5	17.5	21.5
DF30FB-34DP-0.4V(82)	CL684-1133-2-82	16	-	7.5	17.5	21.5
DF30FB-30DP-0.4V(82)	CL684-1132-0-82	16	-	7.5	17.5	21.5
DF30FB-24DP-0.4V(82)	CL684-1131-7-82	16	-	7.5	17.5	21.5
DF30FB-22DP-0.4V(82)	CL684-1130-4-82	16	-	7.5	17.5	21.5
DF30FB-20DP-0.4V(82)	CL684-1129-5-82	16	-	7.5	17.5	21.5

TO

CODE NO. (OLD)	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
	A. Takahashi	A. Takahashi	T. Miyajaki	M. Nakamura	
	'05.09.29	105.09.29	05.09.29	05.09.30	
DRAWING NO.	PART NO.				
EDC3-303546-04	DF30FB-*DP-0.4V(82)				
SCALE	CODE NO.				
5 : 1	CL684-*****-82				
UNITS					
mm					

1	2		3		4				
COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△	4	RE-H-06664	YM	TS	04.12.17	△			. .
△						△			. .
△						△			. .

■ NOTES WHEN MATING DF30 SERIES CONNECTORS.

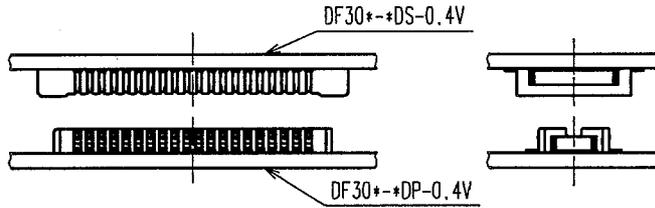


FIGURE-1

PLEASE LOCATE EACH CONNECTOR IN PARALLEL WHEN YOU PUT THEM IN MATING POSITION.

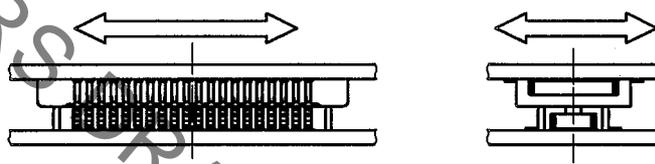


FIGURE-2

THE INSULATOR WILL BE DAMAGED AND THE CONTACTS WILL BE DEFORMED IF THE CONNECTORS ARE LOCATED INCLINED AND MATED BY EXCESSIVE FORCE.

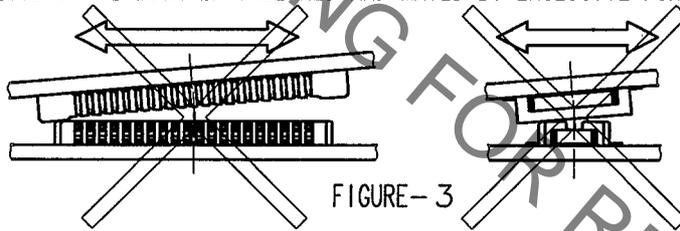


FIGURE-3

WHEN YOU LOCATE TWO CONNECTORS IN A PROPER POSITION, THEY WILL GO DOWN SLIGHTLY AT A LOWER LEVEL AND YOU WILL FIND THAT THEY GET LOCATED CORRECTLY. PLEASE MATE EACH CONNECTOR IN PARALLEL AFTER YOU CONFIRMED THAT THEY GO DOWN LOWER TO SOME EXTENT.

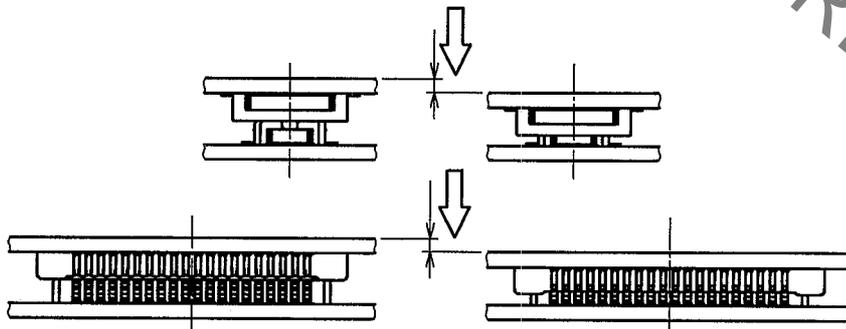


FIGURE-4

THE MATED CONDITIONS CAN BE RELEASED BY A DROP IMPACT OR THE APPLIED FORCE CAUSED BY FPC-HANDLING. FIX THE CONNECTORS BY APPLYING PRESSURE IN THE MATING DIRECTION WITH THE DEVICE OR A BUFFER MATERIAL.

CODE NO. (OLD)		DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
		Y.MICHIDA	A.TAKAHASHI	T.SAKATA	T.OMA	
NOTES WHEN MATING		04.12.16	04.12.16	04.12.16	04.12.16	
DRAWING NO.		PART NO.				
EDSC4-830174		DF30 Series				
SCALE		CODE NO.				
FREE : 1		CL684				
UNITS						
mm						
HRS						
HIROSE ELECTRIC CO.,LTD.						
				1/3		

In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

TO

Apr.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

1			2			3			4					
COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					△									.
△					△									.
△					△									.

■ NOTES WHEN EXTRACTING

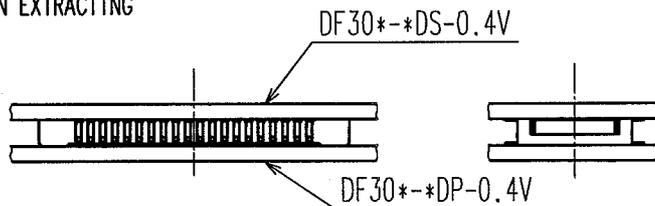


FIGURE-5

WHEN YOU EXTRACT CONNECTORS, PLEASE EXTRACT IN PARALLEL.

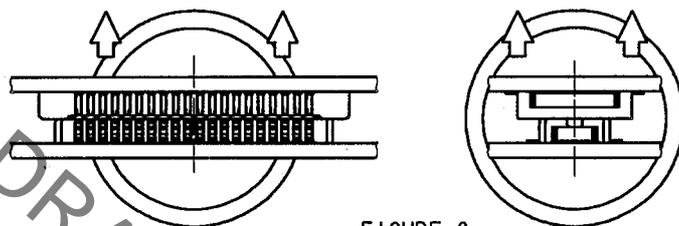


FIGURE-6

⚠ IF YOU'RE UNABLE TO EXTRACT IN PARALLEL DUE TO SET STRUCTURE OR SPACE, PLEASE EXTRACT AS FIGURE-7 (IN LONGER DIMENSION). PLEASE BE CAREFUL NOT TO DAMAGE CONTACTS AT SIDES, WHERE STRESS IS LIKELY TO GATHER WHEN CONNECTORS ARE MOUNTED ON SOFT FPC.

⚠ ESPECIALLY, PLEASE DO NOT EXTRACT FROM THE CORNER AS FIGURE-8. IT GIVES CRITICAL STRESS TO THE CONTACTS ON THE CROSS CORNER.

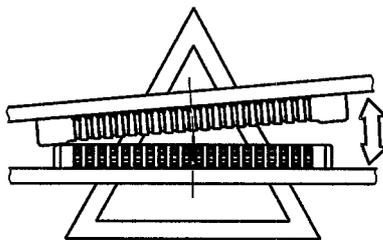


FIGURE-7

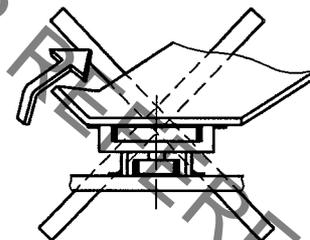


FIGURE-8

⚠ PLEASE DO NOT EXTRACT AS FIGURE-9. THE STRESS CONCENTRATES ON ONE ROW, AND MIGHT DAMAGE CONNECTORS TO MALFUNCTION.




FIGURE-9

CODE NO. (OLD)		DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
		Y.MICHIDA	A.TAKAHASHI	T.SAKATA	T.OMA	
NOTES WHEN EXTRACTING		04.12.16	04.12.16	04.12.16	04.12.16	
 SCALE FREE : 1 UNITS mm	DRAWING NO.	PART NO.				
	EDSC4-830174	DF30 Series				
	HRS HIROSE ELECTRIC CO.,LTD.	CODE NO.	CL684	2/3		

Apr.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

1		2			3			4		
COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	
△					△				• •	
△					△				• •	
△					△				• •	

⚠ WHEN FPC IS SOFT, STRESS IS CONCENTRATED ON THE CONTACTS AT CORNERS.
PLEASE PAY ATTENTION TO THIS POINT AND DO NOT UNMATE CONNECTORS FROM CORNERS AS FIGURE-10.
THIS GIVES SERIOUS DAMAGE ON CONTACTS, AND OCCURS SOLDER PEEL-OFF OR CONTACT COME-OFF.

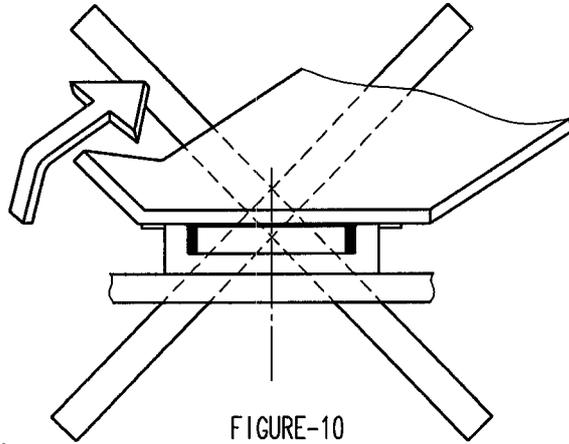


FIGURE-10

IF YOU MOUNT PLUG CONNECTOR ON FPC, CONTACTS MIGHT COME OFF FROM HOUSING MOLD.
CONTACT MIGHT COME OFF FROM HOUSING MOLD.

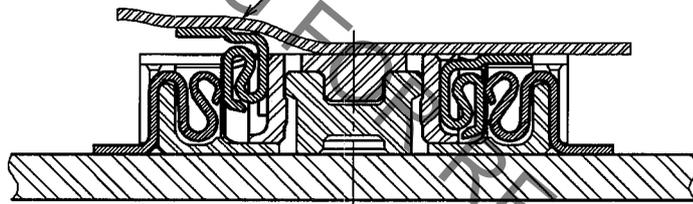


FIGURE-11

IN CASE YOU MOUNT RECEPTACLE CONNECTOR ON FPC, THERE IS NO RISK OF CONTACT COME-OFF.
HIROSE RECOMMEND THAT RECEPTACLE IS MOUNTED ON FPC.

IN ORDER TO AVOID THIS RISK, IT IS RECOMMENDED THAT YOU MOUNT RECEPTACLE CONNECTOR ON FPC.

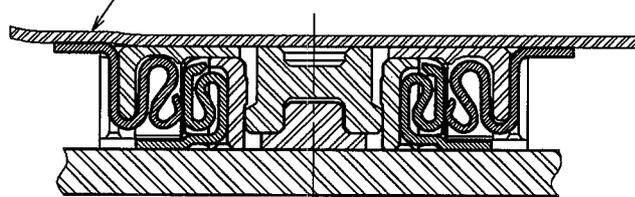



FIGURE-12

CODE NO. (OLD)		DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
		Y.MICHIDA	A.TAKAHASHI	T.SAKATA	T.OMA	
NOTES WHEN EXTRACTING (SUPPLEMENTARY DATA)		04.12.16	04.12.16	04.12.16	04.12.16	
 SCALE FREE : 1 UNITS mm	DRAWING NO. EDSC4-830174		PART NO. DF30 Series			
	 HIROSE ELECTRIC CO.,LTD.		CODE NO. CL684		3 3	



Apr.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

1			2			3			4					
COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					△					△				
△					△					△				
△					△					△				

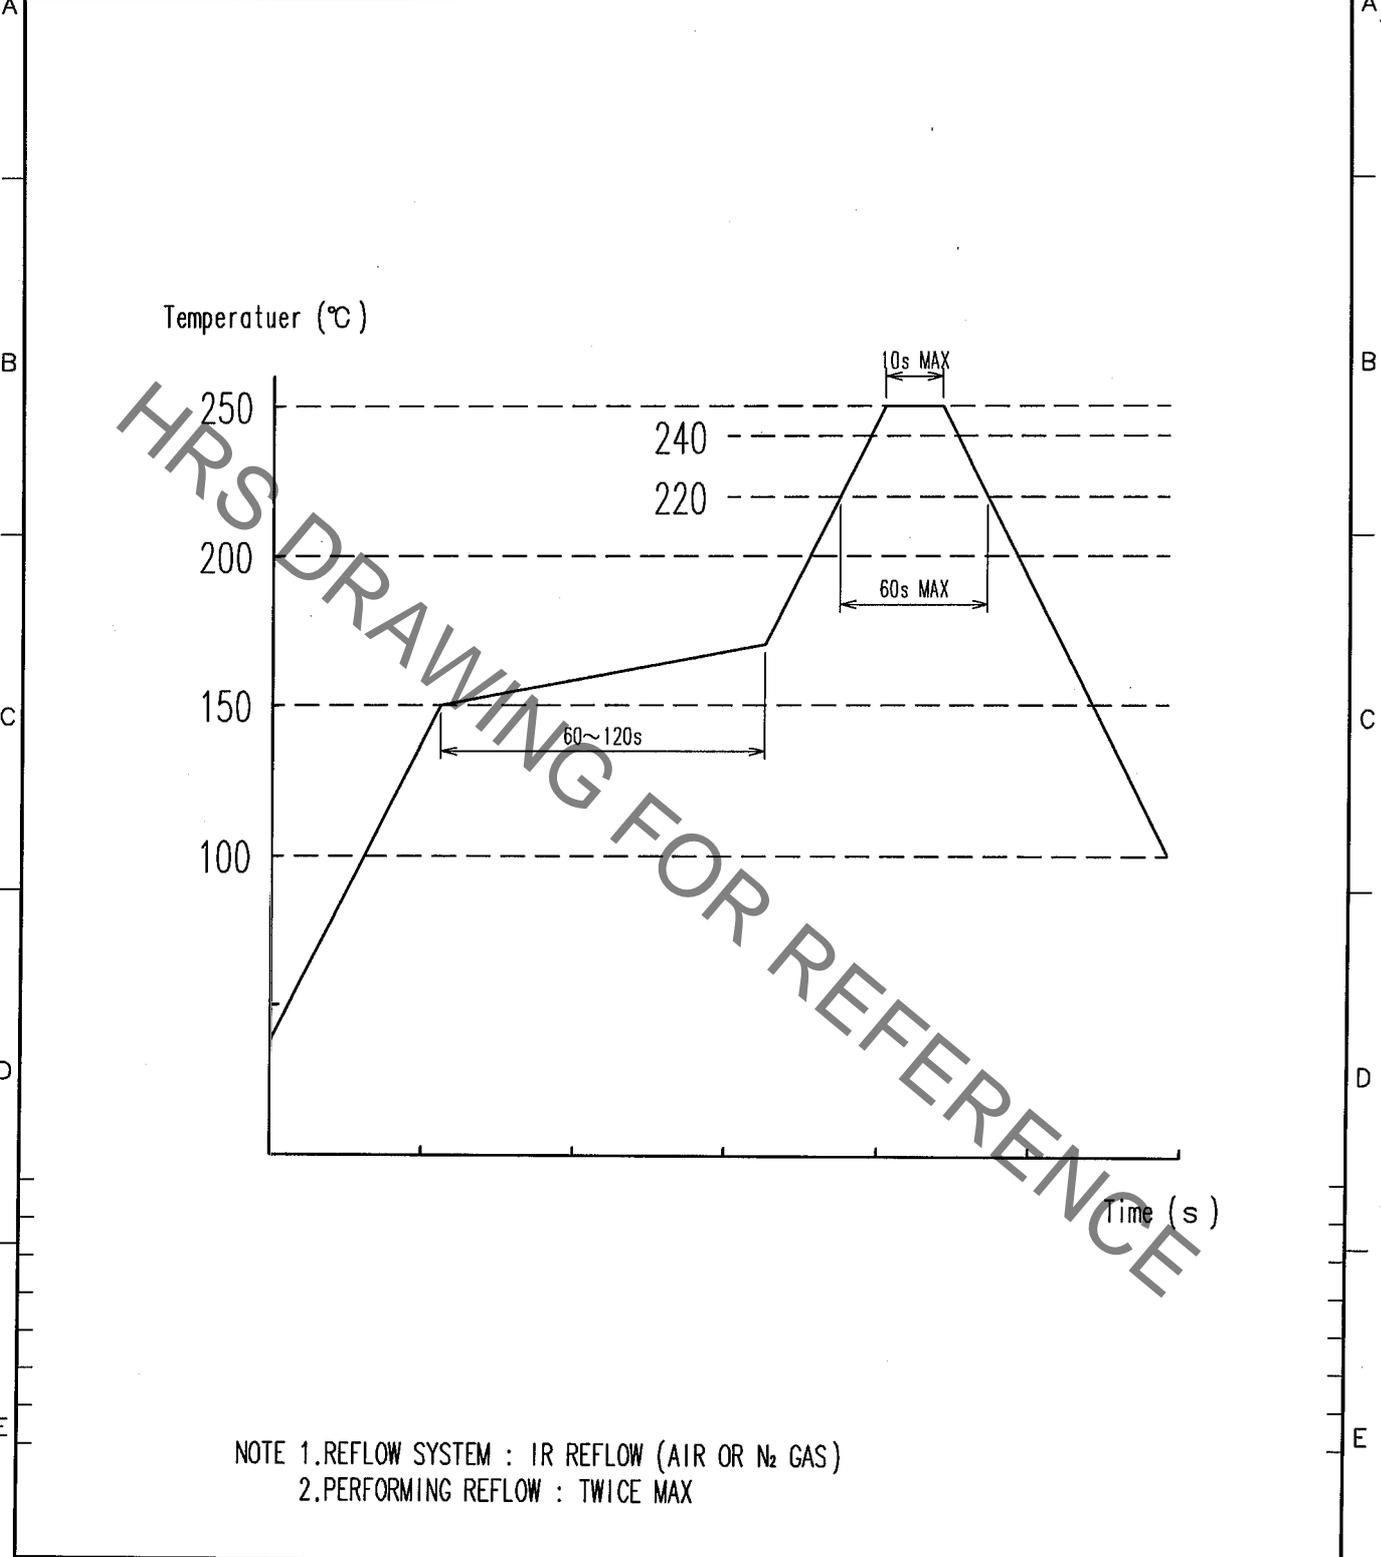

NOTE 1.REFLOW SYSTEM : IR REFLOW (AIR OR N₂ GAS)
2.PERFORMING REFLOW : TWICE MAX

NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD)			DRAWN	DESIGNED	CHECKED
			T.NISHI	W.Fukuchi	J. Jomiko
			03.08.19	03.08.19	03.08.20
					APPROVED
					J. Ona
					RELEASED
DRAWING NO. EDC4-830116			PART NO. DF30-*DS/DP-0.4V		
SCALE FREE			CODE NO. CL684		
UNITS mm					
HRS HIROSE ELECTRIC CO.,LTD.					

TO

