

NOTES: ±.001


- ① MAT'L: COPPER (STOCK TKN. $\frac{.040}{1.02}$)
- PLATING: ELECTRO TIN (.0003 MIN)
- ② TIN-PLATED BRASS FUNNEL FERRULE

STUD SIZES: ($\pm .005$)

02 = .094	413 = 413
04 = .119	76 = 453
06 = .146	12 = 515
08 = .173	
10 = .198	
14 = .265	
56 = .328	
38 = .390	
209 = .209	

"UL" LISTING # E32244
 "CSA" LISTING # 18689

ALL DIMENSIONS = $\frac{\text{INCHES}}{\text{MM}}$ (MWID) DENOTES MAXIMUM WIRE INSULATION DIAMETER

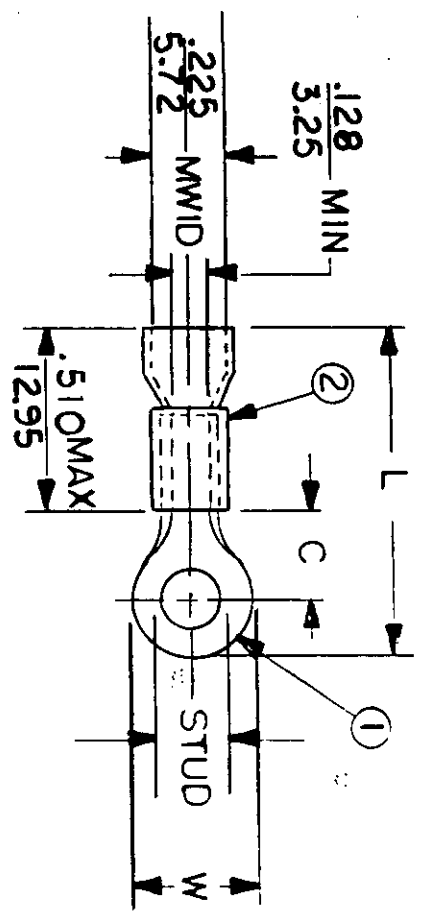

PART NUMBER	"W"	"C" MIN.	"L" MAX.	REFERENCE	SCALE	NTS	DATE	TITLE	DWG. NO.	A	CUSTOMER DWG
C-401-	.750 ±.010	.611 15.52	1.531 38.89								
C-428-	.375 9.53	.303 7.70	1.036 26.31								
C-430-	.530 13.46	.393 9.98	1.203 30.56								
C-436-	.282 7.16	.306 7.77	.992 25.20								
C-440-	.592 15.04	.468 11.84	1.307 33.20								
DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED									RING TONGUE TERMINAL VIBRAKIMP 400-SERIES		
FRAC. DEC. ANG.									EIC mox INCORPORATED		
± ± ±									DRAWN BY: JJ		
									CHKD. BY: GZ		
									APPRD. BY:		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[19072-0087](#)