


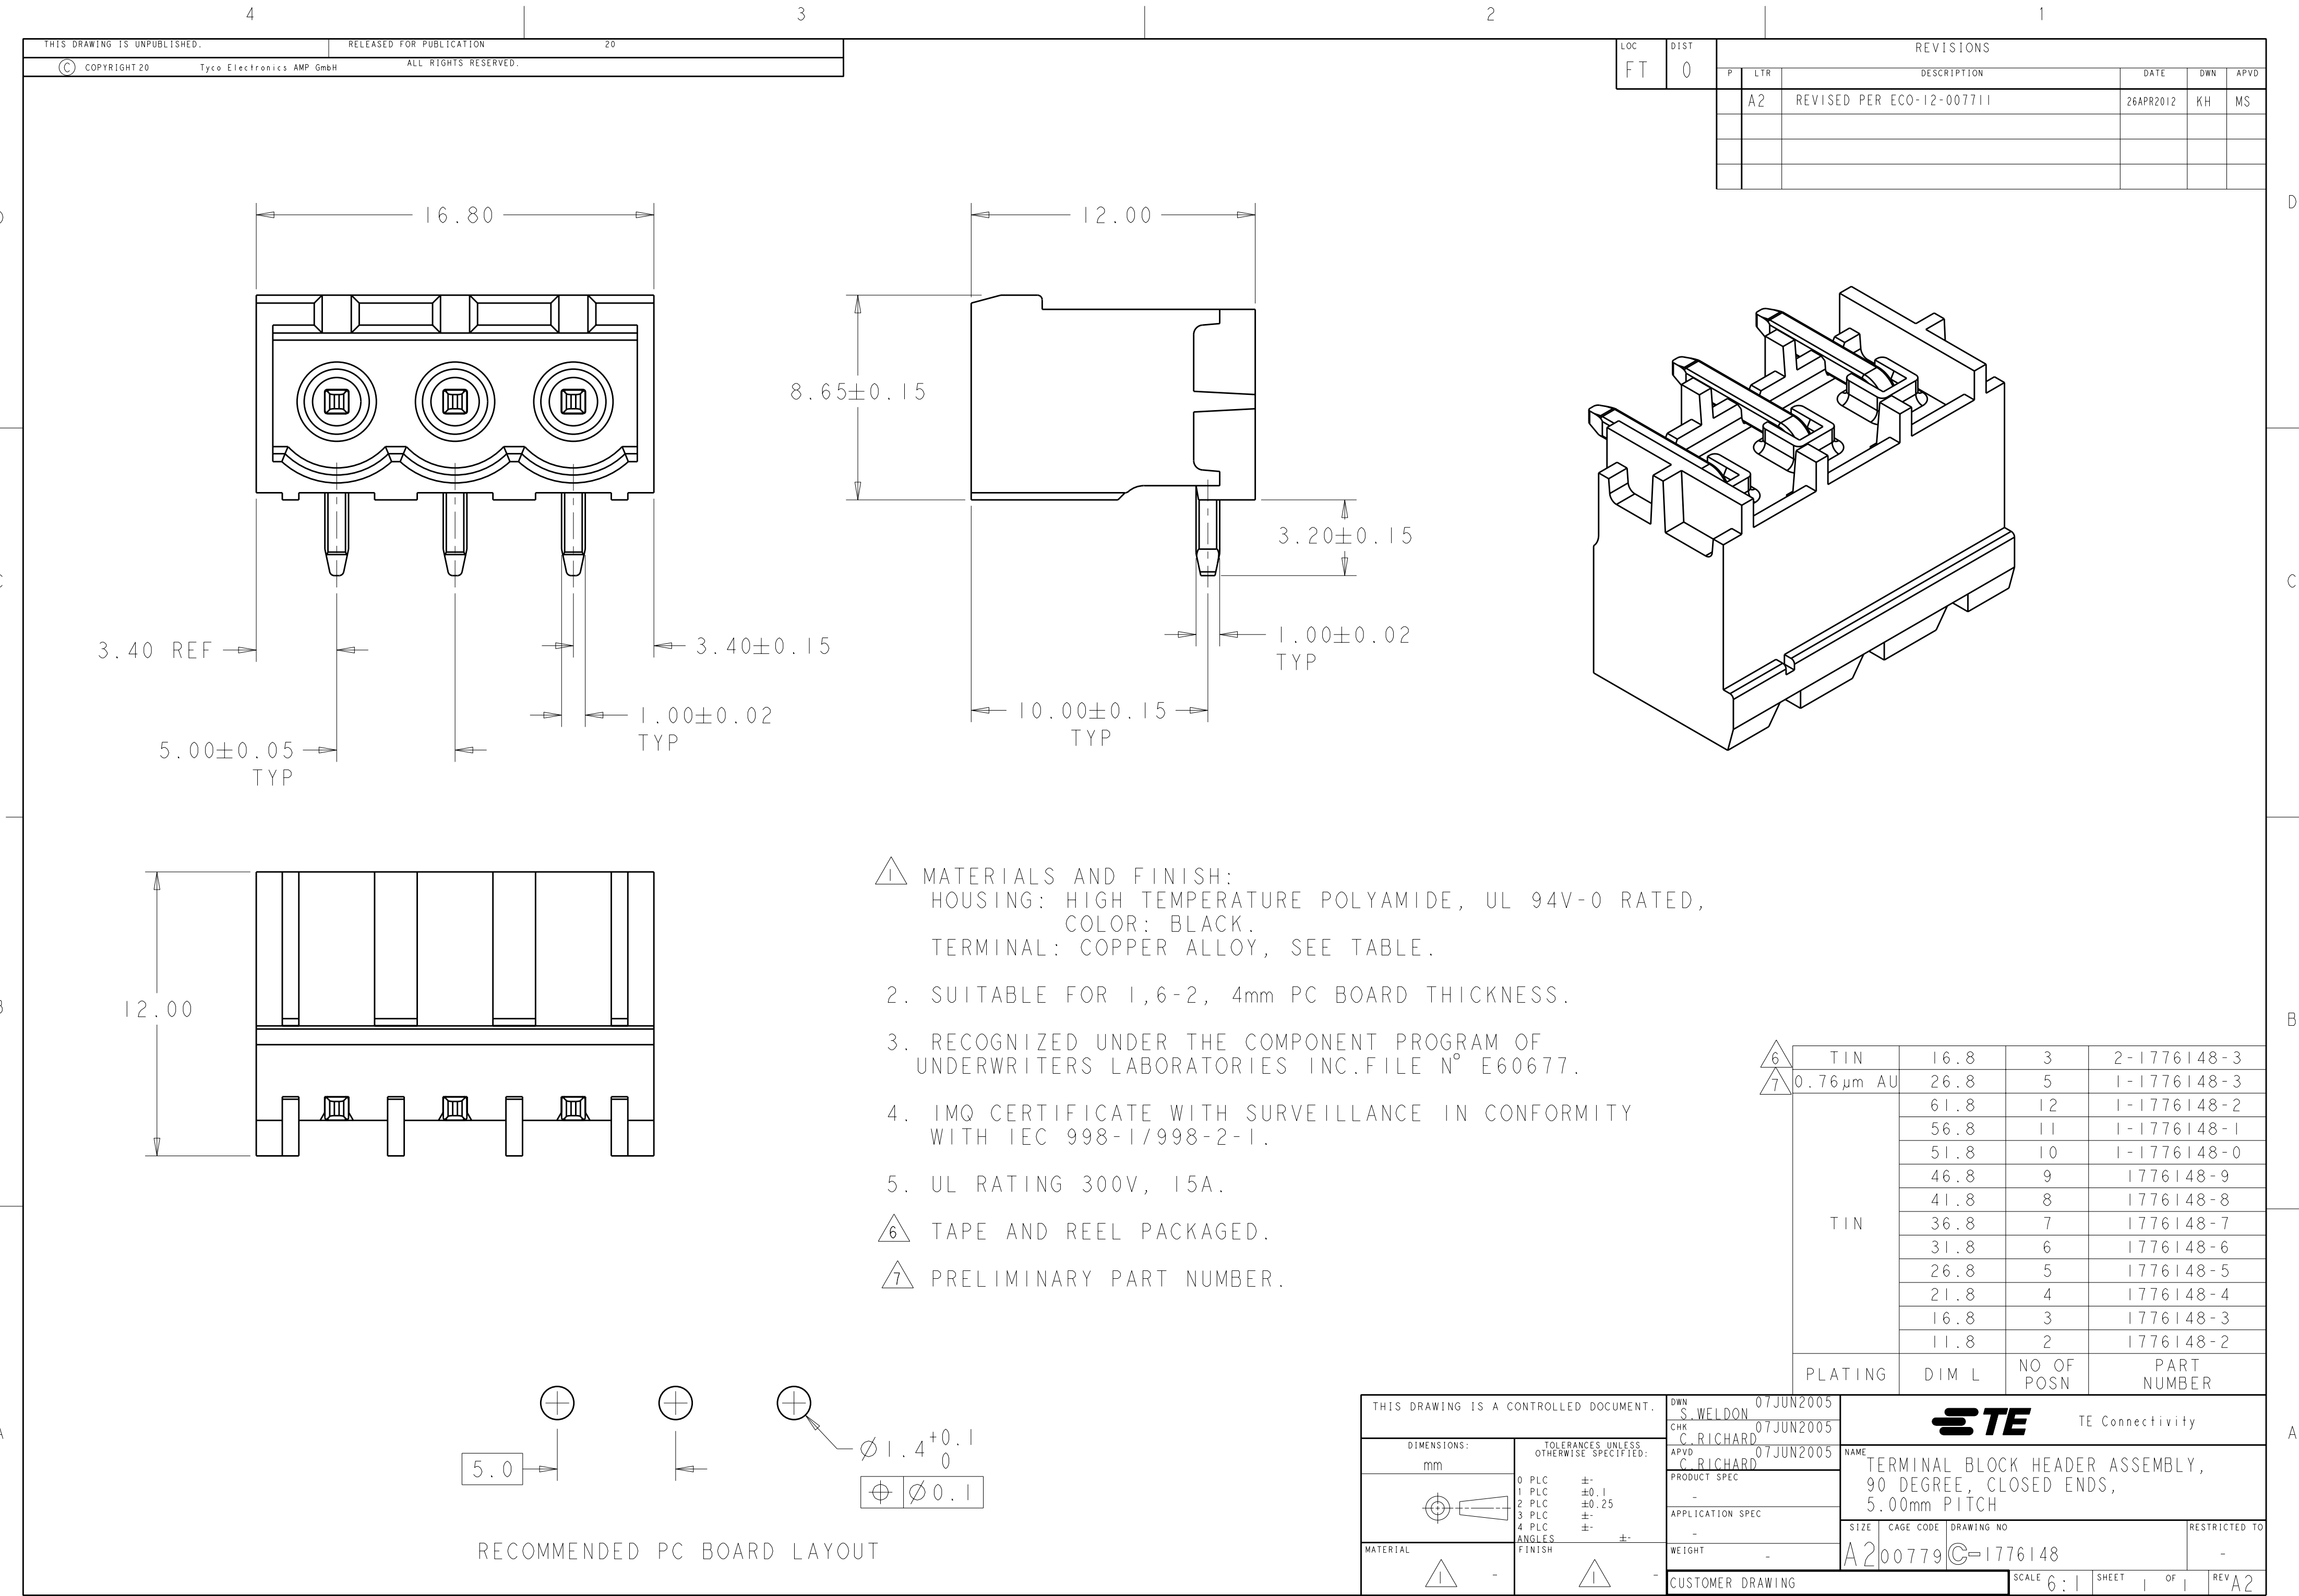

1

MATERIALS AND FINISH:

HOUSING: HIGH TEMPERATURE POLYAMIDE, UL 94V-0 RATED,

COLOR: BLACK.

TERMINAL: COPPER ALLOY, SEE TABLE.

2

SUITABLE FOR 1,6-2, 4mm PC BOARD THICKNESS.

3

RECOGNIZED UNDER THE COMPONENT PROGRAM OF UNDERWRITERS LABORATORIES INC.FILE N° E60677.

4

IMQ CERTIFICATE WITH SURVEILLANCE IN CONFORMITY WITH IEC 998-1/998-2-1.

5

UL RATING 300V, 15A.

6

TAPE AND REEL PACKAGED.

7

PRELIMINARY PART NUMBER.

6

TIN

16.8

3

2-1776148-3

7

0.76 µm AU

26.8

5

1-1776148-3

TIN

61.8

12

1-1776148-2

56.8

11

1-1776148-1

51.8

10

1-1776148-0

46.8

9

1776148-9

41.8

8

1776148-8

36.8

7

1776148-7

31.8

6

1776148-6

26.8

5

1776148-5

21.8

4

1776148-4

16.8

3

1776148-3

11.8

2

1776148-2

PLATING

DIM L

NO OF POSN

PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN S.WELDON 07JUN2005

CHK C.RICHARD 07JUN2005

APVD C.RICHARD 07JUN2005

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

DIMENSIONS:

mm

0 PLC

±

1 PLC

±0.1

2 PLC

±0.25

3 PLC

±

4 PLC

±

ANGLES

±

FINISH

±

1

1

NAME

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

TE Connectivity

TERMINAL BLOCK HEADER ASSEMBLY, 90 DEGREE, CLOSED ENDS, 5.00mm PITCH

A200779

C-1776148

SCALE 6:1

SHEET 1 OF 1

REV A2

RECOMMENDED PC BOARD LAYOUT

1471-9 (3/11)

Pro/ENGINEER DRAWING

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-1776148-3](#)