
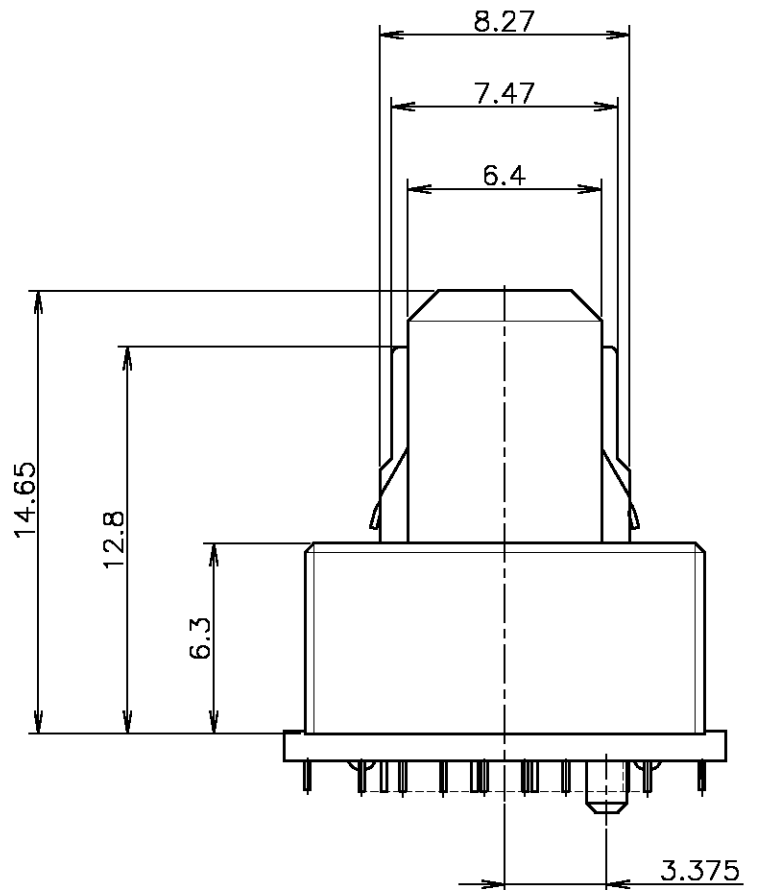
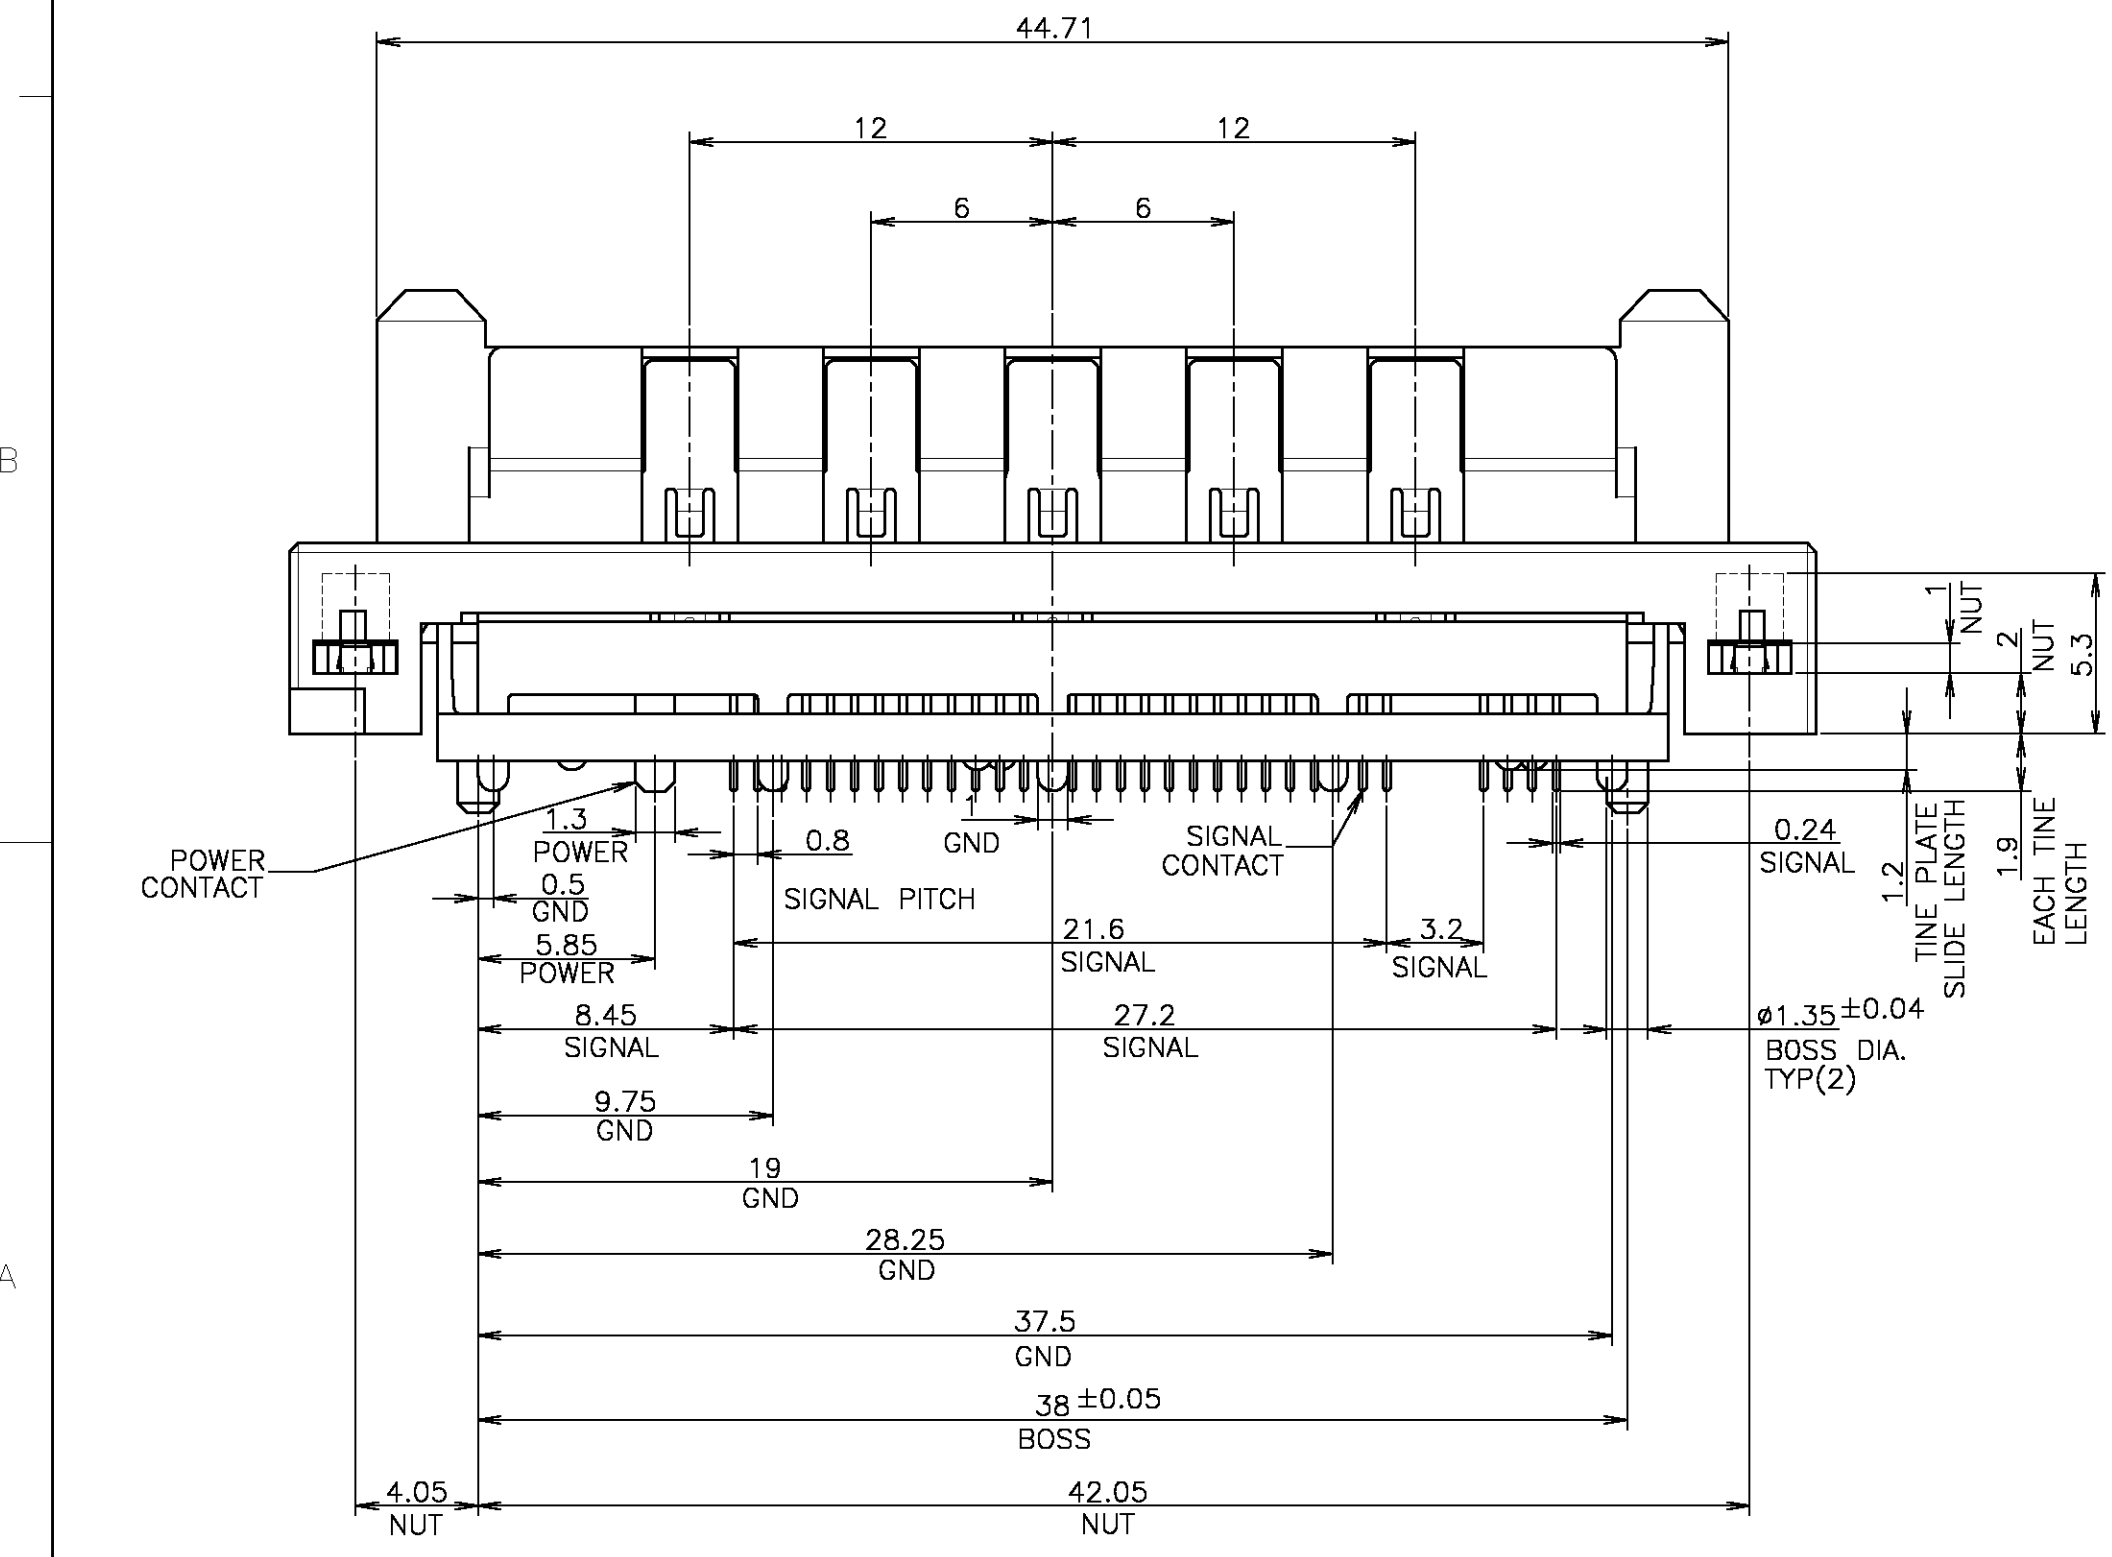
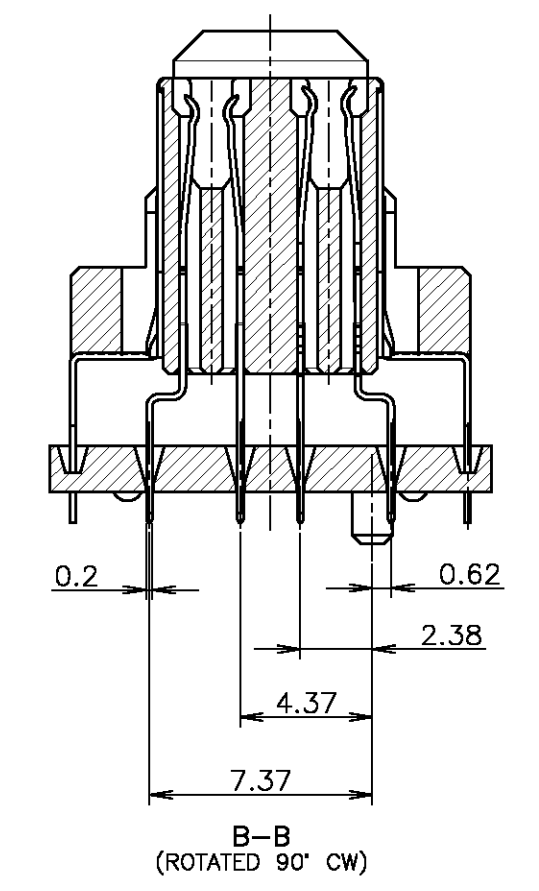
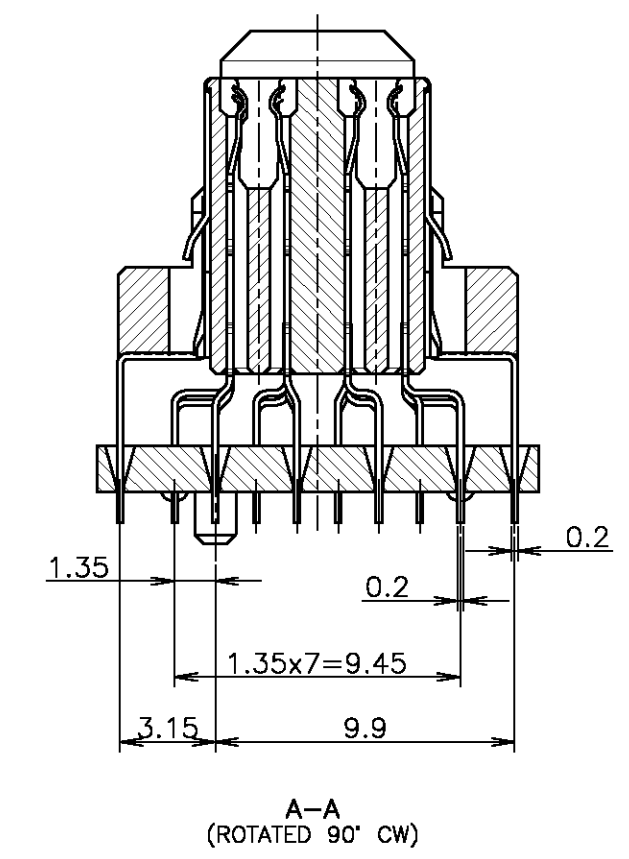


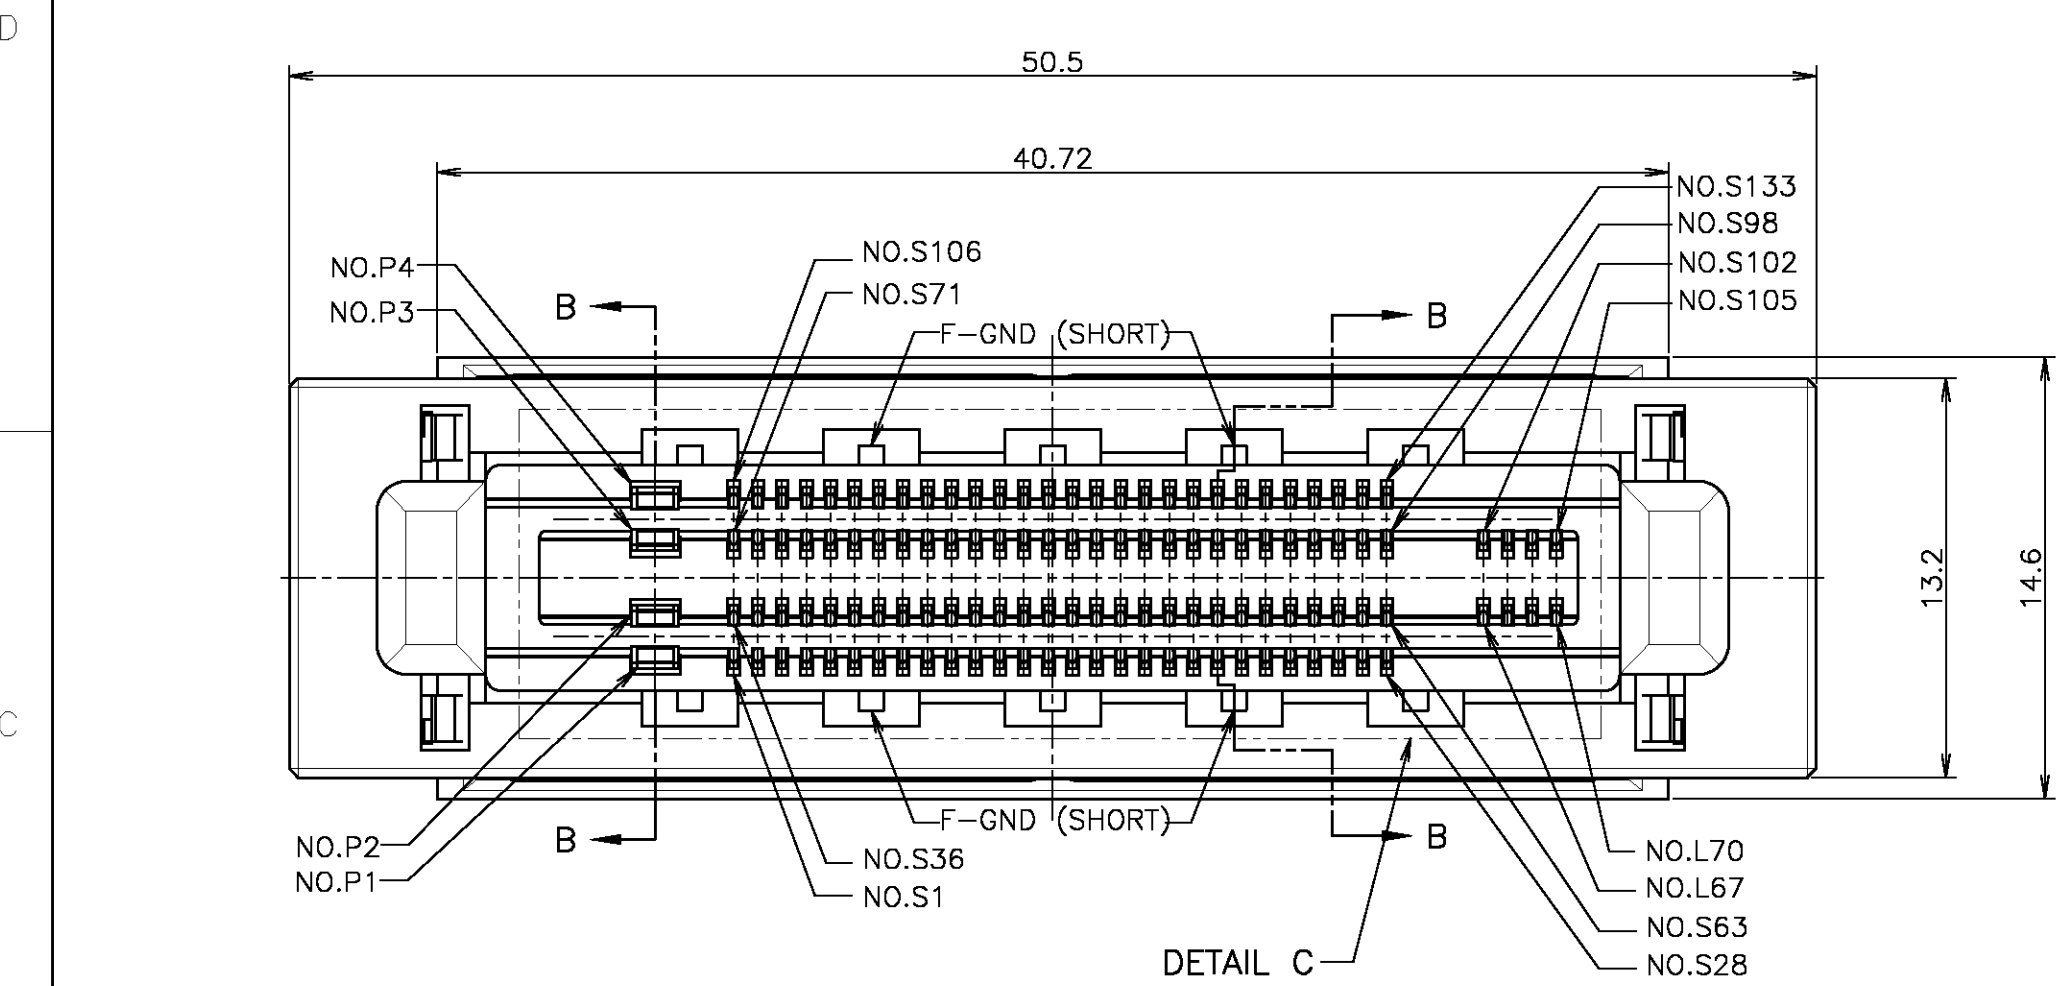

-1; AS SHOWN



THE NUMBER OF PINS
SIGNAL 112P
POWER 4P
LAN 8P
VOID 20P

D

C

B

A

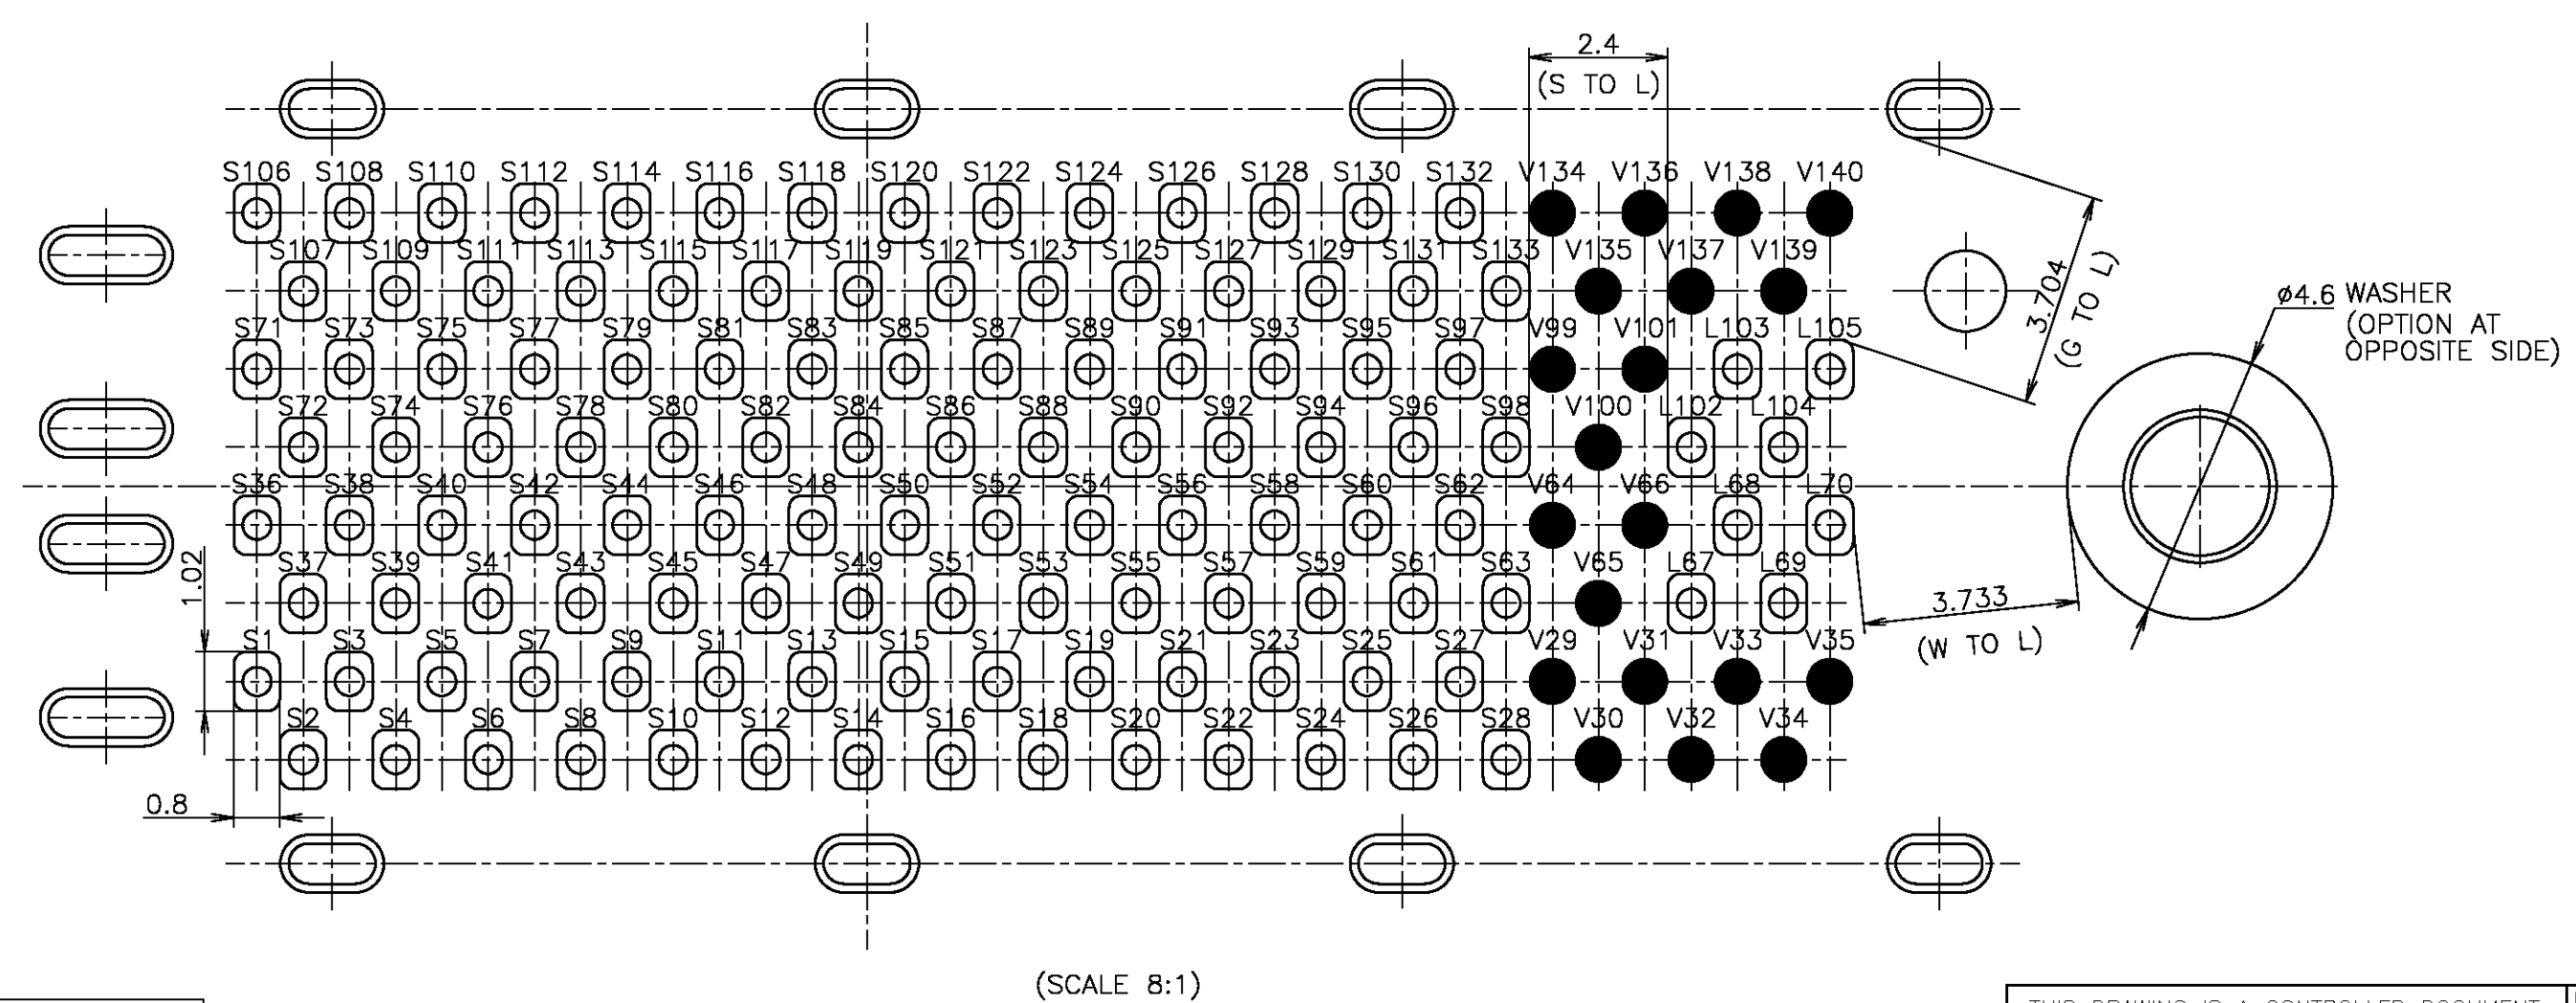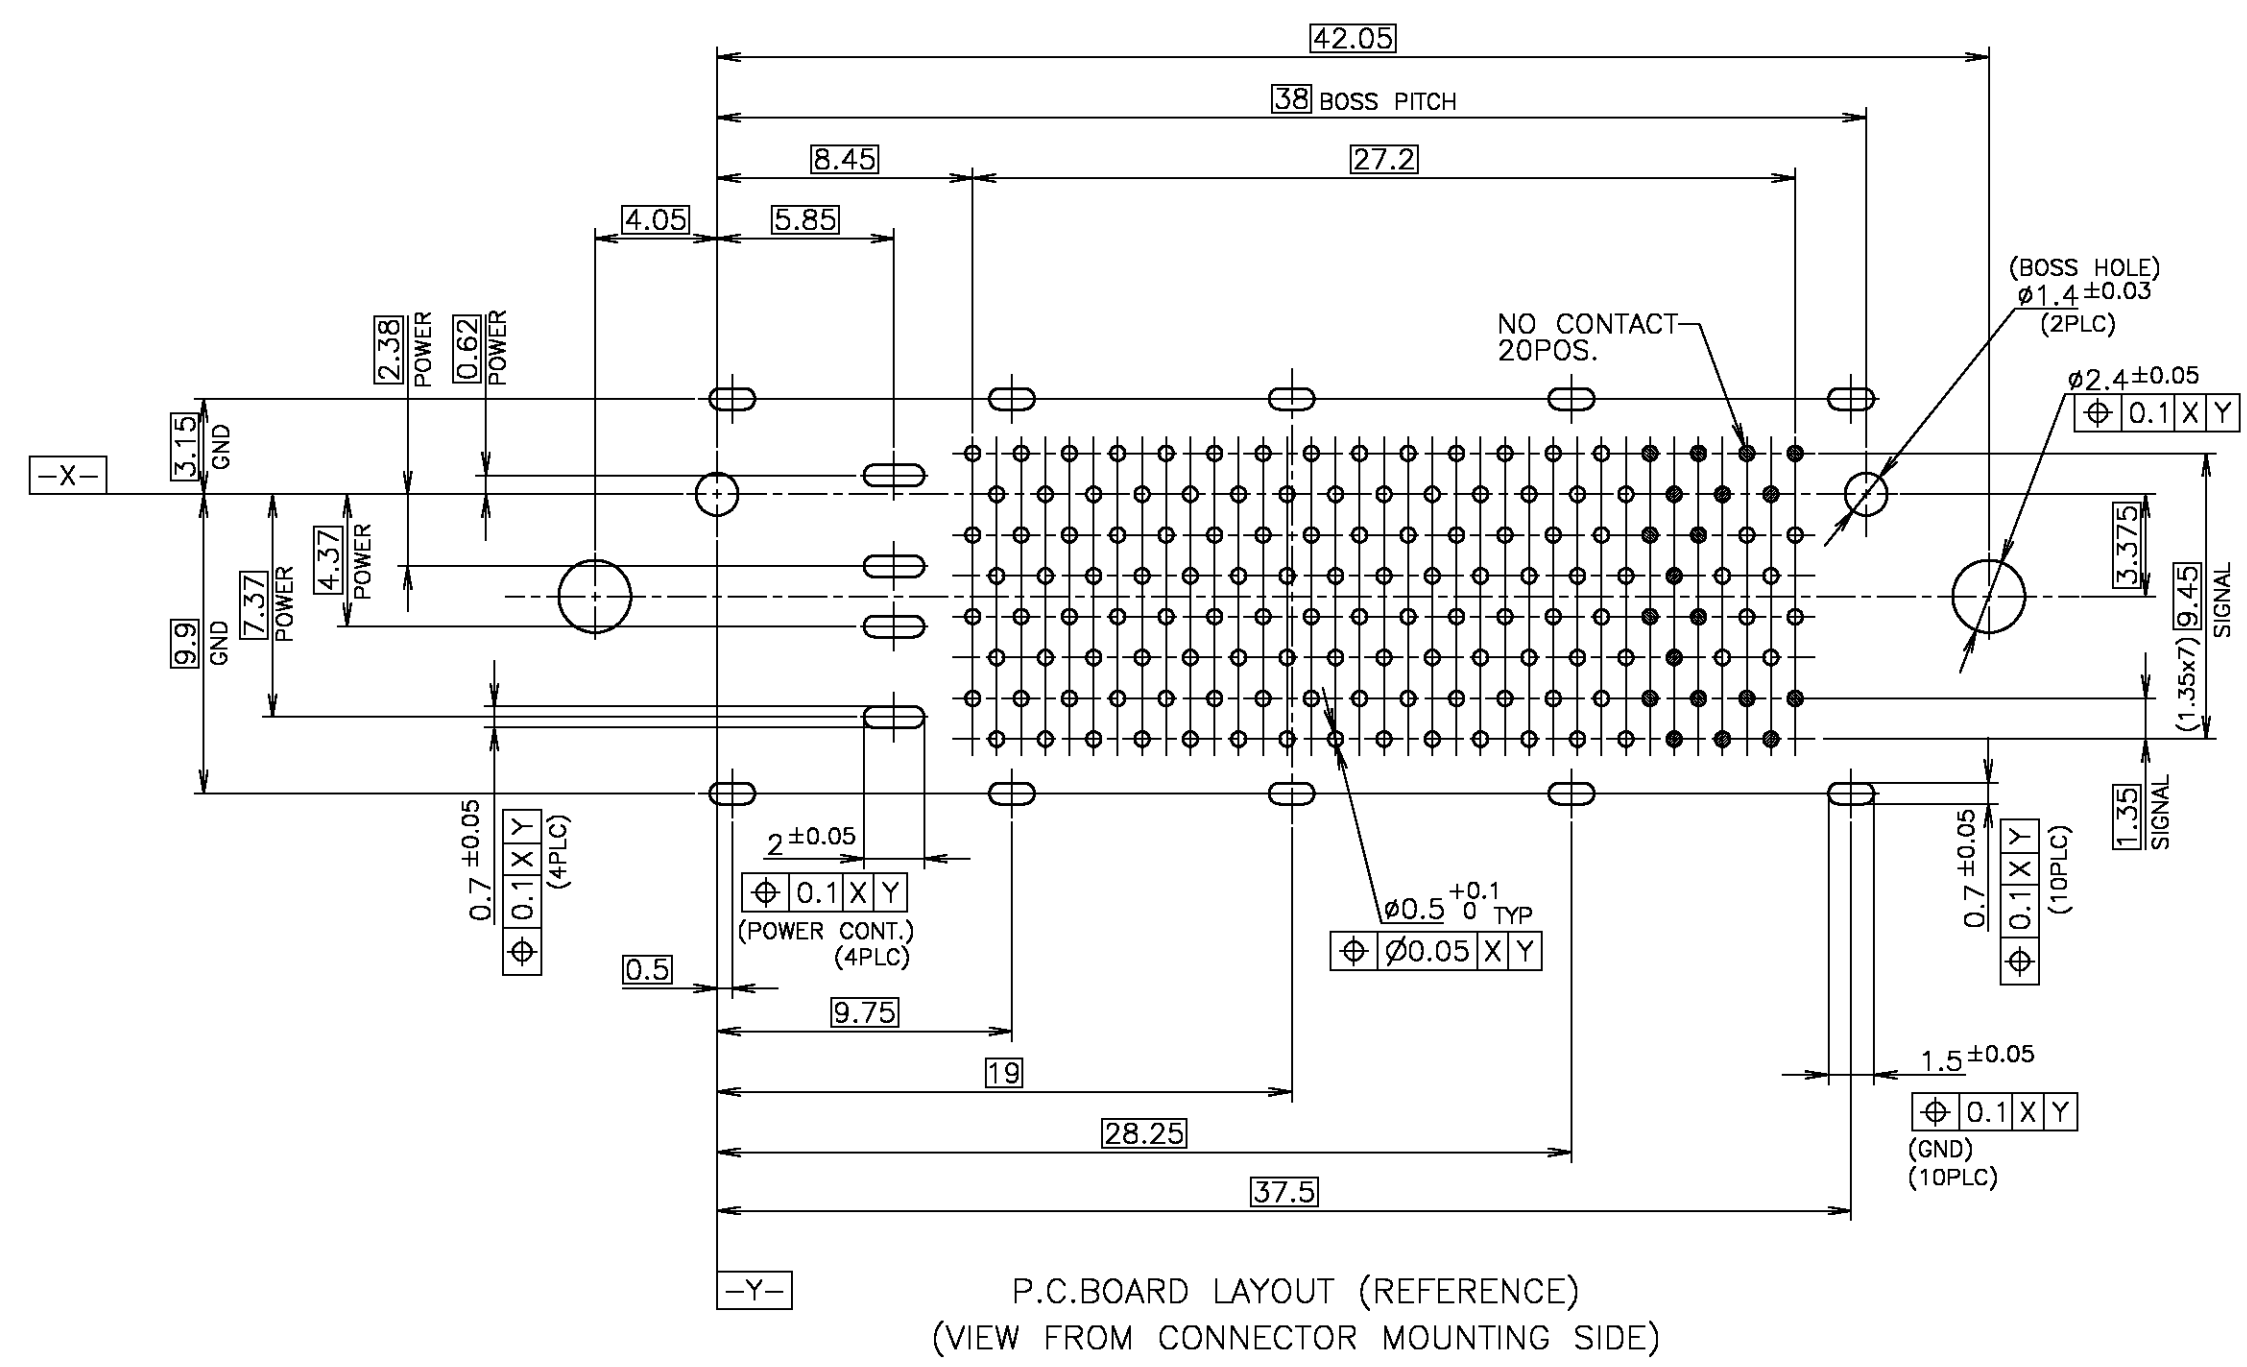


S27
CIRCUIT NO.
S: SIGNAL
P: POWER
V: VOID
L: LAN

- 材質
ハウジング：熱可塑性樹脂 UL94V-0，黒
タインプレート：熱可塑性樹脂 UL94V-0，黒
シグナルコンタクト：銅合金
パワーコンタクト：銅合金
グランドプレート：銅合金
ナット：ステンレス鋼
トレイ：PS t=0.8，白
- 仕上
シグナルコンタクト&パワーコンタクト：
ニッケル下地接点部金めっき、はんだ付け部すずめっき
グランドプレート：すずめっき（リフロー）
- 3 適用基板厚：1.45±0.1mm
4 かん合相手型番：1903848-1
：2040472-1，2040928-1
- 推奨ねじ締め付けトルク：
0.15N・m(1.5kgf・cm)から0.2N・m(2kgf・cm)
- 6 梱包：32EA/トレイ
- MATERIAL
HOUSING: THERMOPLASTIC, UL94V-0, BLACK
TINE PLATE: THERMOPLASTIC, UL94V-0, BLACK
SIGNAL CONTACT: COPPER ALLOY
POWER CONTACT: COPPER ALLOY
GROUND PLATE: COPPER ALLOY
NUT: STAINLESS STEEL
TRAY: PS t=0.8, WHITE
- FINISH
SIGNAL CONTACT & POWER CONTACT:
Au PL. ON CONTACT AREA
Sn PL. ON SOLDER AREA
Ni UNDER PL. ALL OVER
GROUND PLATE:
Sn PL. (REFLOW)
- 3 APPLICABLE THICKNESS OF P.C.BOARD: 1.45±0.1mm
4 CONNECTOR TO BE MATED: 1903848-1
：2040472-1，2040928-1
- RECOMMENDED TIGHTENING TORQUE:
FROM 0.15N.m (1.5kgf.cm) TO 0.2N.m (2kgf.cm)
- 6 PACKAGING: 32EA/TRAY

GENERAL TOLERANCE
一般公差
10 ≥ : ±0.2
30 ≥ > 10: ±0.25
100 ≥ > 30: ±0.3
ANGLES: ±3°

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	Tyco Electronics Corporation Kawasaki, Japan		
DIMENSIONS: 単位：mm		CHK	NAME 名称		
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差		APVD	0.8 DOCKING CONNECTOR REC ASSY, 140P + POWER 4P		
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ±		PRODUCT SPEC 製品規格	SIZE A2	CAGE CODE 00779	DRAWING NO C=1903385
MATERIAL 材料		APPLICATION SPEC 取付適用規格	RESTRICTED TO		
FINISH 仕上		WEIGHT	SCALE 4:1	SHEET 2 of 5	REV A1
CUSTOMER DRAWING					

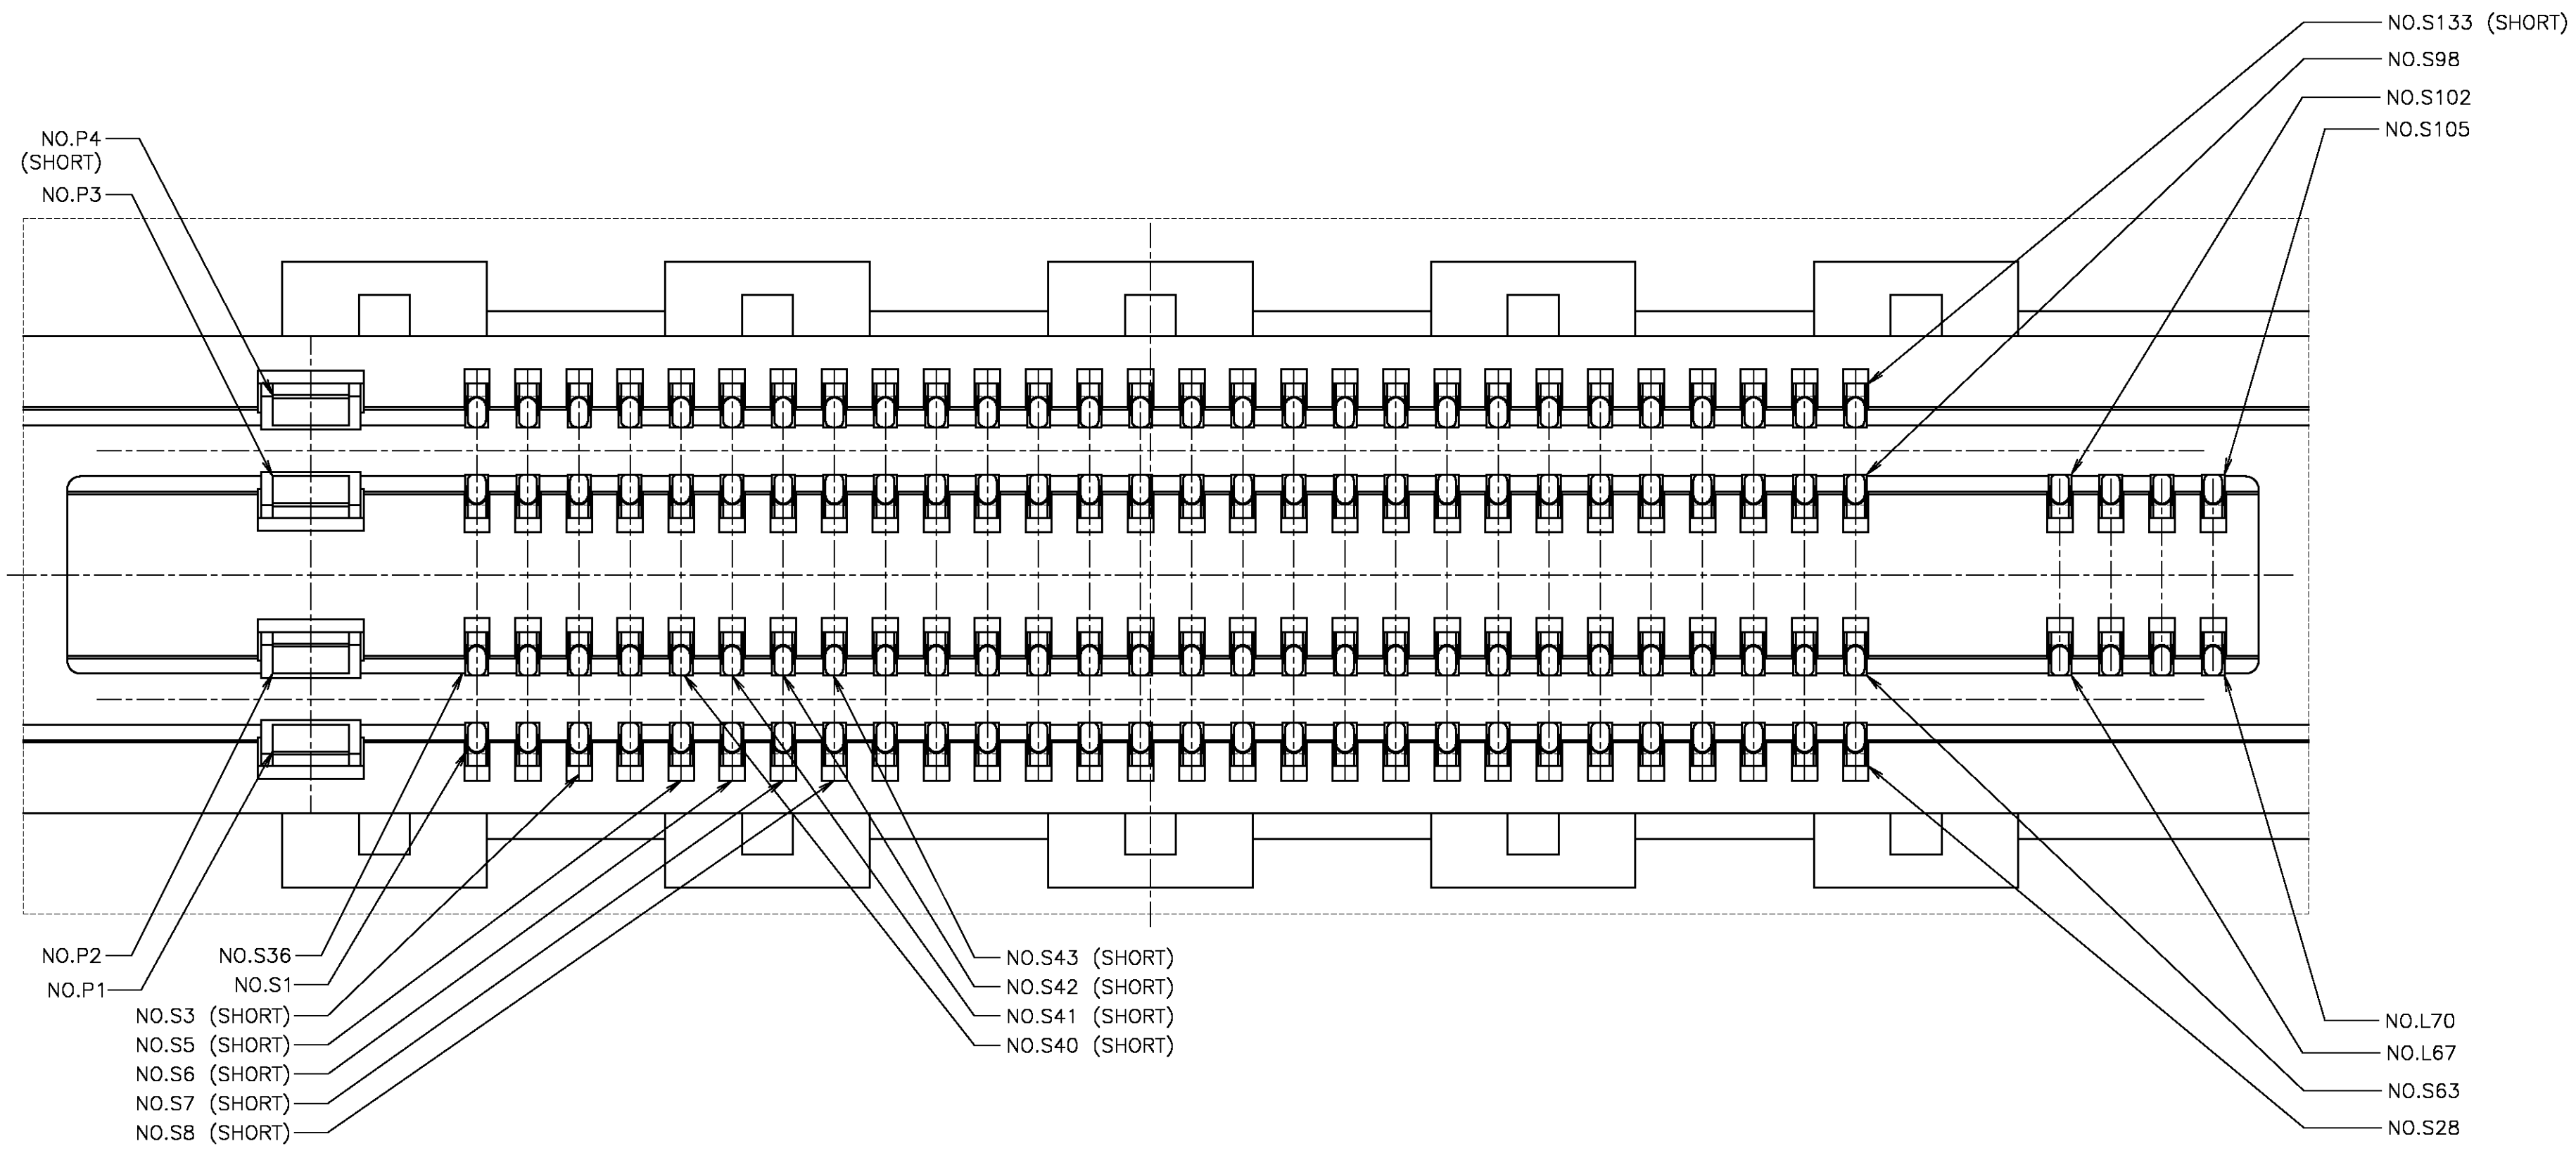

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
単位: 寸
mm

0 PLC
1 PLC
2 PLC
3 PLC
4 PLC

ANGLES
FINISH
仕上

TOLERANCES, UNLESS OTHERWISE SPECIFIED:
一般公差

±
±
±
±
±
±

FINISH
仕上

±

DWN
CHK
APVD

PRODUCT SPEC
製品規格
APPLICATION SPEC
取付適用規格

WEIGHT

CUSTOMER DRAWING

Tyco Electronics
Tyco Electronics Corporation
Kawasaki, Japan

NAME
名称
0.8 DOCKING CONNECTOR
REC ASSY, 140P + POWER 4P

SIZE
A2
CAGE CODE
00779
DRAWING NO
番号
C=1903385
RESTRICTED TO
A1

SCALE
尺度
12:1
SHEET
3 OF 5
REV
A1


AMP 1471-9 REV 31MAR2000

D


C

B

A

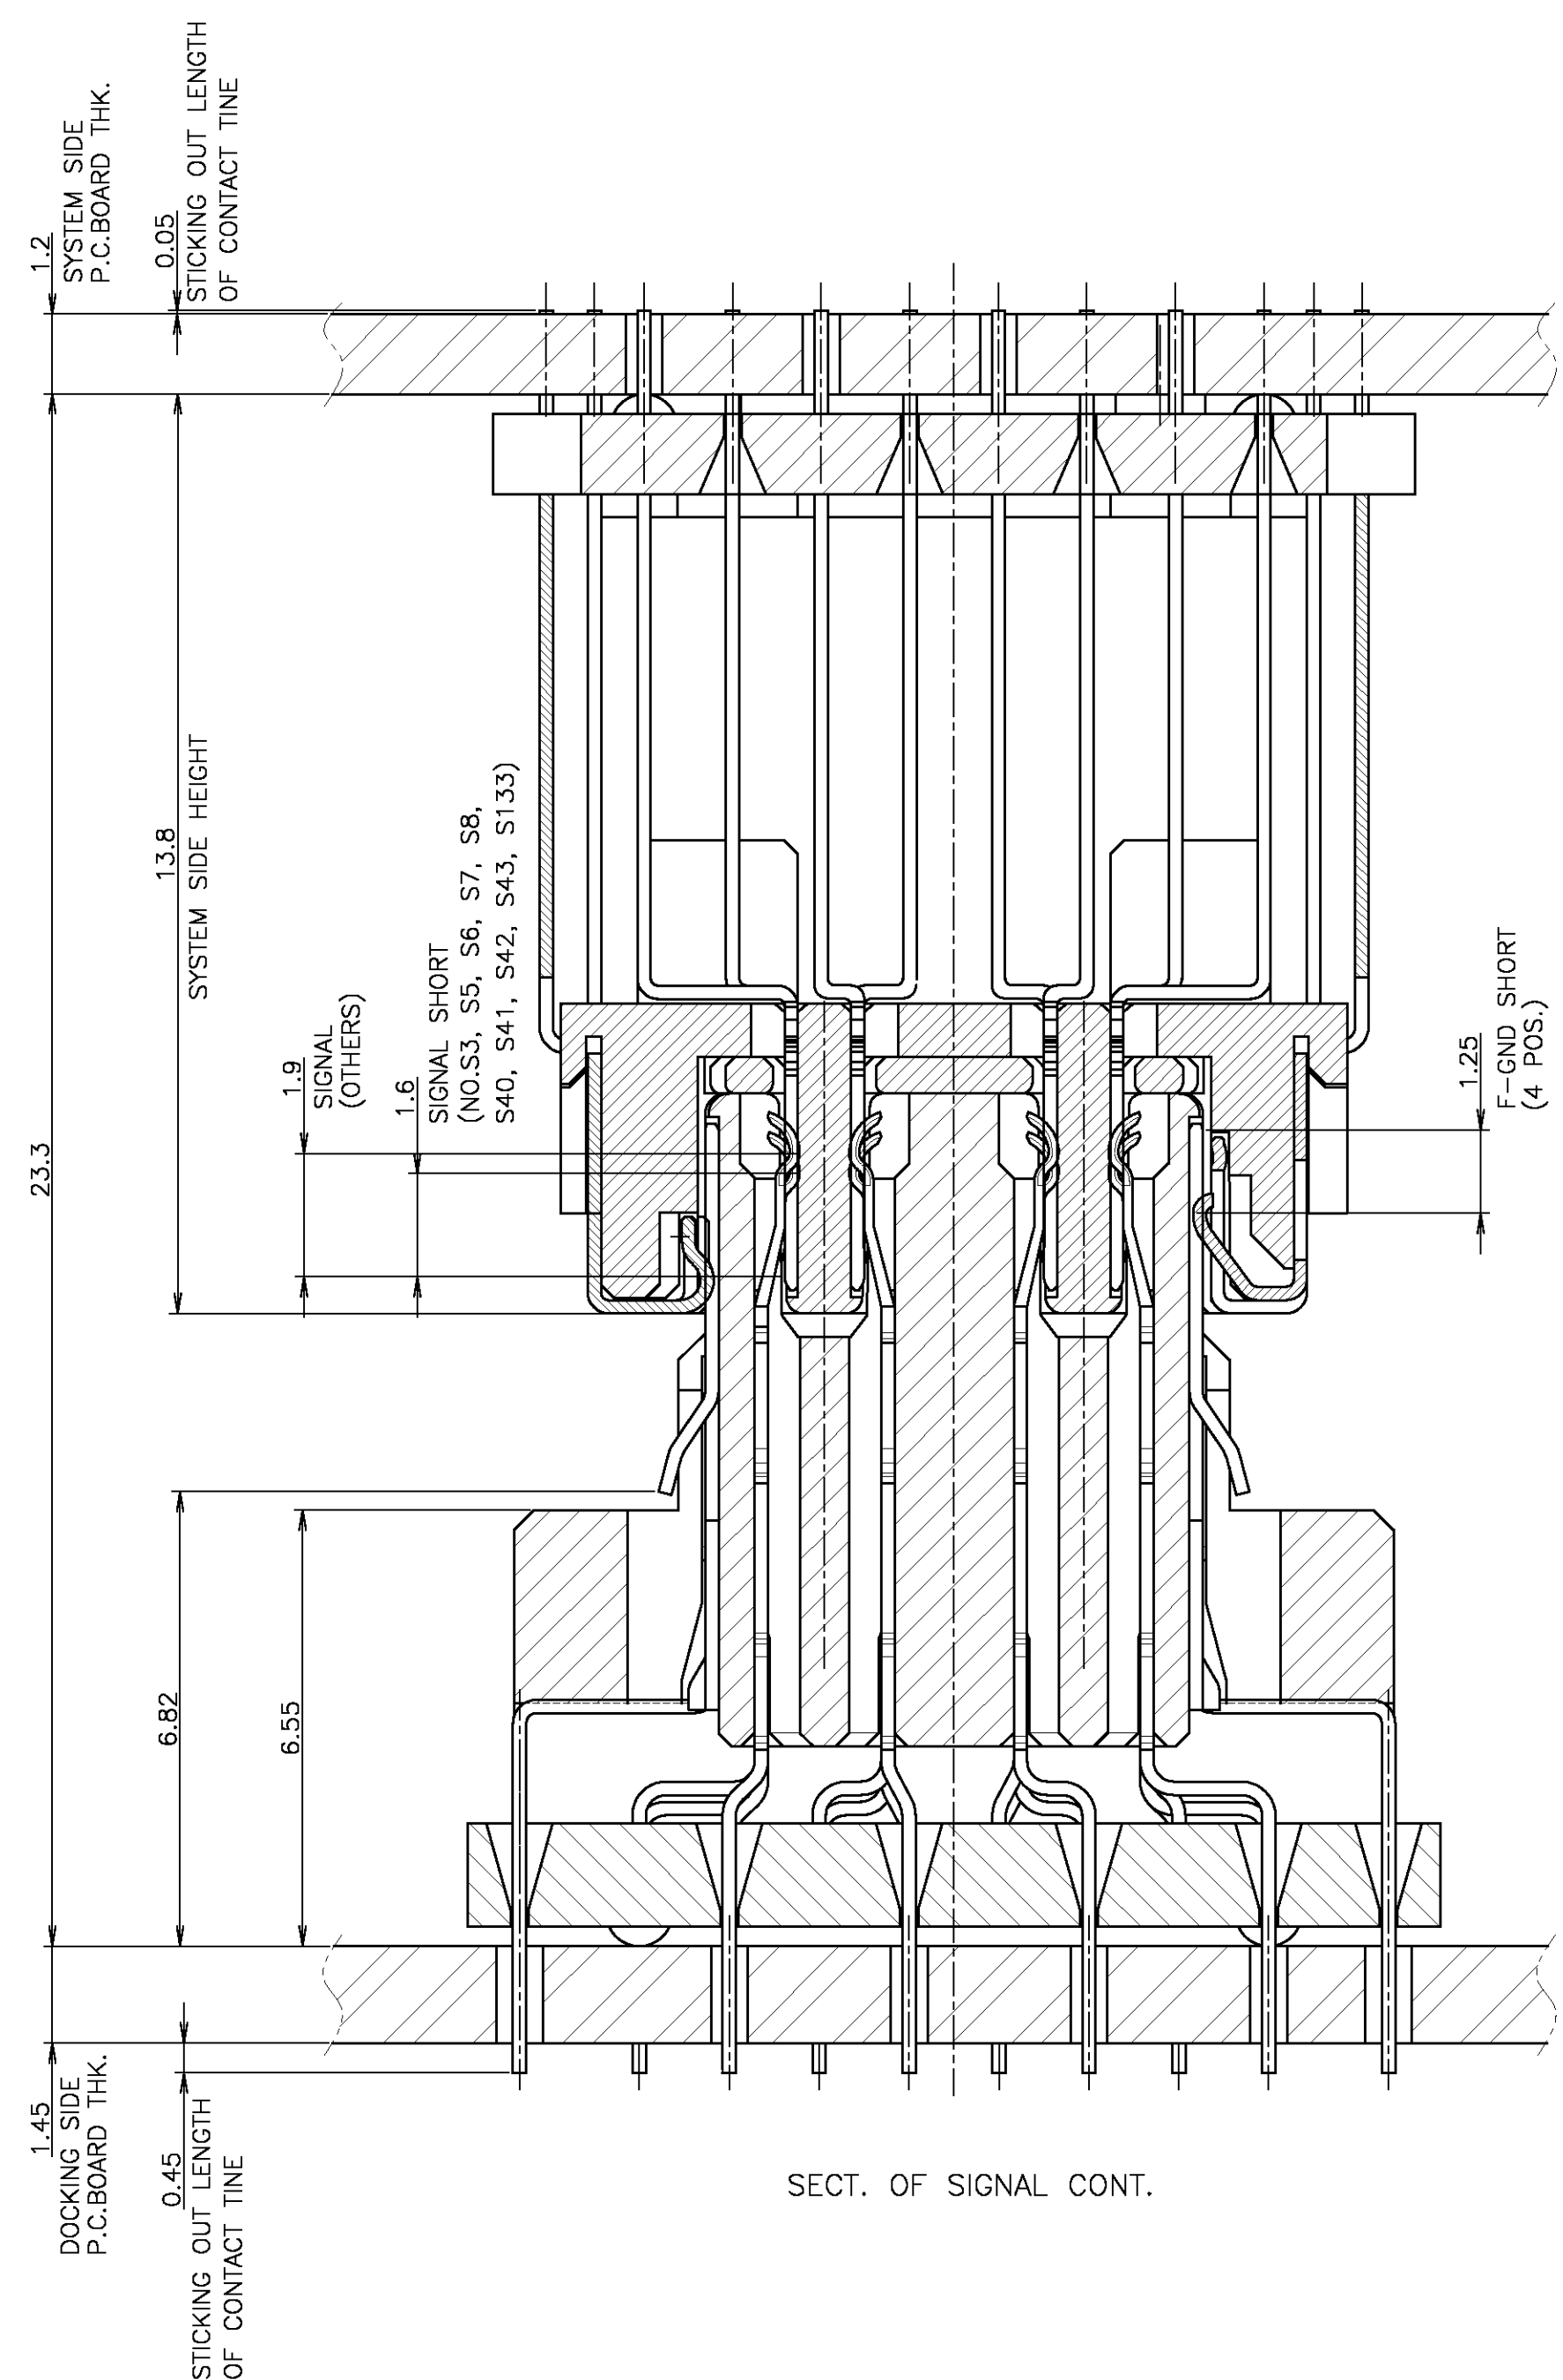

DIMENSIONS ARE REFERENCE ONLY.

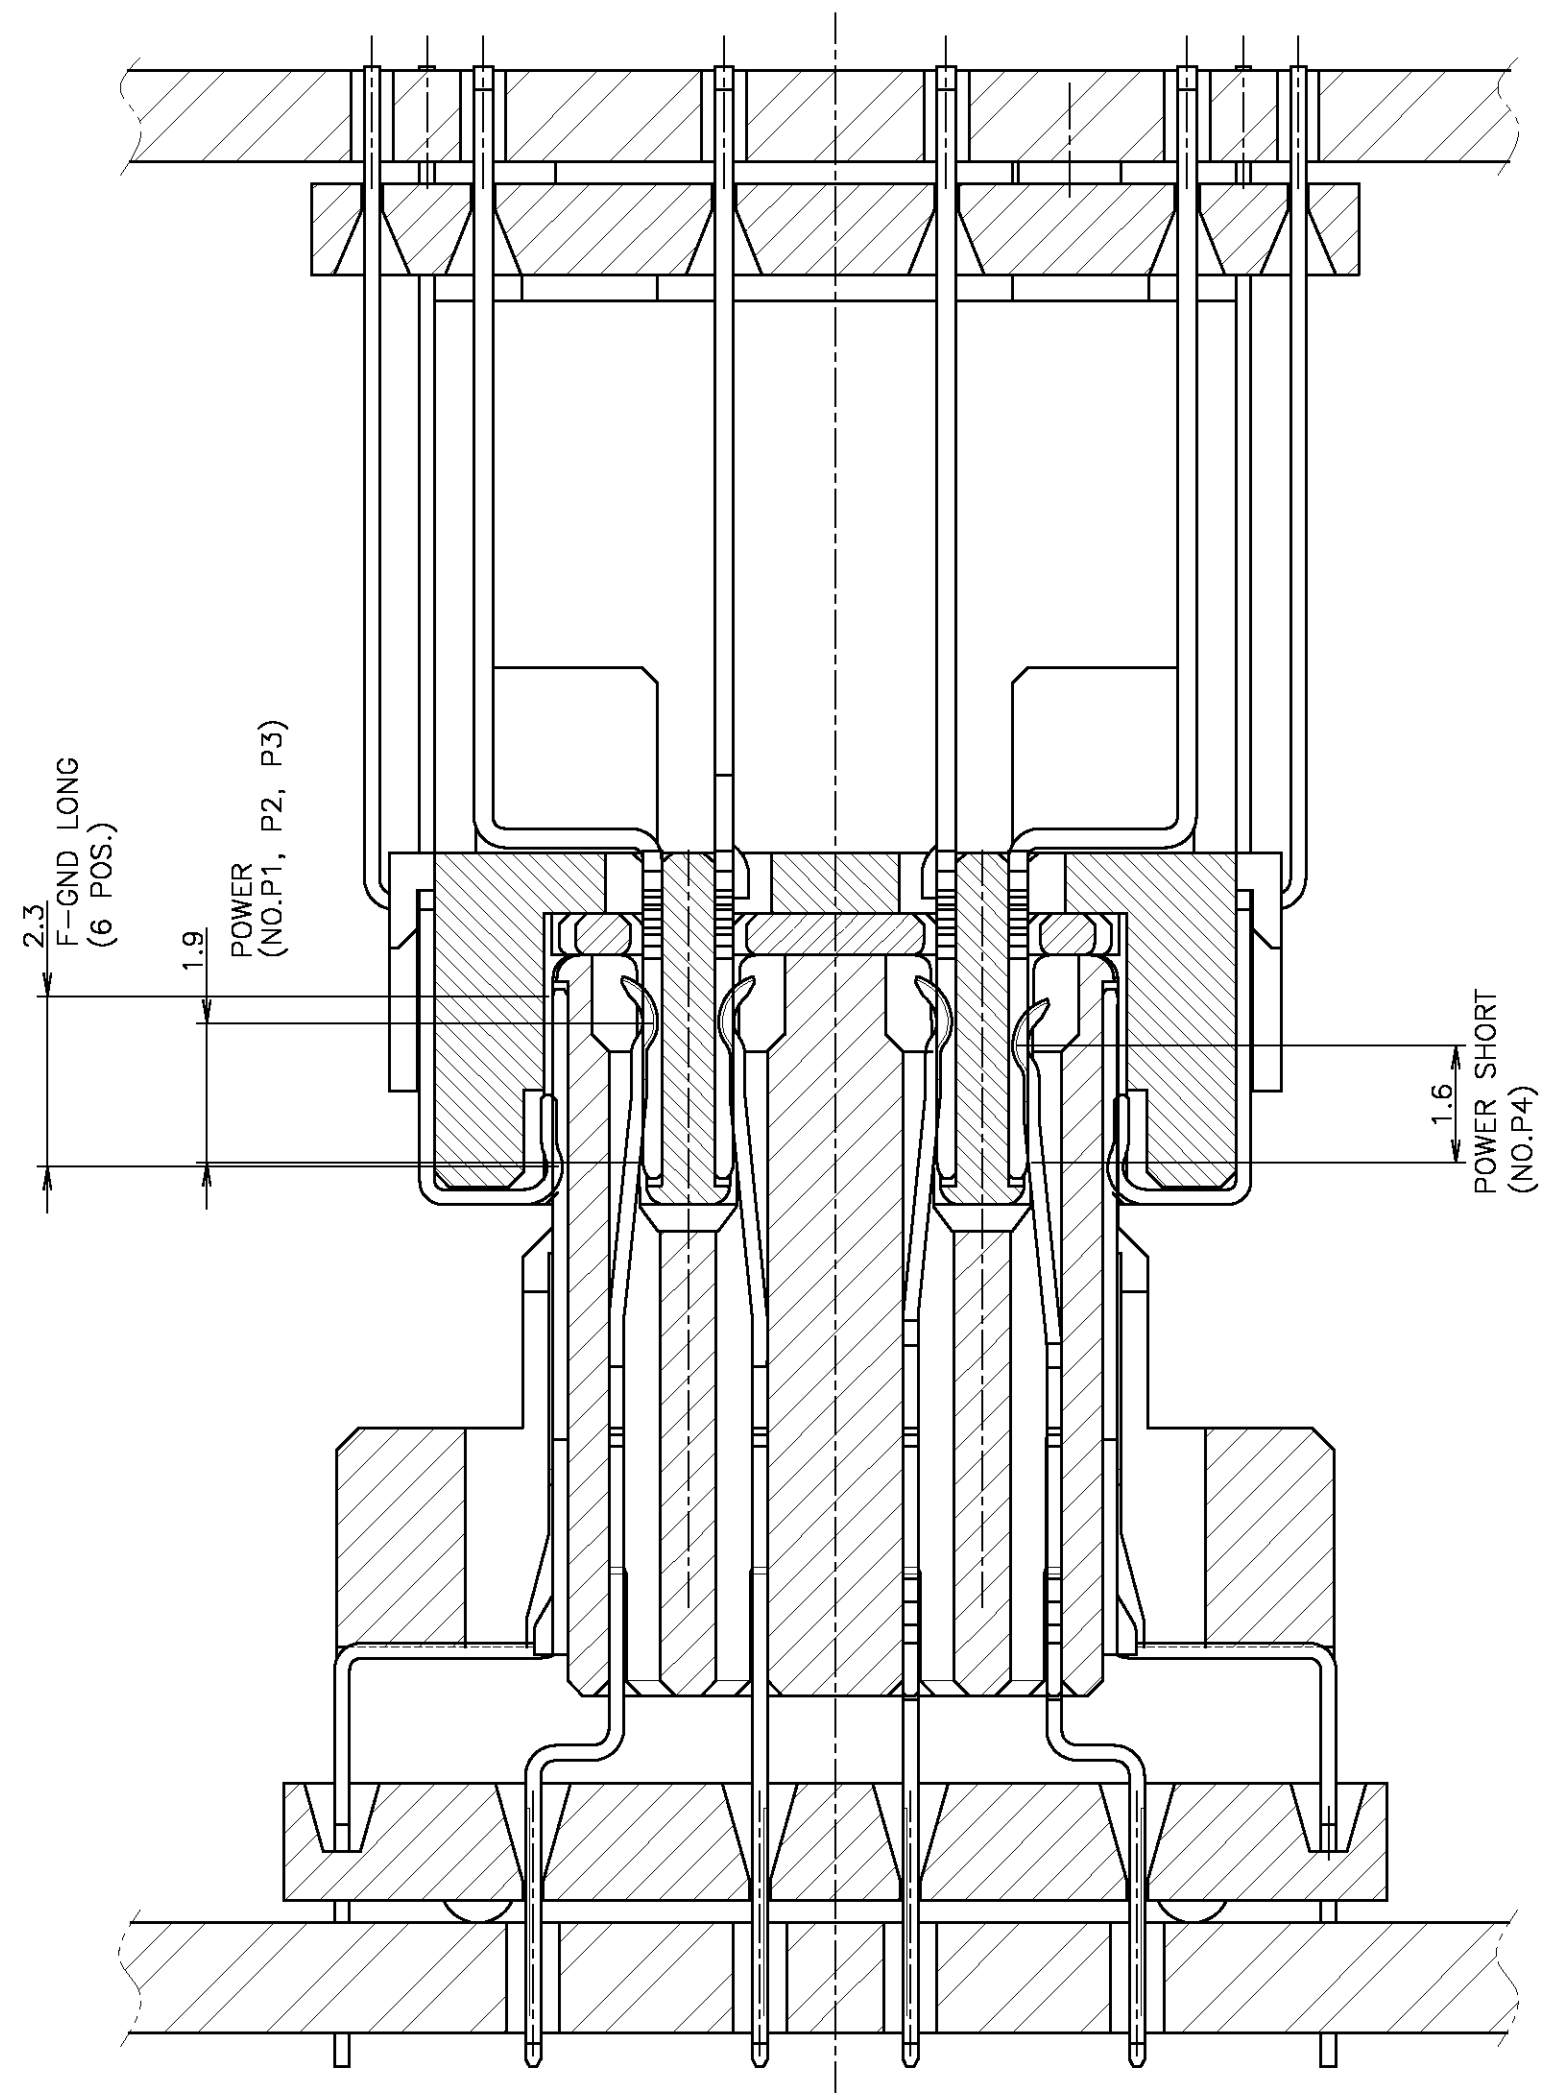

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	Tyco Electronics Tyco Electronics Corporation Kawasaki, Japan	
DIMENSIONS: 単位: 特 mm		CHK	NAME 名称	
TOLERANCES, UNLESS OTHERWISE SPECIFIED: 一般公差		APVD	0.8 DOCKING CONNECTOR REC ASSY, 140P + POWER 4P	
6 PLG ± 1 PLG ± 2 PLG ± 3 PLG ± 4 PLG ± ANGLES ±		PRODUCT SPEC 製品規格	SIZE A2	CAGE CODE 00779
MATERIAL 材料		APPLICATION SPEC 取付適用規格	DRAWING NO 番号 C=1903385	RESTRICTED TO
FINISH 仕上		WEIGHT	SCALE 尺度 NTS	
CUSTOMER DRAWING		SHEET 4 OF 5 REV A1		





D

C

B

A

1903385

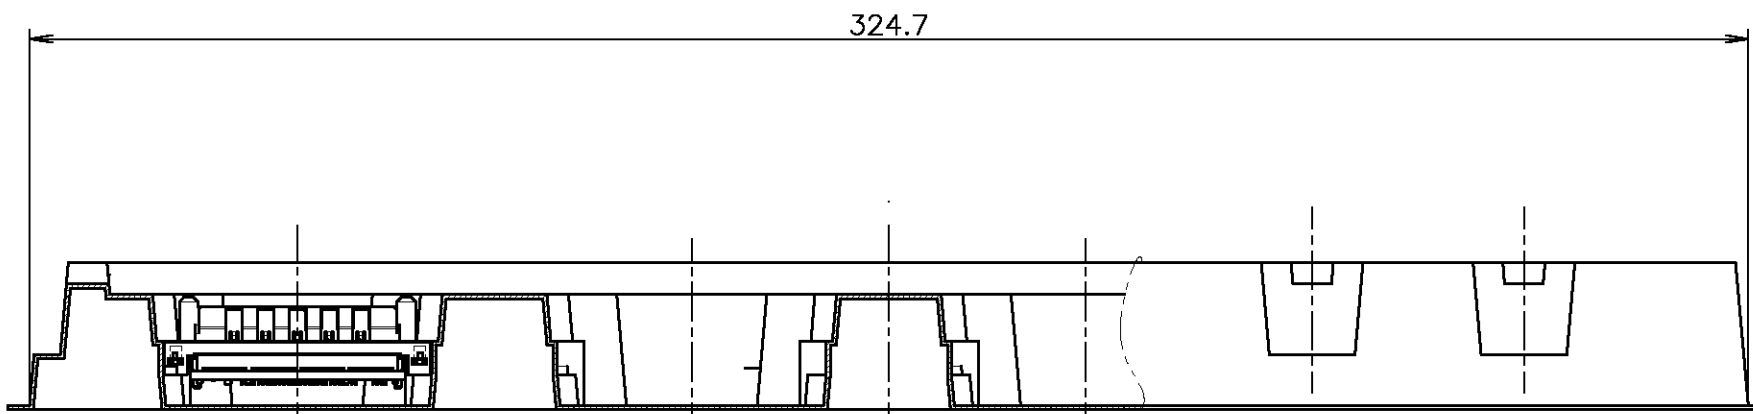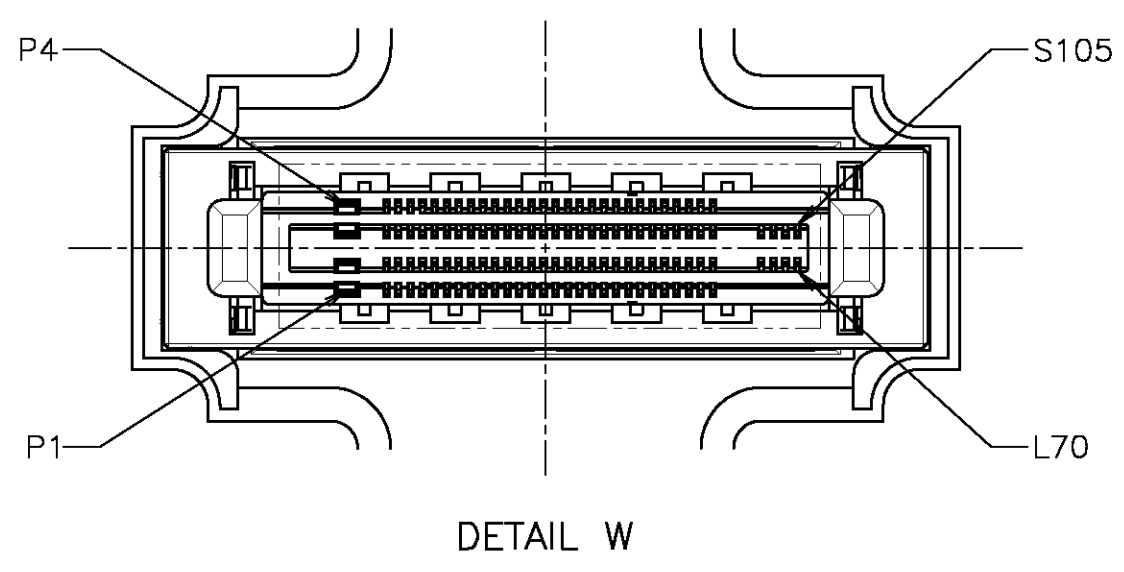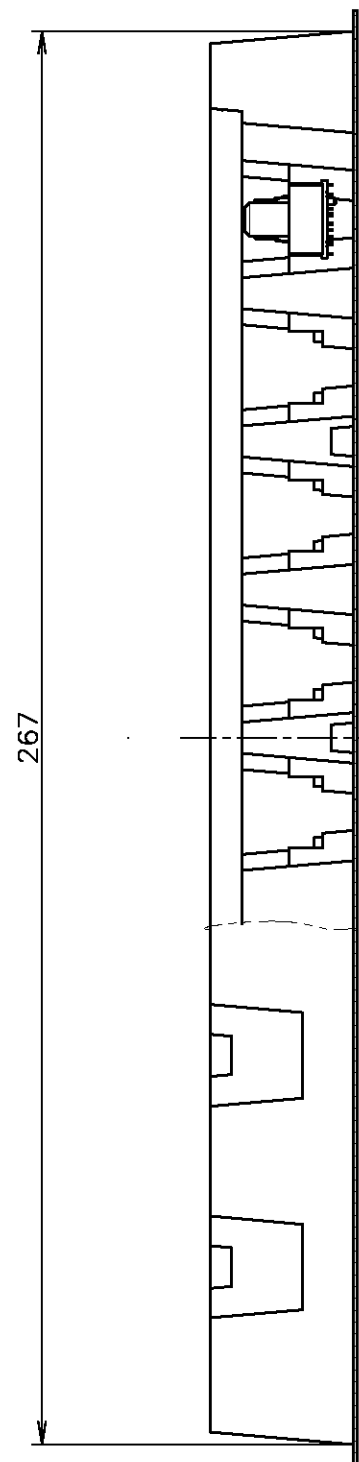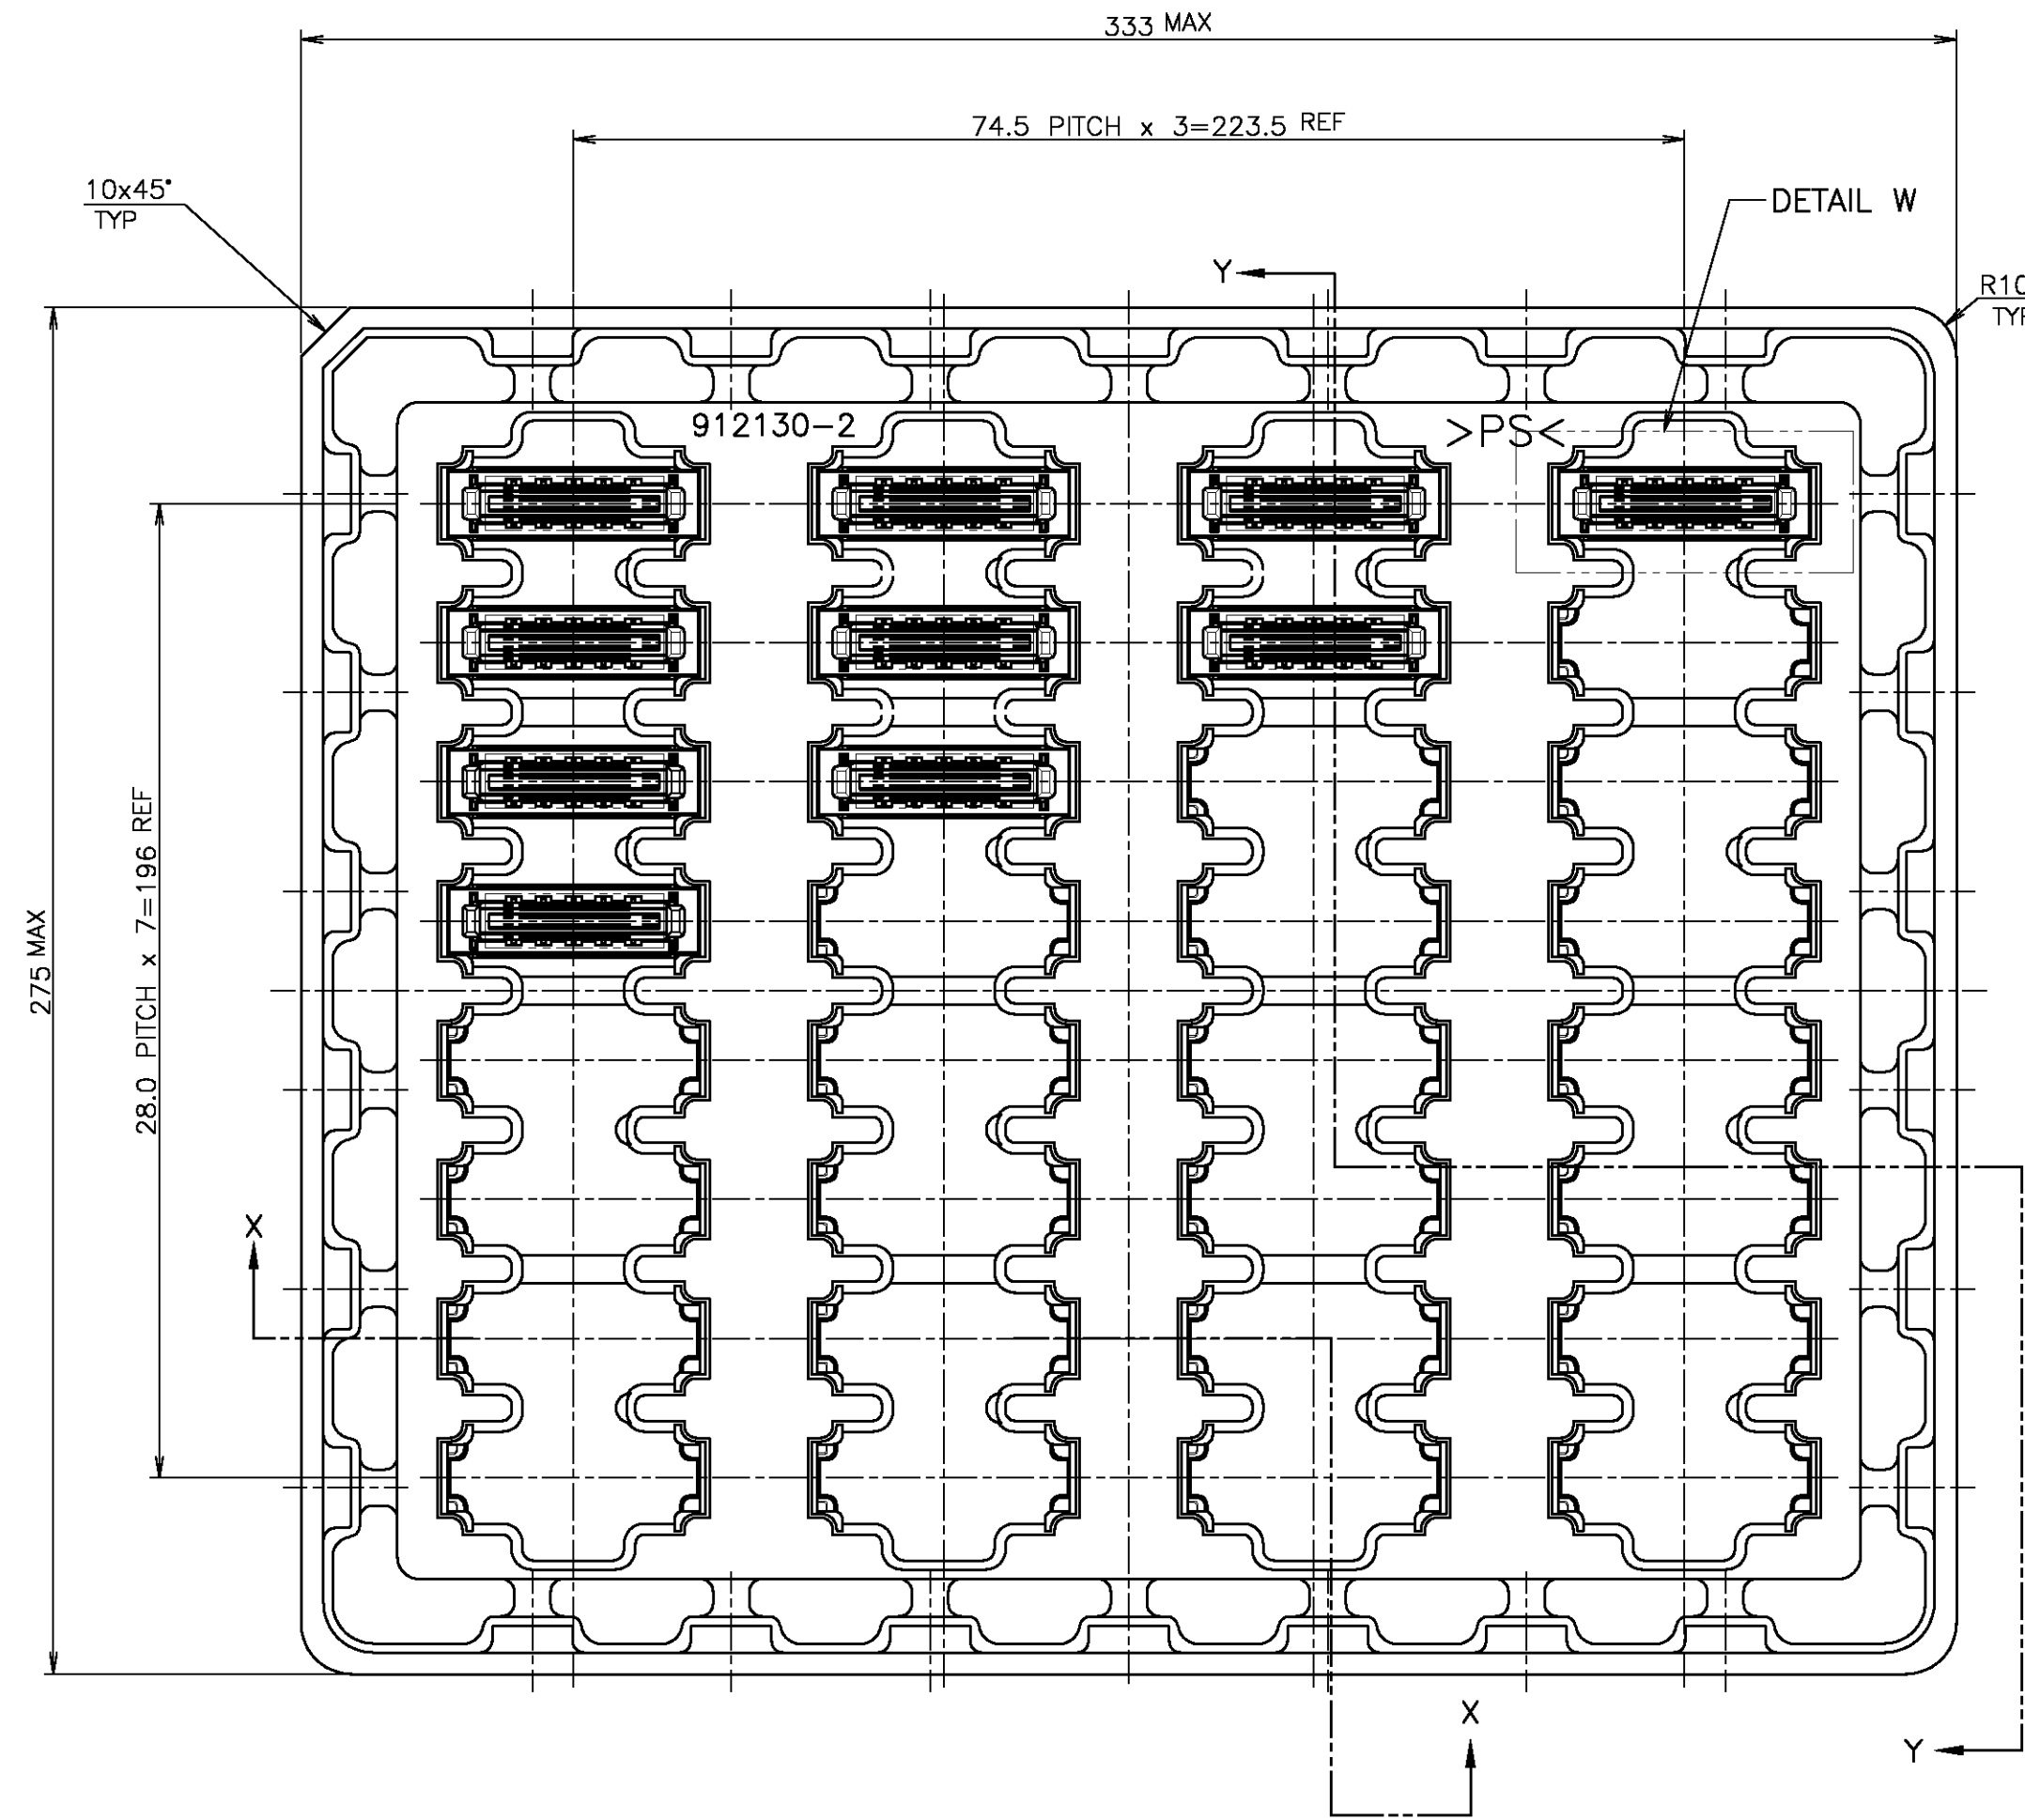

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
単位: 特
mm

0 PLG

1 PLG

2 PLG

3 PLG

4 PLG

±

±

±

±

±

±1.0mm

MATERIAL
材料

FINISH
仕上

ANGLES

DWN

CHK

APVD

PRODUCT SPEC
製品規格

APPLICATION SPEC
取付適用規格

WEIGHT

CUSTOMER DRAWING

Tyco Electronics

Tyco Electronics Corporation
Kawasaki, Japan

NAME
名称

0.8 DOCKING CONNECTOR
REC ASSY, 140P + POWER 4P

SIZE
A2

CAGE CODE
00779

DRAWING NO
番号
C=1903385

RESTRICTED TO

SCALE
尺度
NTS

SHEET
5 of 5

REV
A1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1903385-1](#)