
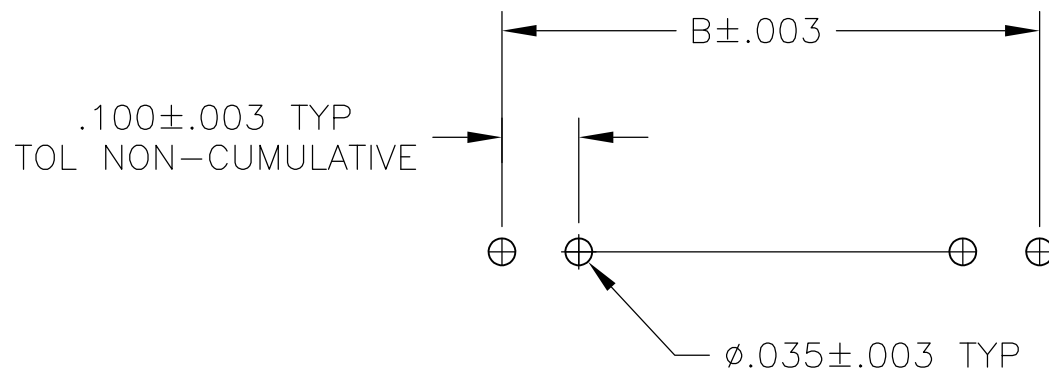
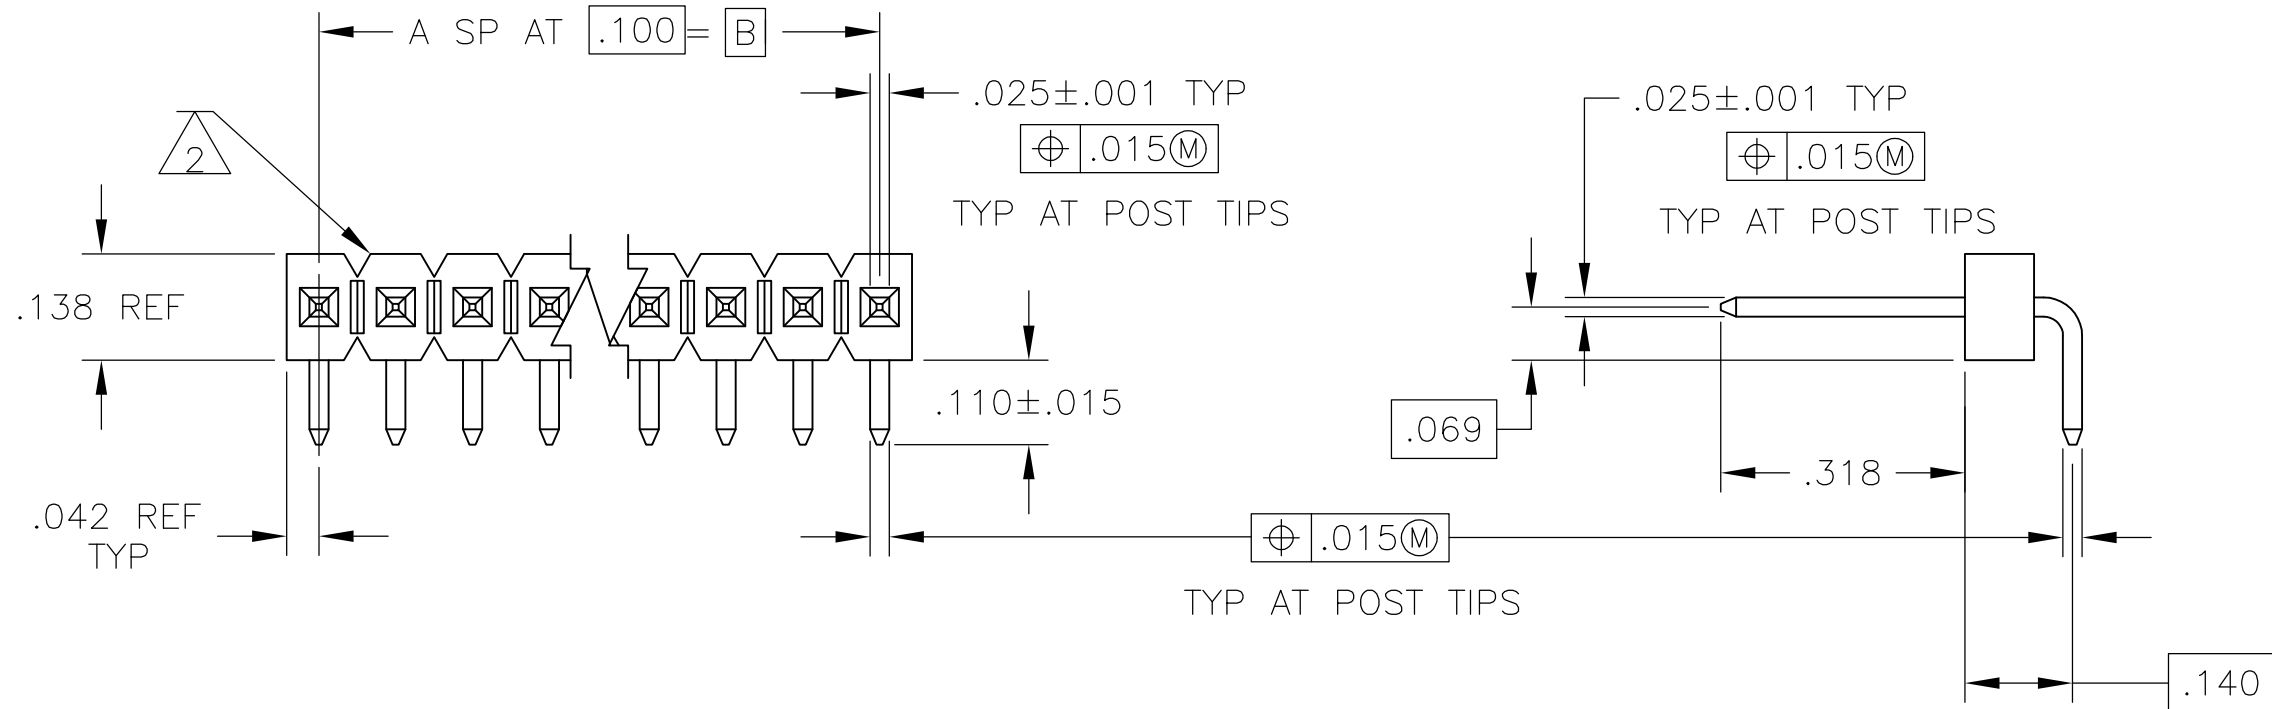


D

C

B

A

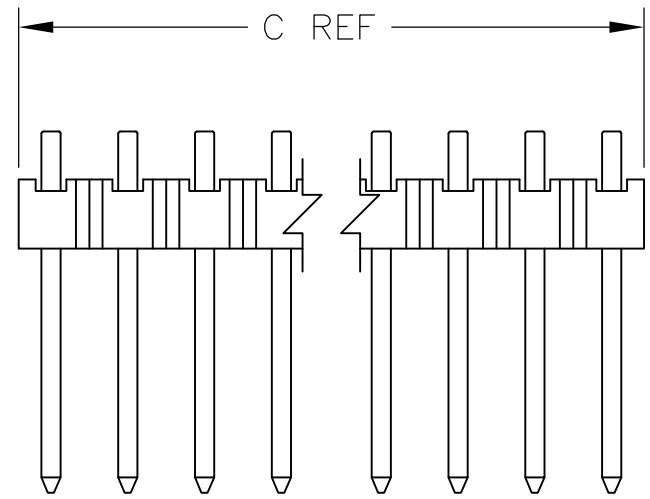

RECOMMENDED HOLE LAYOUT

- 1
- ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS.
- 2
- BREAKAWAY NOTCH ANGLE CAN BE ORIENTED TO THE RIGHT (AS SHOWN) OR TO THE LEFT
- 3
- .000100-.000200 MATTE TIN-LEAD OVER .000050 NICKEL.
- 4
- .000100-.000200 BRIGHT TIN OVER .000050 NICKEL.
- 5
- PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
- 6
- HOUSING MATERIAL: FLAME RETARDANT THERMOPLASTIC; COLOR-BLACK.  
POSTS: COPPER ALLOY
- 7
- .000100-.000200 MATTE TIN OVER .000050 NICKEL.
- 8
- OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

|          |   |       |       |            |             |                       |
|----------|---|-------|-------|------------|-------------|-----------------------|
|          |   | 3.984 | 3.900 | 39         | 40          | 9-103323-0            |
| OBSOLETE |   | 3.884 | 3.800 | 38         | 39          | <del>8-103328-9</del> |
| OBSOLETE |   | 3.784 | 3.700 | 37         | 38          | <del>8-103328-8</del> |
| OBSOLETE |   | 3.684 | 3.600 | 36         | 37          | <del>8-103328-7</del> |
|          |   | 3.584 | 3.500 | 35         | 36          | 8-103328-6            |
| OBSOLETE |   | 3.484 | 3.400 | 34         | 35          | <del>8-103328-5</del> |
| OBSOLETE |   | 3.384 | 3.300 | 33         | 34          | <del>8-103328-4</del> |
| OBSOLETE |   | 3.284 | 3.200 | 32         | 33          | <del>8-103328-3</del> |
| OBSOLETE |   | 3.184 | 3.100 | 31         | 32          | <del>8-103328-2</del> |
| OBSOLETE |   | 3.084 | 3.000 | 30         | 31          | <del>8-103328-1</del> |
| OBSOLETE |   | 2.984 | 2.900 | 29         | 30          | <del>8-103328-0</del> |
| OBSOLETE |   | 2.884 | 2.800 | 28         | 29          | <del>7-103323-9</del> |
| OBSOLETE |   | 2.784 | 2.700 | 27         | 28          | <del>7-103323-8</del> |
| OBSOLETE |   | 2.684 | 2.600 | 26         | 27          | <del>7-103323-7</del> |
| OBSOLETE |   | 2.584 | 2.500 | 25         | 26          | <del>7-103323-6</del> |
| OBSOLETE |   | 2.484 | 2.400 | 24         | 25          | <del>7-103323-5</del> |
| OBSOLETE |   | 2.384 | 2.300 | 23         | 24          | <del>7-103323-4</del> |
| OBSOLETE |   | 2.284 | 2.200 | 22         | 23          | <del>7-103323-3</del> |
| OBSOLETE |   | 2.184 | 2.100 | 21         | 22          | <del>7-103323-2</del> |
| OBSOLETE |   | 2.084 | 2.000 | 20         | 21          | <del>7-103323-1</del> |
|          |   | 1.984 | 1.900 | 19         | 20          | 7-103323-0            |
| OBSOLETE |   | 1.884 | 1.800 | 18         | 19          | <del>6-103323-9</del> |
| OBSOLETE |   | 1.784 | 1.700 | 17         | 18          | <del>6-103323-8</del> |
| OBSOLETE |   | 1.684 | 1.600 | 16         | 17          | <del>6-103323-7</del> |
| OBSOLETE |   | 1.584 | 1.500 | 15         | 16          | <del>6-103323-6</del> |
| OBSOLETE |   | 1.484 | 1.400 | 14         | 15          | <del>6-103323-5</del> |
| OBSOLETE |   | 1.384 | 1.300 | 13         | 14          | <del>6-103323-4</del> |
| OBSOLETE |   | 1.284 | 1.200 | 12         | 13          | <del>6-103323-3</del> |
| OBSOLETE |   | 1.184 | 1.100 | 11         | 12          | <del>6-103323-2</del> |
| OBSOLETE |   | 1.084 | 1.000 | 10         | 11          | <del>6-103323-1</del> |
|          |   | .984  | .900  | 9          | 10          | 6-103323-0            |
| OBSOLETE |   | .884  | .800  | 8          | 9           | <del>5-103323-9</del> |
| OBSOLETE |   | .784  | .700  | 7          | 8           | <del>5-103323-8</del> |
| OBSOLETE |   | .684  | .600  | 6          | 7           | <del>5-103323-7</del> |
| OBSOLETE |   | .584  | .500  | 5          | 6           | <del>5-103323-6</del> |
|          |   | .484  | .400  | 4          | 5           | 5-103323-5            |
|          |   | .384  | .300  | 3          | 4           | 5-103323-4            |
| OBSOLETE |   | .284  | .200  | 2          | 3           | <del>5-103323-3</del> |
| OBSOLETE |   | .184  | .100  | 1          | 2           | <del>5-103323-2</del> |
| OBSOLETE |   | .084  | —     | —          | 1           | <del>5-103323-1</del> |
| PLATING  | C | B     | A     | NO OF POSN | PART NUMBER |                       |

|         |   |       |       |            |             |                       |
|---------|---|-------|-------|------------|-------------|-----------------------|
|         |   | .184  | .100  | 1          | 2           | 4-103323-2            |
|         |   | 3.984 | 3.900 | 39         | 40          | 4-103323-1            |
|         |   | 3.984 | 3.900 | 39         | 40          | 4-103323-0            |
|         |   | 3.884 | 3.800 | 38         | 39          | <del>3-103323-9</del> |
|         |   | 3.784 | 3.700 | 37         | 38          | <del>3-103323-8</del> |
|         |   | 3.684 | 3.600 | 36         | 37          | <del>3-103323-7</del> |
|         |   | 3.584 | 3.500 | 35         | 36          | <del>3-103323-6</del> |
|         |   | 3.484 | 3.400 | 34         | 35          | <del>3-103323-5</del> |
|         |   | 3.384 | 3.300 | 33         | 34          | <del>3-103323-4</del> |
|         |   | 3.284 | 3.200 | 32         | 33          | <del>3-103323-3</del> |
|         |   | 3.184 | 3.100 | 31         | 32          | <del>3-103323-2</del> |
|         |   | 3.084 | 3.000 | 30         | 31          | <del>3-103323-1</del> |
|         |   | 2.984 | 2.900 | 29         | 30          | <del>3-103323-0</del> |
|         |   | 2.884 | 2.800 | 28         | 29          | <del>2-103323-9</del> |
|         |   | 2.784 | 2.700 | 27         | 28          | <del>2-103323-8</del> |
|         |   | 2.684 | 2.600 | 26         | 27          | <del>2-103323-7</del> |
|         |   | 2.584 | 2.500 | 25         | 26          | <del>2-103323-6</del> |
|         |   | 2.484 | 2.400 | 24         | 25          | <del>2-103323-5</del> |
|         |   | 2.384 | 2.300 | 23         | 24          | <del>2-103323-4</del> |
|         |   | 2.284 | 2.200 | 22         | 23          | <del>2-103323-3</del> |
|         |   | 2.184 | 2.100 | 21         | 22          | <del>2-103323-2</del> |
|         |   | 2.084 | 2.000 | 20         | 21          | <del>2-103323-1</del> |
|         |   | 1.984 | 1.900 | 19         | 20          | 2-103323-0            |
|         |   | 1.884 | 1.800 | 18         | 19          | <del>1-103323-9</del> |
|         |   | 1.784 | 1.700 | 17         | 18          | <del>1-103323-8</del> |
|         |   | 1.684 | 1.600 | 16         | 17          | <del>1-103323-7</del> |
|         |   | 1.584 | 1.500 | 15         | 16          | 1-103323-6            |
|         |   | 1.484 | 1.400 | 14         | 15          | <del>1-103323-5</del> |
|         |   | 1.384 | 1.300 | 13         | 14          | <del>1-103323-4</del> |
|         |   | 1.284 | 1.200 | 12         | 13          | <del>1-103323-3</del> |
|         |   | 1.184 | 1.100 | 11         | 12          | <del>1-103323-2</del> |
|         |   | 1.084 | 1.000 | 10         | 11          | <del>1-103323-1</del> |
|         |   | .984  | .900  | 9          | 10          | 1-103323-0            |
|         |   | .884  | .800  | 8          | 9           | 103323-9              |
|         |   | .784  | .700  | 7          | 8           | <del>103323-8</del>   |
|         |   | .684  | .600  | 6          | 7           | 103323-7              |
|         |   | .584  | .500  | 5          | 6           | 103323-6              |
|         |   | .484  | .400  | 4          | 5           | <del>103323-5</del>   |
|         |   | .384  | .300  | 3          | 4           | <del>103323-4</del>   |
|         |   | .284  | .200  | 2          | 3           | 103323-3              |
|         |   | .184  | .100  | 1          | 2           | 103323-2              |
|         |   | .084  | —     | —          | 1           | <del>103323-1</del>   |
| PLATING | C | B     | A     | NO OF POSN | PART NUMBER |                       |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[103323-7](#)