



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

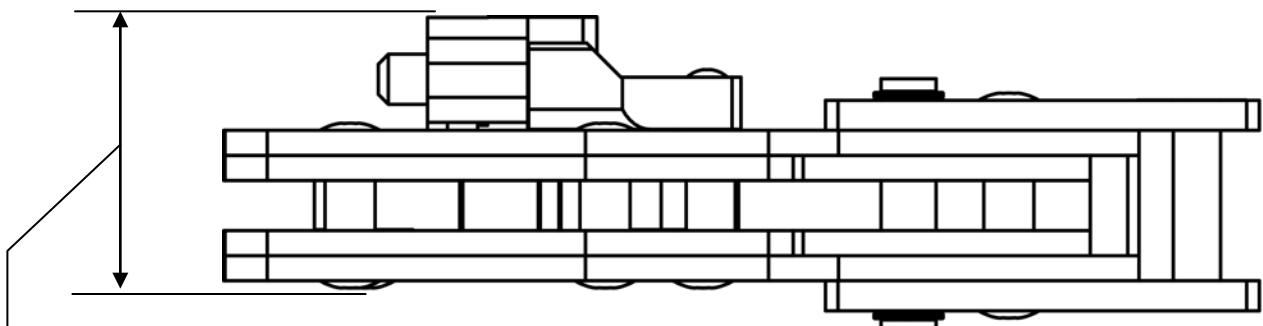

1.44" [37] CT-2525CH, CT-2550CH & CT-2500CH (WITH LOCATOR)

1.25" [32] CT-2570CH (WITHOUT LOCATOR)

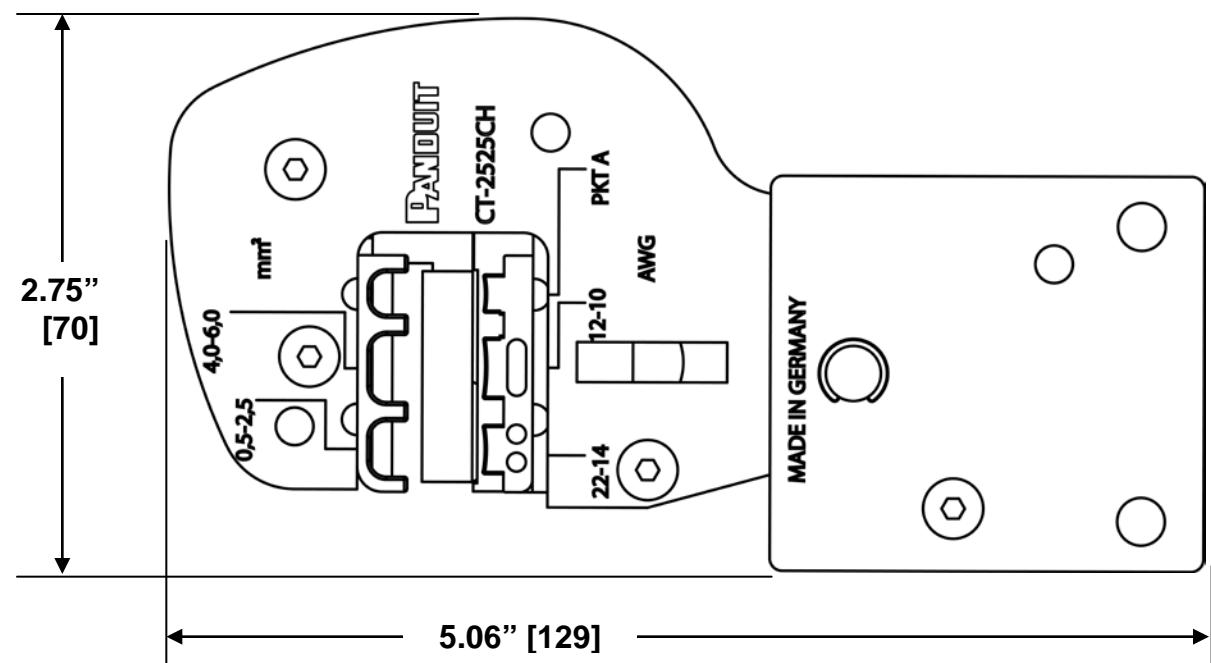

CT-2525CH  
SHOWN ABOVE

**NOTES, UNLESS OTHERWISE SPECIFIED:**

These crimping heads are used with Panduit CT-2500 and CT-2500/E Battery Operated Crimping Tools.

Weight

1.74 lbs. (0,79 kg)

Dimensions:

5-1/16" L x 2-3/4" H x 1-7/16" W (with Locator)  
[129 L x 70 H x 37 W] mm

CT-2525CH or  
CD-525

Crimping head or die insert for installing the following Panduit products:  
#26 – #22 AWG (0,14 – 0,5 mm<sup>2</sup>) insulated terminals and splices,  
#22 – #10 AWG (0,5 – 6,0 mm<sup>2</sup>) fully insulated disconnects, insulated parallel splices; and specific #22 – #14 AWG (0,5 – 2,5 mm<sup>2</sup>) barrel insulated disconnects.

CT-2550CH or  
CD-550

Crimping head or die insert for installing the following Panduit products:  
#22 – #10 AWG (0,5 – 6,0 mm<sup>2</sup>) insulated terminals and splices; and specific insulated disconnects.

CT-2570CH or  
CD-570

Reduced crimp effort advantage for #12 – #10 AWG (4,0 – 6,0 mm<sup>2</sup>) terminations.

CT-2500CH

Crimping head or die insert for installing most of the following Panduit products:

#22 – #10 AWG (0,5 – 6,0 mm<sup>2</sup>) non-insulated terminals, disconnects; and specific non-insulated splices.

CT-2500CH

Crimping head (frame only); to be used with crimping die inserts CD-525, CD-550 or CD-570 (*sold separately*).

The Crimping Head and/or Die Insert Installation Instructions can be found at [www.panduit.com](http://www.panduit.com), search for CT-2525CH, CT-2550CH, CT-2570CH, CT-2500CH, CD-525, CD-550 or CD-570.

Dimensions in [brackets] are in millimeters.  
All dimensions are for reference only.

F:\wrkgrp\rvusers\ENGR DOCS\CUSTOMER DRAWINGS\TP25387B01\_03 CT-25XXCH CD.doc

CD*CT-2525CH, CT-2550CH, CT-2570CH, CT-2500CH									
REV	DATE	BY	CHK'D	DESCRIPTION	ECN	- R	CUST	SUP	UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.x) ± ---      (.xxx) ± --- (.xx) ± ---      ANGLES ± ---
03	5-27-14	BLR	BJPU	ADD MM <sup>2</sup> DIMS TO CT-2525CH / CT-2550CH	4752	---	ABJ		DRAWN BY: BLR
02	1-28-14	BLR	BJPU	UPD BRANDING	4704	---	ABJ		MATL: -----
01	4-04-08	BLR	BJPU	ADD CT-2500CH & DIE INSERTS	4290	---	JRWA		SCALE NONE
00	3-02-07	BLR	SRRE	RELEASED	4241	---	SZ		DRAWING NO. TP25387B01
									DWG B SIZE

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[CT-2550CH](#) [CT-2525CH](#) [CT-2570CH](#)