
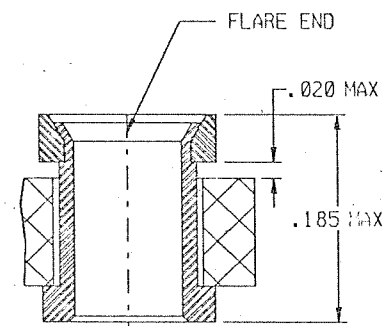
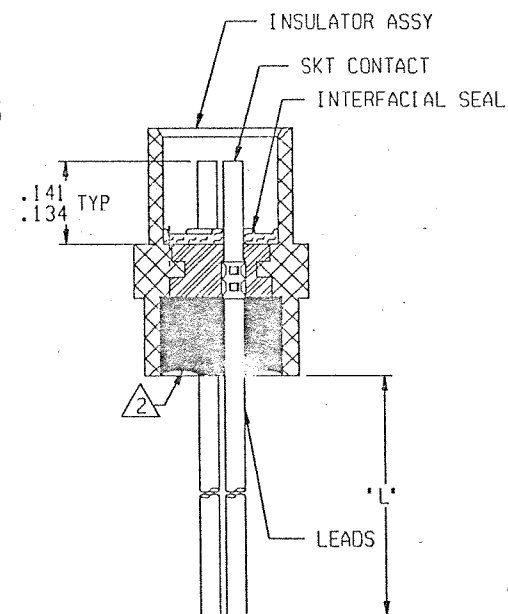
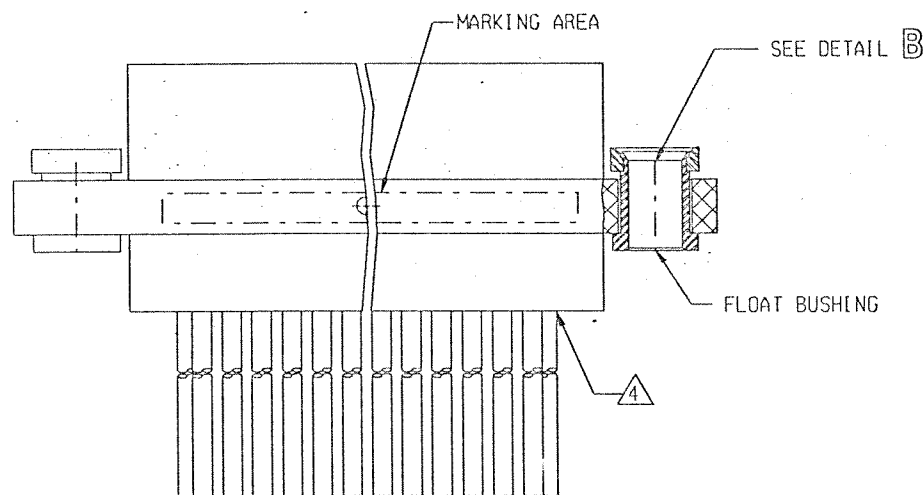


REVISION					
ZONE	LTR	ECN	DESCRIPTION	DATE	APPROVED
	C	38802	GENERAL DWG UPDATE	1/19/99	me

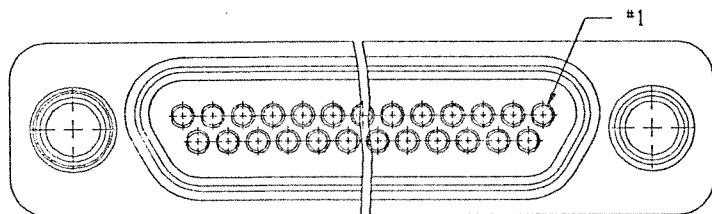

DETAIL B

NOTES: UNLESS OTHERWISE SPECIFIED

1. MARK PER TIS.
2. POTTING COMPOUND USED IS 194-8102-6215/6225.
3. INSTALL FLOAT BUSHING(096-0019-0001) ON CONNECTOR AS SHOWN.
4. EPOXY WICKING: UNINSULATED WIRE : .050 MAX
INSULATED WIRES UP TO #25 AWG : .125 MAX
INSULATED WIRES #24 AWG OR LARGER : .200 MAX
5. CRIMP LEADS INTO CONTACTS PER MEP 302-05.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCE ARE:		APPROVALS		 MICRODOT CONNECTORS A DIVISION OF UNI-STAR INDUSTRIES INC. 306 PASADENA AVE., SO. PASADENA, CA 91030	
FRACTIONS ± 1/8	DECIMALS .XX ± .01 .XXX ± .005	ANGLES ± 2°			
MATERIAL:		SIGNATURE	DATE	METAL SHELL 'D' CONNECTOR MCK---F---S	
		DRAWN BY MEL F. CAMPOS P.E. M.E. D.A.	04/14/99 9/10/99		
FINISH:		THIS DOCUMENT IS THE PROPERTY OF MICRODOT CONNECTORS, A DIVISION OF UNI-STAR INDUSTRIES INC. USE OF THIS DOCUMENT OR ANY PART THEREOF IS STRICTLY FORBIDDEN WITHOUT THE EXPRESS WRITTEN PERMISSION OF MICRODOT CONNECTORS, A DIVISION OF UNI-STAR INDUSTRIES INC.		PROD CODE 845 CODE M	
		SIZE A	CODE IDENT NO. 98278	DRAWING NO. 094-0000-0010	
		SCALE: NONE		SHEET 1 OF 1	

7-1532141-1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-1532007-8](#)