


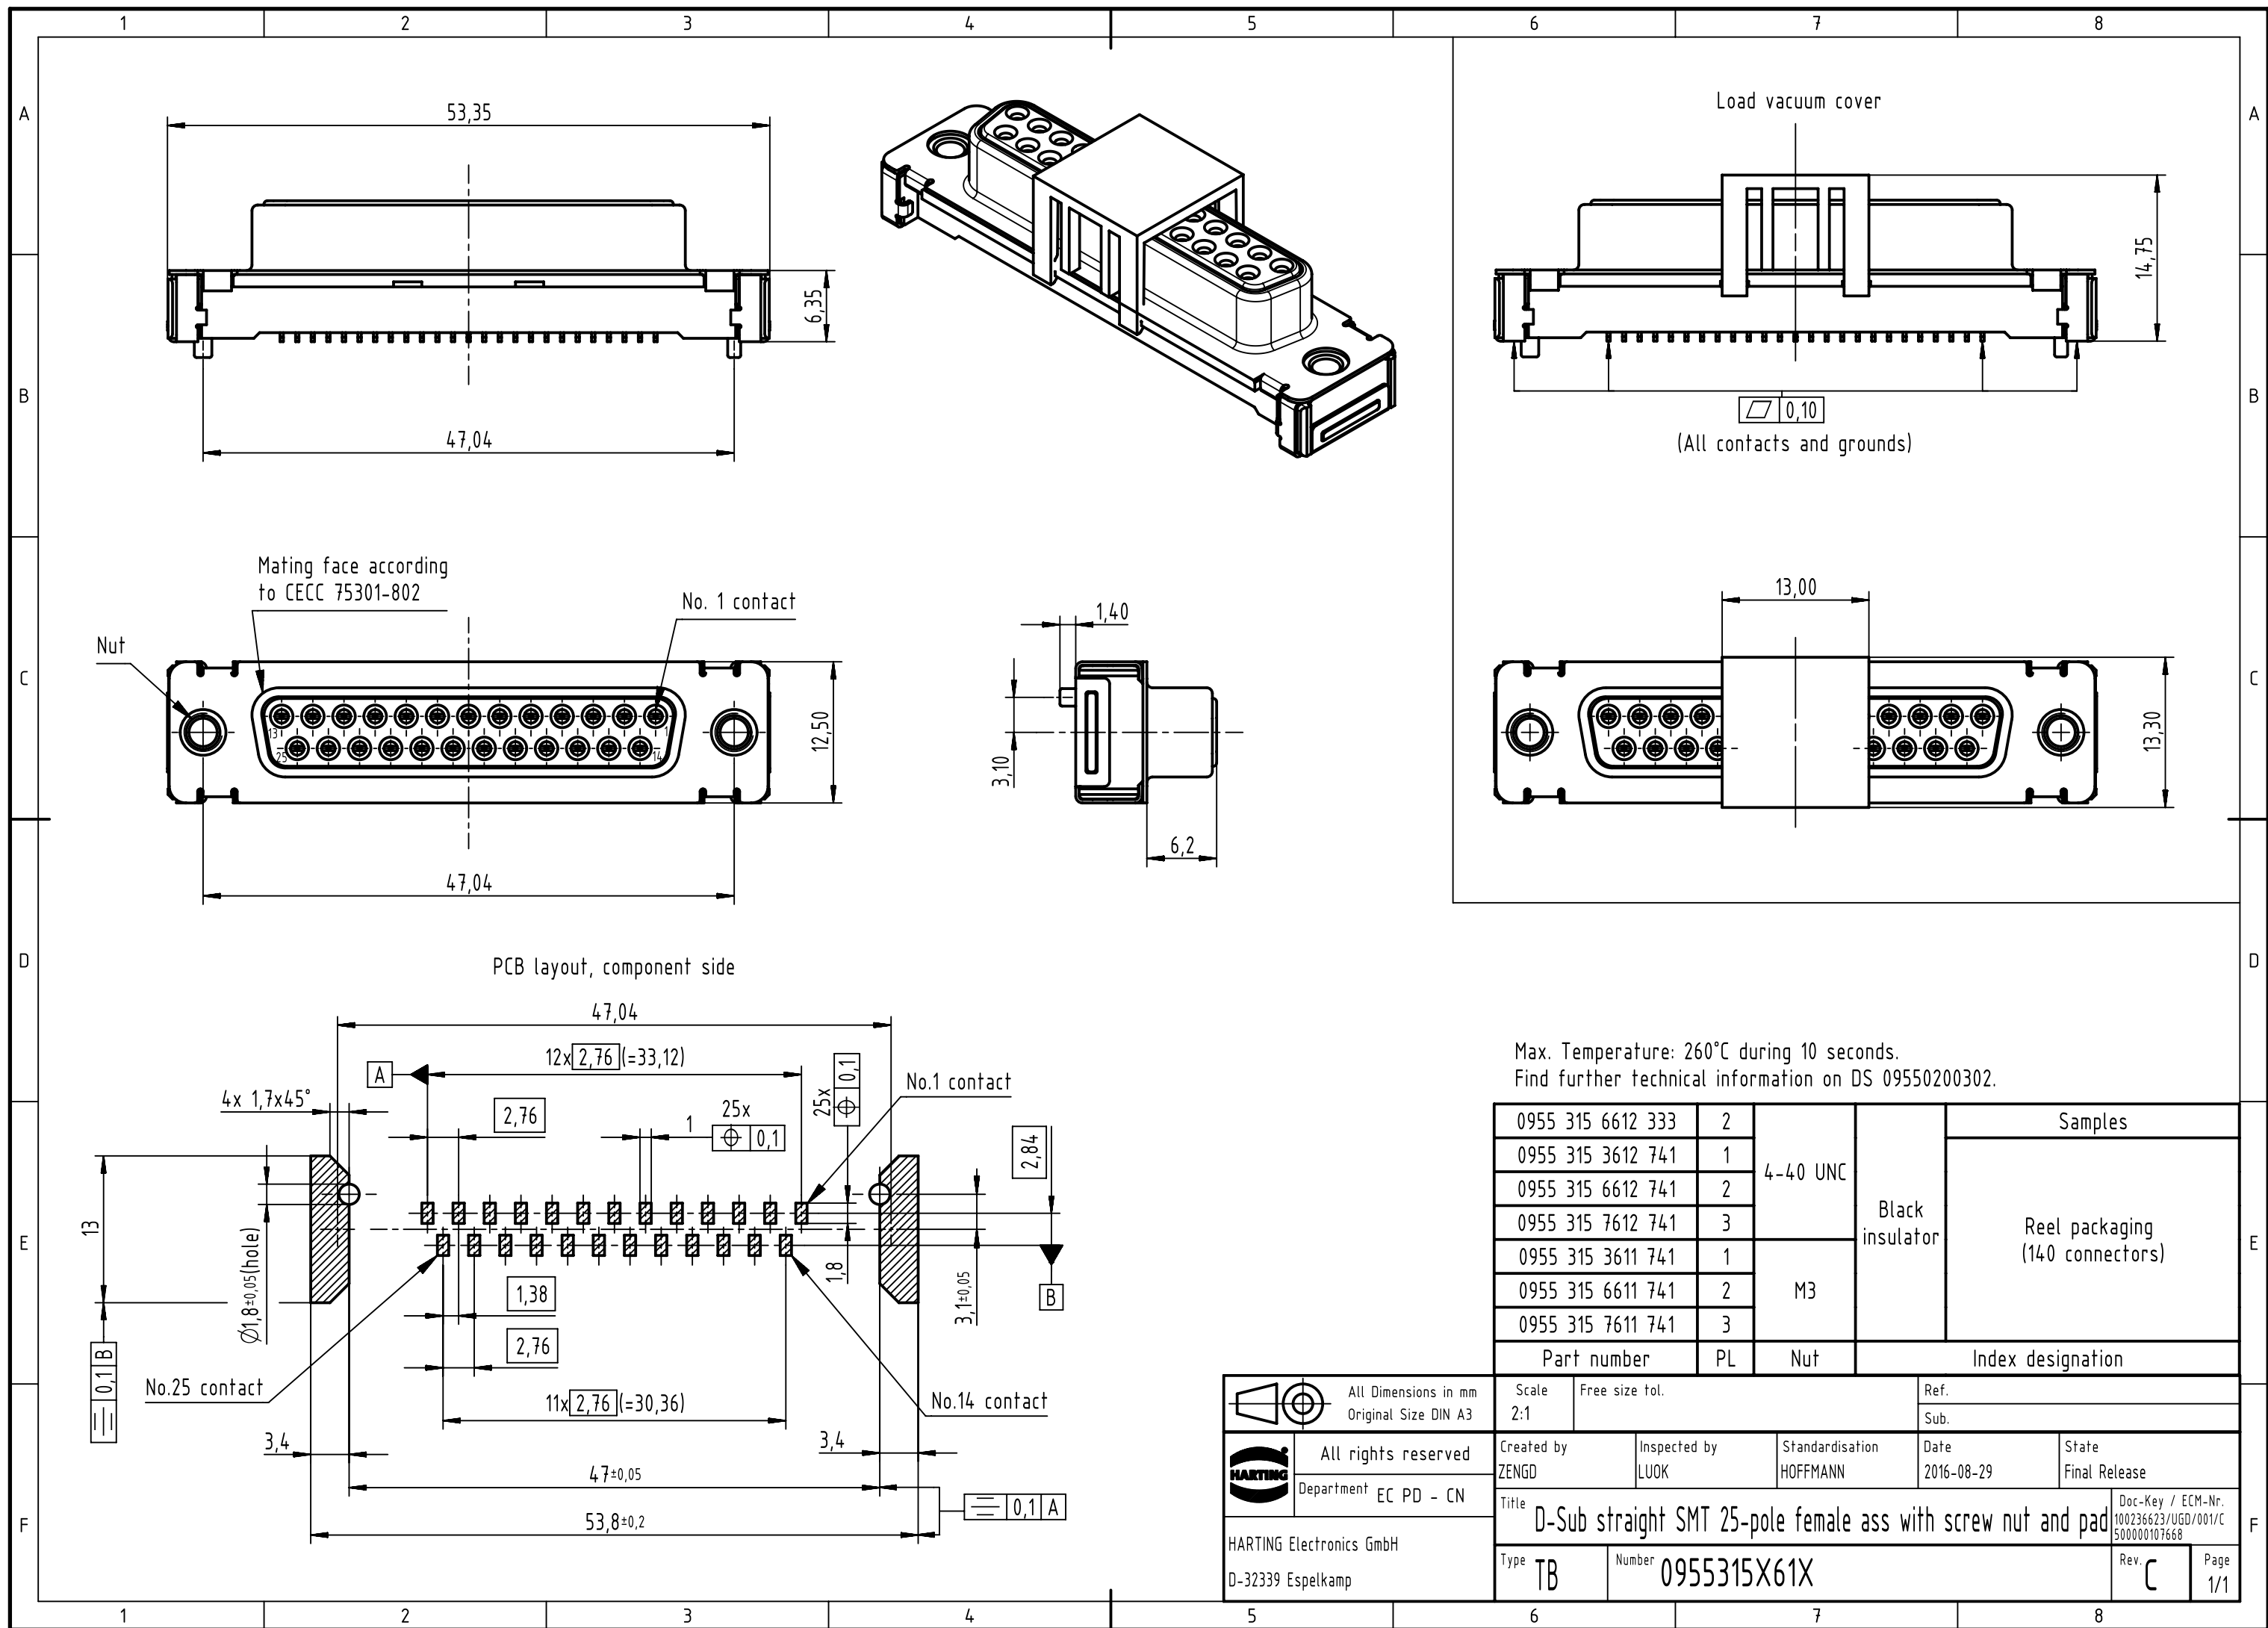

Max. Temperature: 260°C during 10 seconds.  
Find further technical information on DS 09550200302.

|                   |    |          |                   |                                    |
|-------------------|----|----------|-------------------|------------------------------------|
| 0955 315 6612 333 | 2  | 4-40 UNC | Black insulator   | Samples                            |
| 0955 315 3612 741 | 1  |          |                   | Reel packaging<br>(140 connectors) |
| 0955 315 6612 741 | 2  |          |                   |                                    |
| 0955 315 7612 741 | 3  |          |                   |                                    |
| 0955 315 3611 741 | 1  | M3       |                   |                                    |
| 0955 315 6611 741 | 2  |          |                   |                                    |
| 0955 315 7611 741 | 3  |          |                   |                                    |
| Part number       | PL | Nut      | Index designation |                                    |

|                                                                                       |  |                                              |  |                                                                       |  |                       |  |                             |  |                    |  |                                                          |  |
|---------------------------------------------------------------------------------------|--|----------------------------------------------|--|-----------------------------------------------------------------------|--|-----------------------|--|-----------------------------|--|--------------------|--|----------------------------------------------------------|--|
|  |  | All Dimensions in mm<br>Original Size DIN A3 |  | Scale<br>2:1                                                          |  | Free size tol.        |  | Ref.                        |  |                    |  |                                                          |  |
|                                                                                       |  |                                              |  |                                                                       |  |                       |  | Sub.                        |  |                    |  |                                                          |  |
|  |  | All rights reserved                          |  | Created by<br>ZENG                                                    |  | Inspected by<br>LUOK  |  | Standardisation<br>HOFFMANN |  | Date<br>2016-08-29 |  | State<br>Final Release                                   |  |
|                                                                                       |  | Department EC PD - CN                        |  |                                                                       |  |                       |  |                             |  |                    |  |                                                          |  |
| HARTING Electronics GmbH<br><br>D-32339 Espelkamp                                     |  |                                              |  | Title<br>D-Sub straight SMT 25-pole female ass with screw nut and pad |  |                       |  |                             |  |                    |  | Doc-Key / ECM-Nr.<br>100236623/UGD/001/C<br>500000107668 |  |
|                                                                                       |  |                                              |  | Type<br>TB                                                            |  | Number<br>0955315X61X |  |                             |  |                    |  | Rev.<br>C                                                |  |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

HARTING:

[09553156611741](#) [09553157612741](#) [09553157611741](#) [09553156612741](#)