

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** **0643211019**  
**Status:** **Active**  
**Overview:** CMC and CMX Sealed, Hybrid, Modular Connectors  
**Description:** .635mm, 1.50mm, 2.80mm, CMC Receptacle, 53 Circuits, Left Wire Output, Brown Coding, Mat Sealed

**Documents:**


<a href="#">3D Model</a>	<a href="#">Application Specification AS-98420-001-001 (PDF)</a>
<a href="#">Drawing (PDF)</a>	<a href="#">Application Specification AS-98420-001-CH-001 (PDF)</a>
<a href="#">Product Specification PS-64321-001-001 (PDF)</a>	<a href="#">Application Specification AS-98420-001-FR-001 (PDF)</a>
<a href="#">Application Specification AS-64318-002-001 (PDF)</a>	<a href="#">Application Specification AS-98420-001-SP-001 (PDF)</a>
<a href="#">Application Specification AS-64318-002-CH-001 (PDF)</a>	<a href="#">Packaging Specification PK-98995-001-001 (PDF)</a>
<a href="#">Application Specification AS-64318-002-FR-001 (PDF)</a>	<a href="#">RoHS Certificate of Compliance (PDF)</a>
<a href="#">Application Specification AS-64318-002-SP-001 (PDF)</a>	

**General**

Product Family	Crimp Housings
Series	64321
Application	Power, Wire-to-Board
Application Tooling Part Link	63812-1100
Application Tooling Part Link	63824-1200
Comments	* Current tested on a fully loaded connector, current for temperature increase of 40°C. Current max = 21.0A for 2.80mm Terminal (5.0mm <sup>2</sup> wire), 12.0A for 1.50mm Terminal (2.00mm <sup>2</sup> wire), 2.5A for 0.635mm Terminal (0.75mm <sup>2</sup> wire) *
More Detailed Tech Information	Sealed, high-density, power, modular connecting system for Power Train and Body Electronics applications in cars, trucks, busses
Overview	<a href="#">CMC and CMX Sealed, Hybrid, Modular Connectors</a>
Product Name	CMC
UPC	883906135188

**Physical**

Circuits (maximum)	53
Circuits Detail	5x 2.8mm, 8 x 1.5mm, 40 x 0.635mm terminals
Color - Resin	Brown
Gender	Receptacle
Glow-Wire Capable	No
Keying to Mating Part	Yes
Lock to Mating Part	Yes
Material - Resin	Polyester
Net Weight	50.860/g
Number of Rows	5
Packaging Type	Carton
Panel Mount	No
Pitch - Mating Interface	2.54mm, 3.50mm, 7.00mm
Polarized to Mating Part	Yes
Stackable	No
Temperature Range - Operating	-40° to +125°C

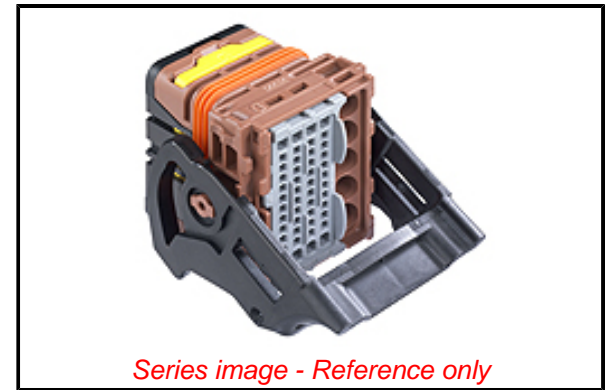

Series image - Reference only

**EU ELV**  
**Compliant**

**EU RoHS**  
**Compliant**

**REACH SVHC**  
Not Contained Per -  
ED/61/2018 (27 June  
2018)

**Halogen-Free**  
**Status**

**Not Relevant**

**Need more information on product environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS	Not Relevant
ELV	Compliant
Prop65	Compliant
RoHS Phthalates	Not Contained

**Search Parts in this Series**

[64321](#) Series

**Mates With**

Please Contact Molex for Details

**Use With**

Female Terminals [64322](#) CP 0.635, [64323](#) CP 1.5. Circuit Way Plugs [64325-1010](#) , [64325-1023](#) , [64325-1091](#). CMC Wire Cap [64321-1101](#). Header [989971002](#)

**Electrical**

Current - Maximum per Contact 12.0A, 2.5A, 21.0A

**Solder Process Data**

Lead-freeProcess Capability N/A

**Material Info****Reference - Drawing Numbers**

Application Specification AS-64318-002-001, AS-64318-002-CH-001,  
AS-64318-002-FR-001, AS-64318-002-SP-001,  
AS-98420-001-001, AS-98420-001-CH-001,  
AS-98420-001-FR-001, AS-98420-001-SP-001  
Packaging Specification PK-98995-001-001  
Product Specification PS-64321-001-001  
Sales Drawing SD-64321-001

This document was generated on 09/12/2018

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[64321-1019](#)