



IP67 Sealed Toggle Switches

Highest quality for the most demanding applications



3000 Series

Standard 15/32" diameter bushing. Standard Bat length is .560".

Current Rating	Catalog No.	Action	Termination
15A -125VAC, 10A-250VAC	3005C	Fig 1 SPST on-none-off	.250" QC
15A -125VAC, 10A-250VAC	3005D	Fig 2 SPST on-none-off	6" Wire Leads, #16 Gauge
15A -125VAC, 10A-250VAC	3001C	Fig 1 SPDT on-none-on	.250" QC
15A -125VAC, 10A-250VAC	3001D	Fig 2 SPDT on-none-on	6" Wire Leads, #16 Gauge
15A -125VAC, 10A-250VAC	3002C	Fig 1 SPDT on-off-on	.250" QC
15A -125VAC, 10A-250VAC	3002D	Fig 2 SPDT on-off-on	6" Wire Leads, #16 Gauge

3000 Series Toggle

Electrical Rating: 15A - 125 VAC , 10A - 250 VAC


Life Cycles: 100,000 Electrical 100,000 Mechanical

Operating Temp: -10°C to +65°C

Sealing: seal tested per IP67 standards to withstand submersion in water to a depth of 1 meter for 30 minutes, Meets IP68

Dielectric Strength 1000 Volts RMS Minimum

Mounting Means 15/32" Bushing, Keyway .078 - .083 Wide X .037 - .043 Deep, Standard Hardware supplied

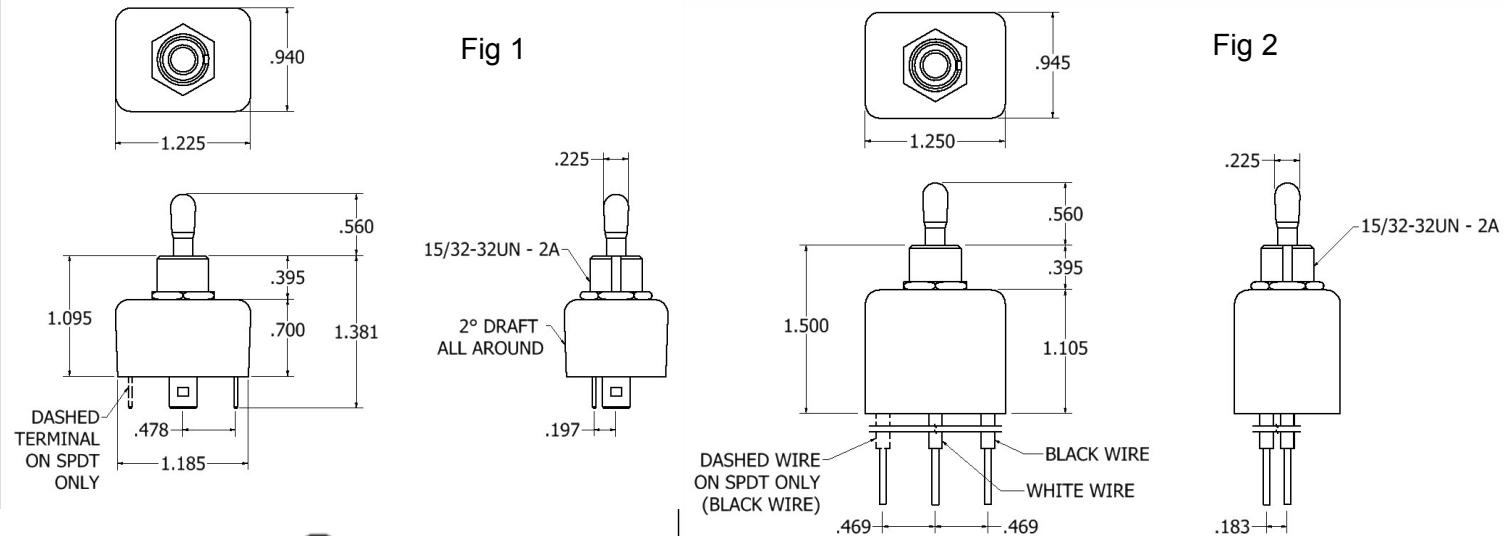

All Information subject to change without notice

Flier EEP-SG-15 RevA ©Copyright Electroswitch 2014

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Electroswitch:](#)

[3001C](#) [3005D](#) [3002C](#) [3005C](#) [3002D](#) [3001D](#)