
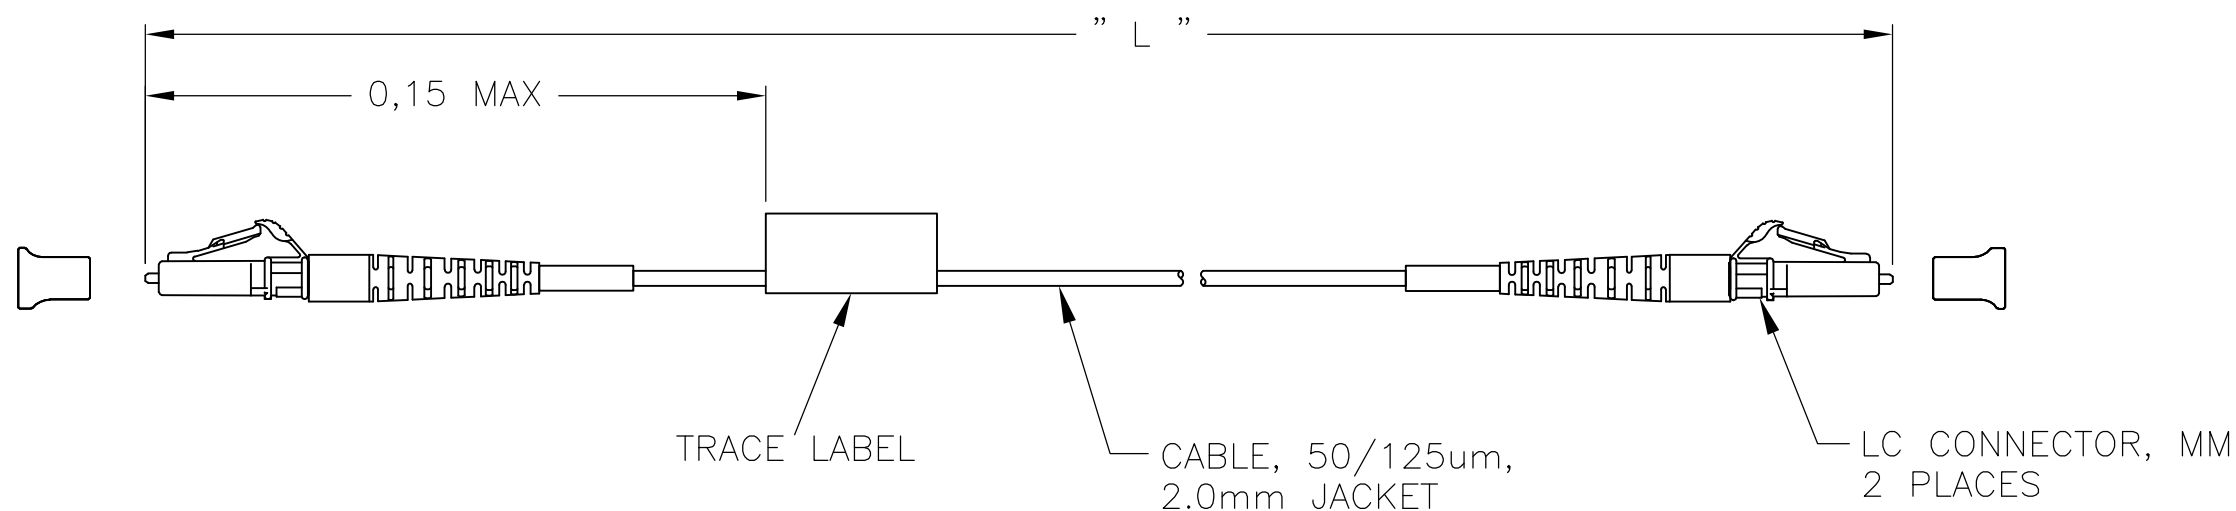


1 MAXIMUM CONNECTOR INSERTION LOSS IS 0,2dB PLUS
CABLE ATTENUATION OF 1,5dB/Km AT 1300nm(SEE TABLE)

2. PRODUCT AND PROCESSING MUST MEET
REQUIREMENTS OF TE STANDARD TEC-138-702



0.20	0.200+0.030/−0.000 [7.87+1.18/−0.00]	8−6374656−0
0.22	10.00±0.15 [393.70±6.00]	1−6374656−0
0.21	5.00±0.08 [196.9±3.1]	6374656−5
0.21	4.00±0.08 [157.5±3.00]	6374656−4
0.20	3.00±0.05 [118.1±2.0]	6374656−3
0.20	2.00±0.05 [78.7±2.0]	6374656−2
0.20	1.00±0.05 [39.4±2.0]	6374656−1
MAX IL(dB) 	L METERS [INCHES]	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.S.VASU 15SEP05 CHK J.DUNCAN 15SEP05 APVD J.DUNCAN 15SEP05		 TE Connectivity	
DIMENSIONS: METERS [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME CABLE ASSEMBLY, FIBER OPTIC, 50/125um, 2.0mm LC TO LC —	
		0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± — 4 PLC ± — ANGLES ± —		PRODUCT SPEC — APPLICATION SPEC — WEIGHT —	
MATERIAL —		FINISH —		SIZE A3	
				CAGE CODE 00779	
				DRAWING NO C=6374656	
				RESTRICTED TO —	
CUSTOMER DRAWING				SCALE NTS	
				SHEET 1 OF 1	
				REV D	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[8-6374656-0](#)