


# Product data sheet

## Characteristics

# XZCR1510040H2

jumper cable XZ - male straight M12 3-pin - female elbowed M8 3-pin - PUR 2m

Product availability: Non-Stock - Not normally stocked in distribution facility

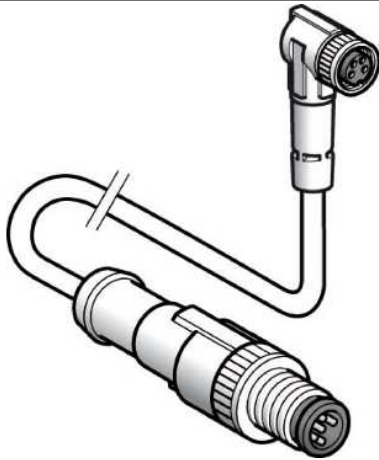

### Main

Commercial Status	Commercialised
Accessory / separate part category	Cabling accessories
Accessory / separate part type	Jumper cable
Jumper cable end 1	M12 male 3 pins straight connector with screw-on
Jumper cable end 2	M8 female 3 pins elbowed connector with screw-on

### Complementary

Cable composition	3 x 0.34 mm <sup>2</sup>
Cable length	6.56 ft (2 m)
Wire insulation material	PUR
Cable outer diameter	0.2 in (5.2 mm)
[Ue] rated operational voltage	75 V DC 60 V AC
[In] rated current	4 A
Insulation resistance	>= 1000 MOhm
Resistance across terminals	<= 5000 mOhm
Product weight	0.18 lb(US) (0.08 kg)

### Environment

IP degree of protection	IP67
Ambient air temperature for operation	23...194 °F (-5...90 °C) (flexing) -31...194 °F (-35...90 °C) (static)
Ambient air temperature for storage	-31...212 °F (-35...100 °C)

### Ordering and shipping details

Category	22483 - MACHINE CABLES
Discount Schedule	DS3
GTIN	003389110762679
Nbr. of units in pkg.	1
Package weight(Lbs)	0.19
Product availability	Non-Stock - Not normally stocked in distribution facility
Returnability	N
Country of origin	PL

### Offer Sustainability

Sustainable offer status	Not Green Premium product
RoHS	Compliant - since 0649 - <a href="#">Schneider Electric declaration of conformity</a>

### Contractual warranty

Period	18 months
--------	-----------

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Schneider Electric:](#)

[XZCR1510040H2](#)