



LOC	DISP	REV	DATE	APP
G	14			
REVISIONS				
			DESCRIPTION	
			REVISED PER 0720-0230-93	
				2/28/94

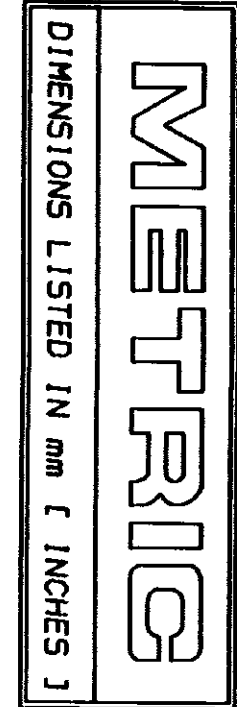

AMP WIRE RANGE	IL E13288 Listed
22-16 AWG STRANDED	22-16 AWG STRANDED
LR7189 Certified	MILITARY P/N AND CLASS
NOT CERTIFIED	NOT APPLICABLE

STAMP AMP 22-18* APPROX AS SHOWN
 22-16 TERMINALS ARE STAMPED 22-18 IN
 ACCORDANCE WITH MILITARY SPECIFICATION
 MIL-T-7928, COMMERCIAL WIRE RANGE IS 22-16

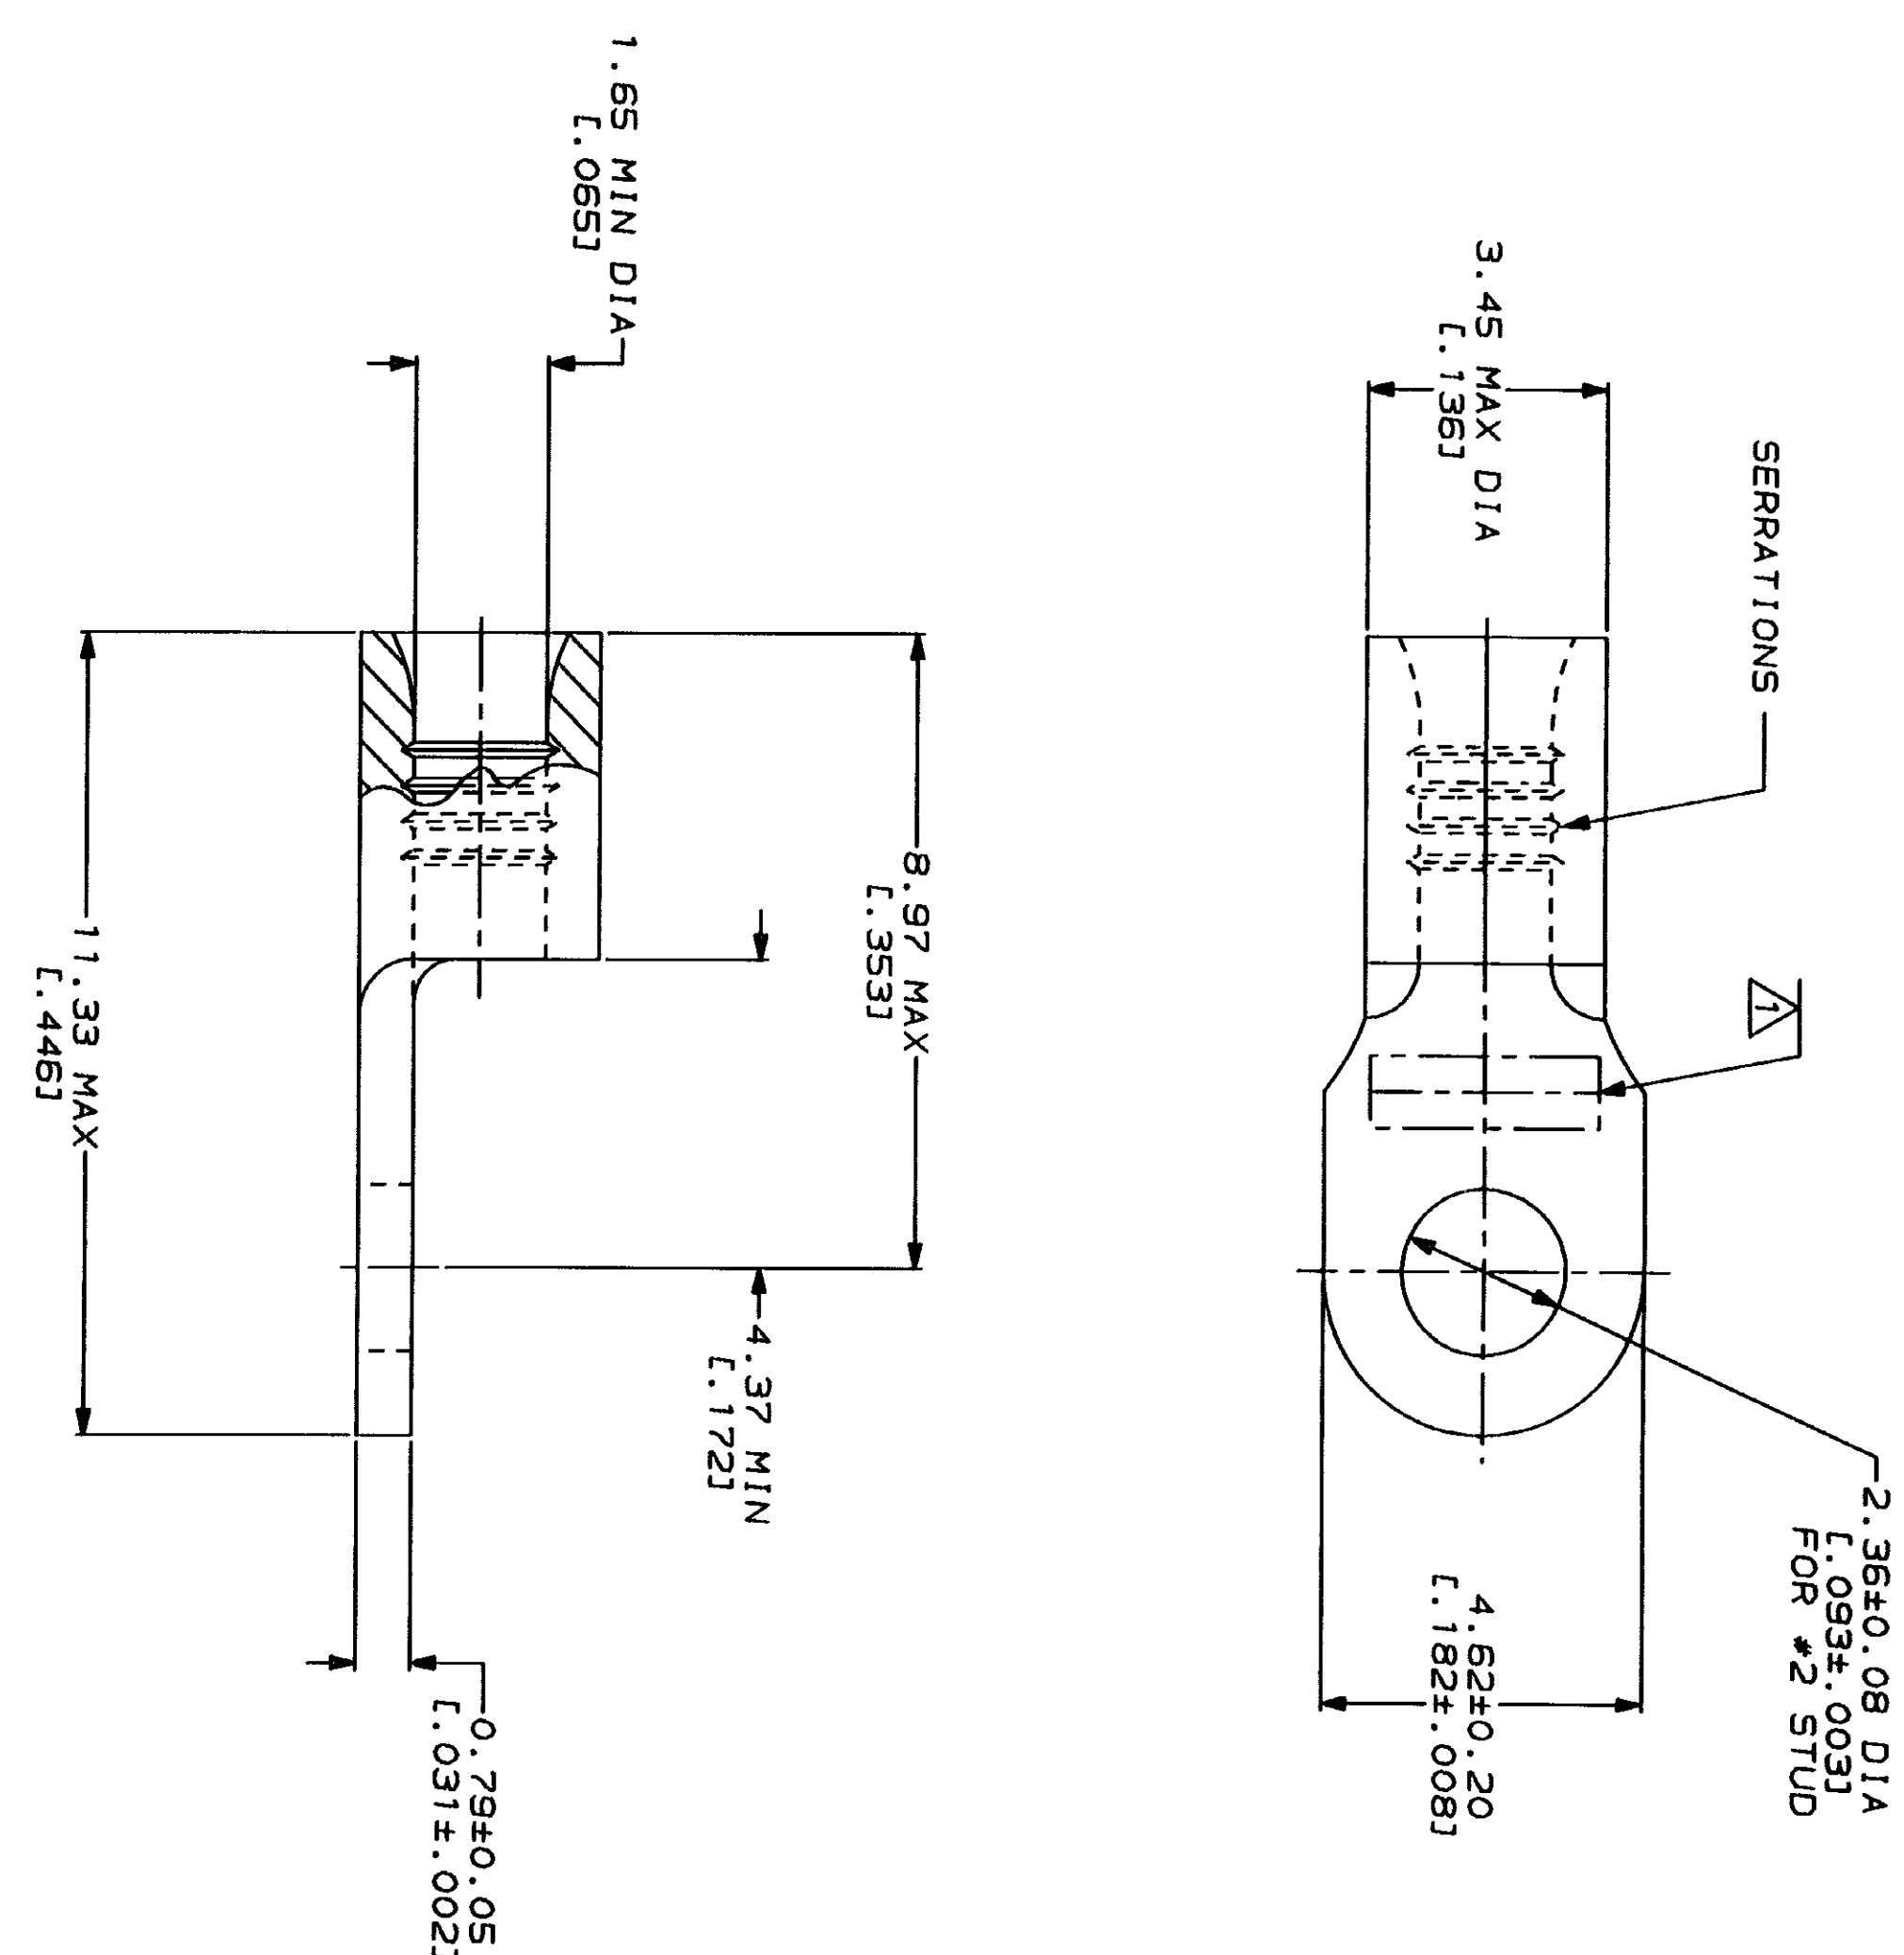

AMP INCORPORATED
 CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS
 1-800-522-6752

FOR APPLICATION TOOLS AND INFORMATION
 1-800-722-1111

FOR ORDER ENTRY
 1-800-526-5142

MAX RECOMMENDED OPERATING TEMPERATURE: 170°C MAX

VOLTAGE RATING: NOT APPLICABLE

WIRE CROSS SECTIONAL AREA RANGE: 0.26-1.65mm² [509-3,260] CIR MILS STRANDED

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES - TOLERANCES ON 1/16" PLG DEC ± .001 ANGLES 3/16" DEC ± .001

DR 2-2-93 TA BRILKMAN
 CHK 2-2-93 DA PATTERSON
 APPD 2-2-93 DE MILLER
 APPD 2-2-93 JL NECKLEY
 PRODUCT SPEC

AMP Incorporated
 Harrisburg, PA 17105-3608

TERMINAL, RING TONGUE, BUDGET

FINISH TIN PLATE
 0.00254 [L.000100] MIN THK PER MIL-T-10727

APPLICATION SPEC

SCALE 10:1

DRAWING NO G-320677

SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[320677](#)