


SMA Hand-Formable Fixed Length Cable Assemblies for RF/Microwave Applications

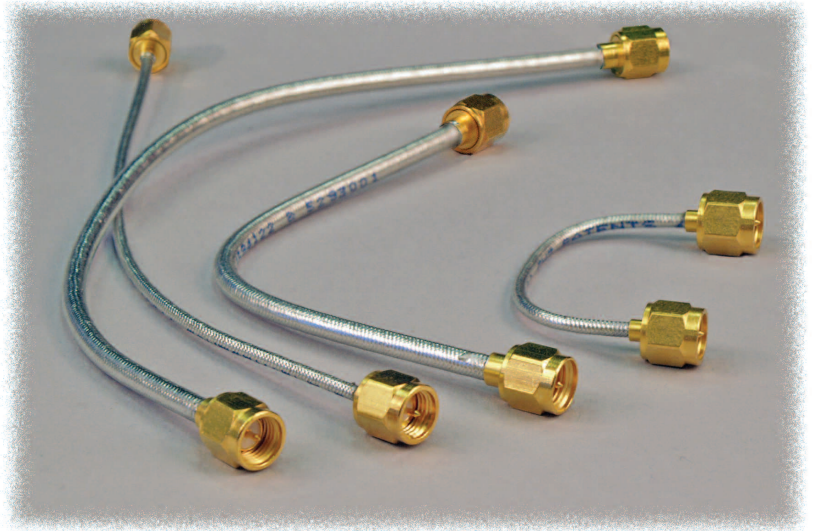

Emerson Network Power Connectivity Solutions has added to its Johnson® product line a series of SMA Hand-Formable, fixed-length cable assemblies for RF/Microwave applications.

These Hand-Formable cable assemblies are an excellent alternative to semi-rigid cables which are more costly and less flexible during early stages of design and effectively eliminate additional tooling charges.

In conjunction with our popular Johnson® brand of connectors on each end, these SMA Hand-Formable cable assemblies are constructed of a silver-plated, copper covered steel conductor, with an additional copper-tin composite braid foil. When RF interference isn't an option, these cables provide 100% shielded cable coverage assuring an outstanding VSWR and low insertion loss of up to 18 GHz.

Available in a variety of lengths off-the-shelf, these Hand-Formable SMA cable assemblies offer users a high quality, low cost solution. As with all other RF cable assemblies provided by Johnson®, these assemblies are also available in custom lengths upon request.

Key Features & Benefits

- Constructed with Johnson® Premium SMA Connectors
- Assembled with 50 Ohm Hand-Formable Microwave Cable
- 100% Shielded Cable Coverage
- Available in .086 & .141 cable diameters
- Off-the-Shelf Availability
- Low-cost alternative to Custom-made cables
- Excellent VSWR to 18 GHz for Microwave applications



| Part No. | Cable Assembly | Conn. 1 | Conn. 2 | Length* |
|--------------|--------------------------|--------------------|--------------------|---------|
| 415-0081-003 | Hand-Formable .086 Cable | SMA Plug, Straight | SMA Plug, Straight | 3 in. |
| 415-0081-004 | Hand-Formable .086 Cable | SMA Plug, Straight | SMA Plug, Straight | 4 in. |
| 415-0081-005 | Hand-Formable .086 Cable | SMA Plug, Straight | SMA Plug, Straight | 5 in. |
| 415-0081-006 | Hand-Formable .086 Cable | SMA Plug, Straight | SMA Plug, Straight | 6 in. |
| 415-0081-007 | Hand-Formable .086 Cable | SMA Plug, Straight | SMA Plug, Straight | 7 in. |
| 415-0081-008 | Hand-Formable .086 Cable | SMA Plug, Straight | SMA Plug, Straight | 8 in. |
| 415-0081-012 | Hand-Formable .086 Cable | SMA Plug, Straight | SMA Plug, Straight | 12 in. |
| 415-0081-018 | Hand-Formable .086 Cable | SMA Plug, Straight | SMA Plug, Straight | 18 in. |
| 415-0081-024 | Hand-Formable .086 Cable | SMA Plug, Straight | SMA Plug, Straight | 24 in. |
| 415-0082-003 | Hand-Formable .141 Cable | SMA Plug, Straight | SMA Plug, Straight | 3 in. |
| 415-0082-004 | Hand-Formable .141 Cable | SMA Plug, Straight | SMA Plug, Straight | 4 in. |
| 415-0082-005 | Hand-Formable .141 Cable | SMA Plug, Straight | SMA Plug, Straight | 5 in. |
| 415-0082-006 | Hand-Formable .141 Cable | SMA Plug, Straight | SMA Plug, Straight | 6 in. |
| 415-0082-007 | Hand-Formable .141 Cable | SMA Plug, Straight | SMA Plug, Straight | 7 in. |
| 415-0082-008 | Hand-Formable .141 Cable | SMA Plug, Straight | SMA Plug, Straight | 8 in. |
| 415-0082-012 | Hand-Formable .141 Cable | SMA Plug, Straight | SMA Plug, Straight | 12 in. |
| 415-0082-018 | Hand-Formable .141 Cable | SMA Plug, Straight | SMA Plug, Straight | 18 in. |
| 415-0082-024 | Hand-Formable .141 Cable | SMA Plug, Straight | SMA Plug, Straight | 24 in. |

*Ref Plane to Ref Plane

Electrical Ratings

| Part No. | Length (inches) | Nominal Electrical Delay (ns) | Insertion Loss (dB Max) Vs Frequency (GHz) | | | | | | VSWR (MAX) Vs Frequency (GHz) | | |
|--------------|-----------------|-------------------------------|--|--------|--------|--------|---------|----------|-------------------------------|--------|----------|
| | | | 0 to 1 | 1 to 2 | 2 to 4 | 4 to 6 | 6 to 12 | 12 to 18 | 0 to 1 | 1 to 2 | 2 to 18 |
| 415-0081-003 | 3.00±.05 | 0.36 | 0.12 | 0.17 | 0.24 | 0.29 | 0.41 | 0.51 | 1.06 | 1.10 | 1.1+.01f |
| 415-0081-004 | 4.00±.05 | 0.49 | 0.14 | 0.20 | 0.29 | 0.35 | 0.49 | 0.60 | | | |
| 415-0081-005 | 5.00±.10 | 0.61 | 0.17 | 0.23 | 0.33 | 0.40 | 0.57 | 0.70 | | | |
| 415-0081-006 | 6.00±.10 | 0.73 | 0.19 | 0.26 | 0.38 | 0.46 | 0.65 | 0.79 | | | |
| 415-0081-007 | 7.00±.10 | 0.85 | 0.21 | 0.30 | 0.42 | 0.51 | 0.72 | 0.89 | | | |
| 415-0081-008 | 8.00±.10 | 0.97 | 0.23 | 0.33 | 0.47 | 0.57 | 0.80 | 0.98 | | | |
| 415-0081-012 | 12.00±.15 | 1.46 | 0.32 | 0.45 | 0.65 | 0.79 | 1.11 | 1.36 | | | |
| 415-0081-018 | 18.00±.15 | 2.19 | 0.46 | 0.64 | 0.92 | 1.12 | 1.58 | 1.93 | | | |
| 415-0081-024 | 24.00±.15 | 2.92 | 0.59 | 0.83 | 1.19 | 1.45 | 2.04 | 2.49 | | | |
| 415-0082-003 | 3.00±.05 | 0.36 | 0.09 | 0.13 | 0.19 | 0.24 | 0.34 | 0.43 | 1.06 | 1.10 | 1.1+.01f |
| 415-0082-004 | 4.00±.05 | 0.49 | 0.10 | 0.15 | 0.22 | 0.27 | 0.39 | 0.49 | | | |
| 415-0082-005 | 5.00±.10 | 0.61 | 0.12 | 0.17 | 0.24 | 0.30 | 0.44 | 0.56 | | | |
| 415-0082-006 | 6.00±.10 | 0.73 | 0.13 | 0.18 | 0.27 | 0.34 | 0.49 | 0.62 | | | |
| 415-0082-007 | 7.00±.10 | 0.85 | 0.14 | 0.20 | 0.30 | 0.37 | 0.54 | 0.69 | | | |
| 415-0082-008 | 8.00±.10 | 0.97 | 0.15 | 0.22 | 0.32 | 0.40 | 0.59 | 0.75 | | | |
| 415-0082-012 | 12.00±.15 | 1.46 | 0.20 | 0.29 | 0.43 | 0.54 | 0.79 | 1.01 | | | |
| 415-0082-018 | 18.00±.15 | 2.19 | 0.27 | 0.39 | 0.59 | 0.74 | 1.09 | 1.40 | | | |
| 415-0082-024 | 24.00±.15 | 2.92 | 0.35 | 0.50 | 0.75 | 0.94 | 1.39 | 1.79 | | | |

Emerson Network Power.
The global leader in enabling
Business-Critical Continuity.

- AC Power Systems
- Embedded Power
- Outside Plant
- Connectivity
- Inbound Power
- Precision Cooling
- DC Power Systems
- Integrated Cabinet Solutions
- Site Monitoring and Services

Emerson Network Power Connectivity Solutions
Johnson
299 Johnson Ave., Suite 100
Waseca, MN 56093

Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co.
©2006 Emerson Electric Co.

For product information:
www.EmersonNetworkPower.com/Connectivity
or call 800.247.8256

JCI0606-HFC

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions:](#)

[415-0081-005](#)