
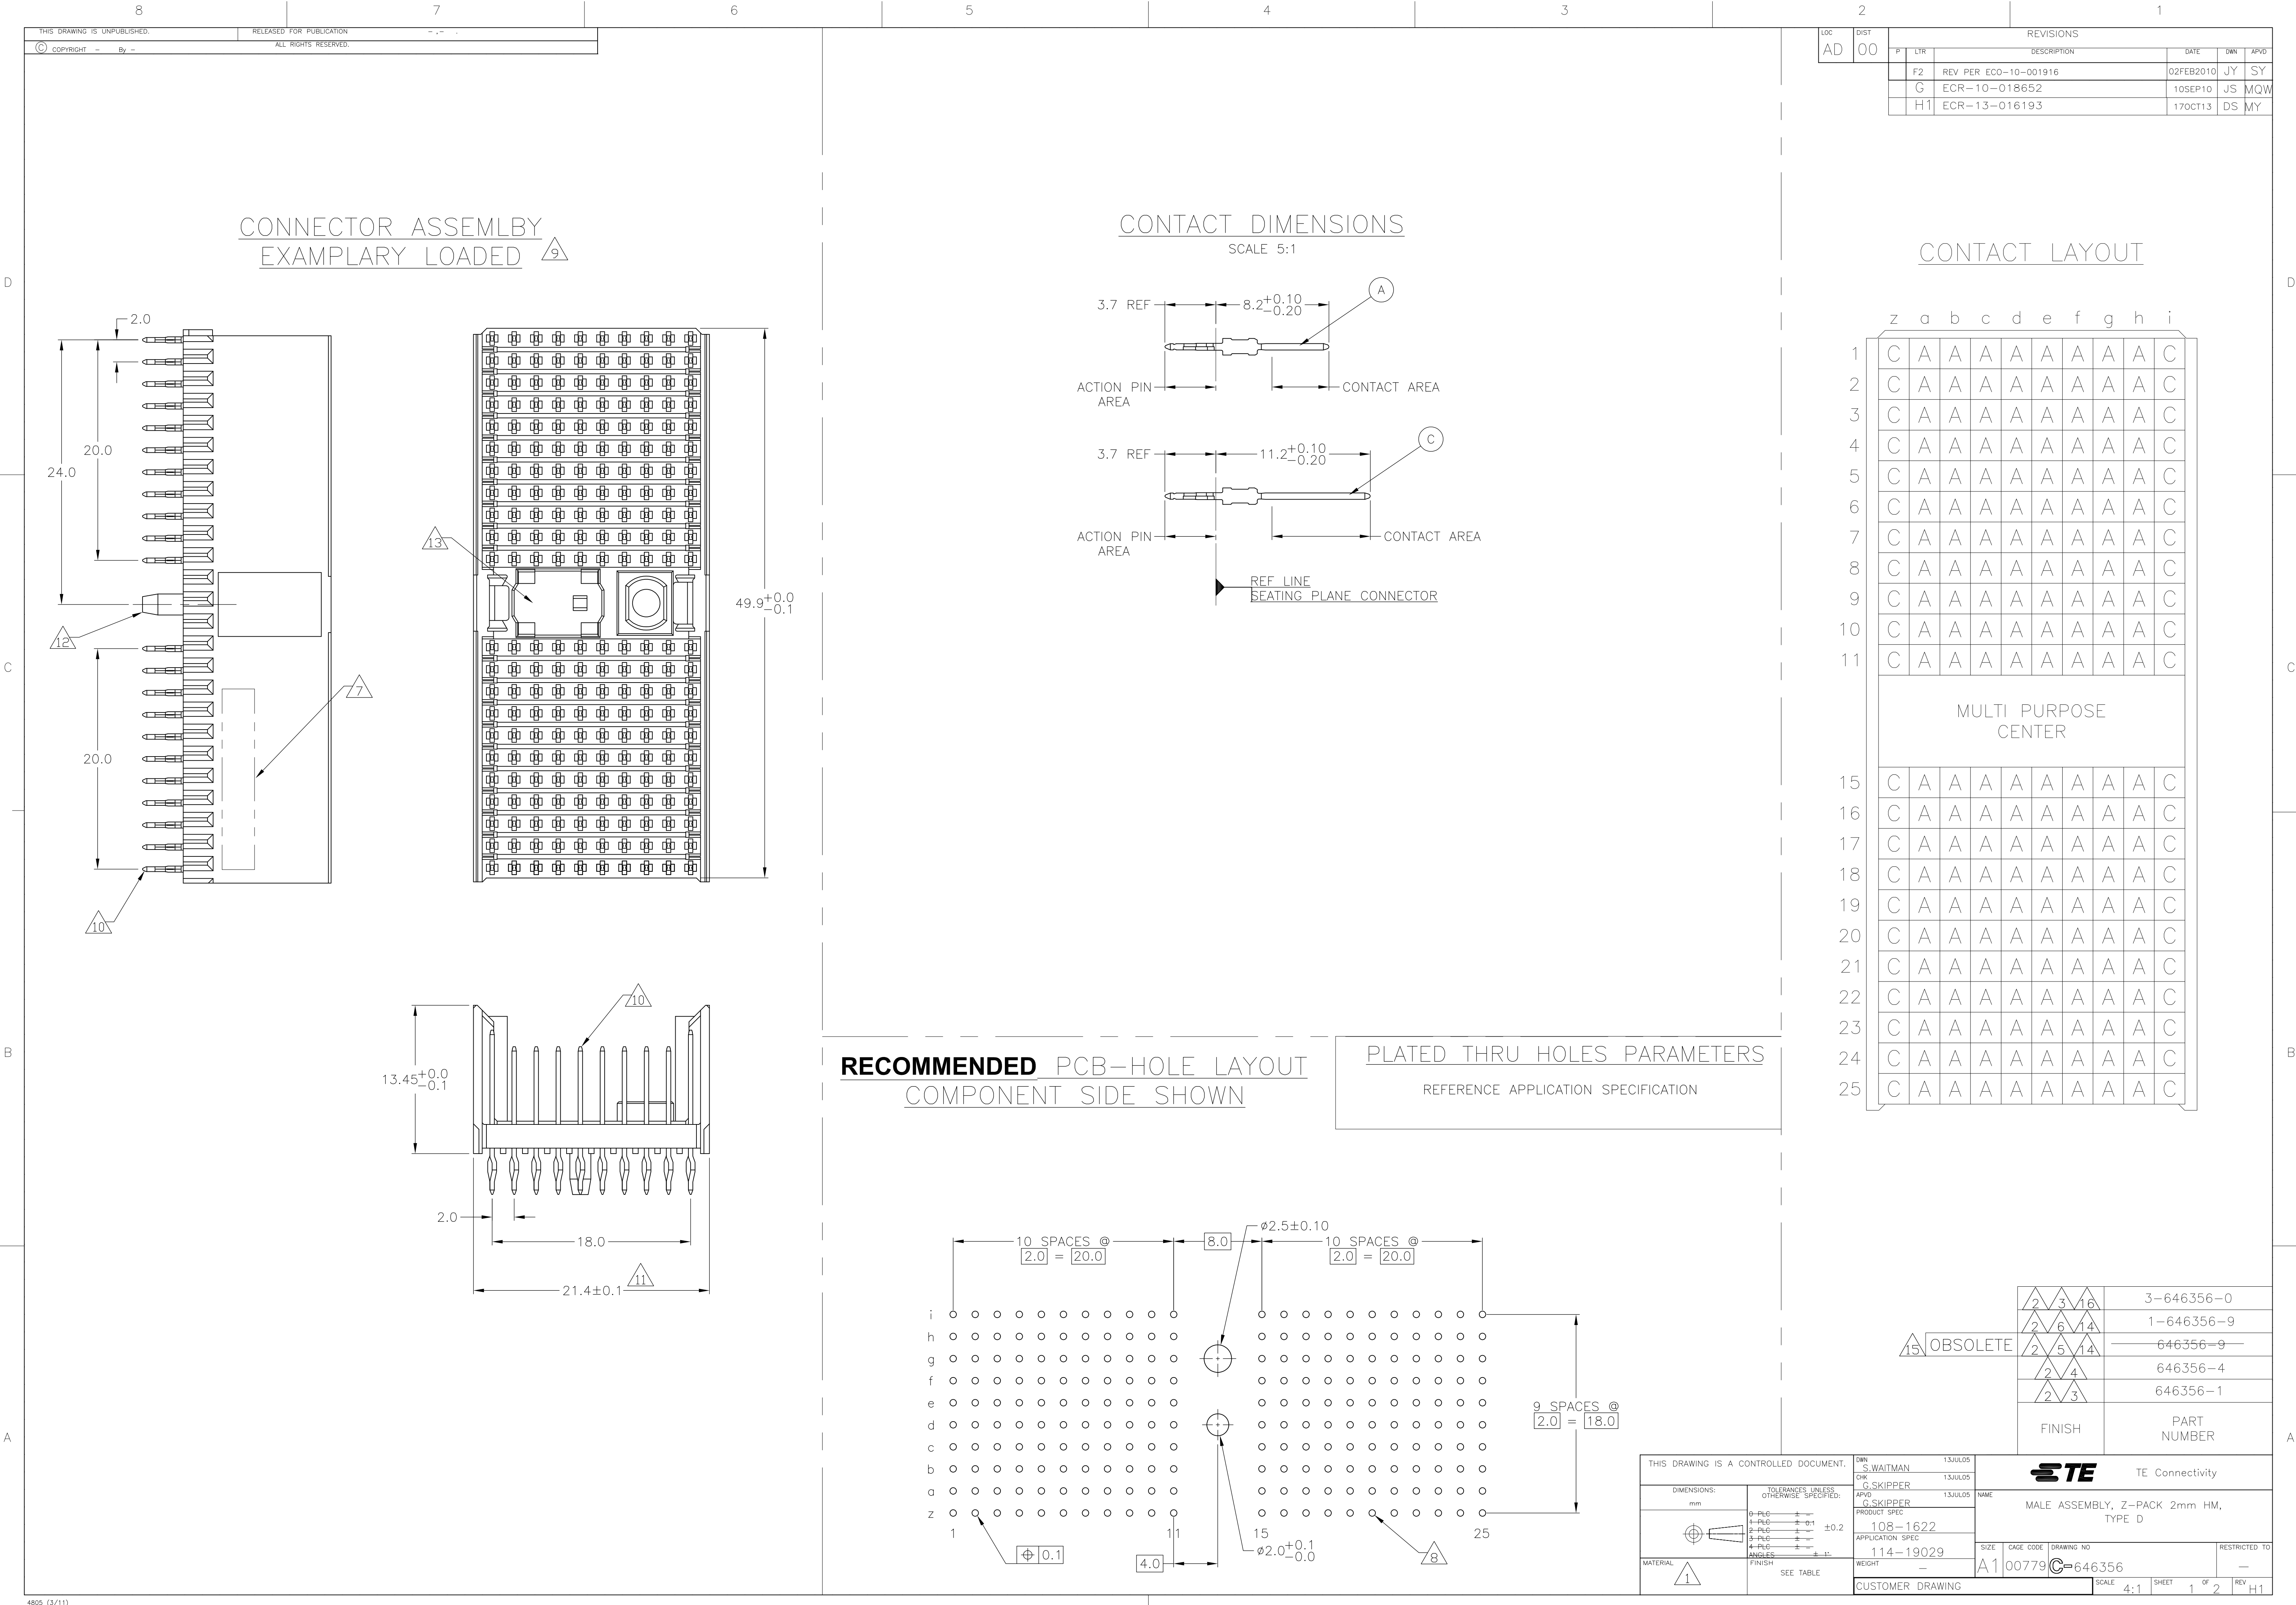




LOC	DIST	REVISIONS				
AD	00	IP	LTR	DESCRIPTION	DATE	DWN
		-	-	SEE SHEET 1	-	-

- 1
- MATERIAL:
CONTACT: PHOSPHOR BRONZE.
HOUSING: GLASS-FILLED POLYESTER.
- 2
- GENERAL PLATING SPECIFICATION: UNDERPLATING
(ENTIRE CONTACT): 1.27µm MIN NICKEL AND ACTION
PIN: 0.5µm MIN TIN\LEAD.
FOR PLATING OF MATING SURFACES SEE APPLICABLE
SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
- 3
- CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101
PERFORMANCE LEVEL 2.
- 4
- CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101
PERFORMANCE LEVEL 1.
- 5
- CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL 3,
CENTRAL OFFICE APPLICATIONS.
- 6
- CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL 3,
UNCONTROLLED ENVIROMENT APPLICATIONS.
- 7
- CONNECTOR MARKED WITH PART NUMBER AND DATE CODE.
ADDITIONAL CHARACTERS OR MARKINGS, AS WELL AS THE LOCATION OF THE MARKINGS,
MAY BE ADDED FOR TRACEABILITY BASED UPON MANUFACTURERS DISCRETION.
- 8
- PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID
PATTERN DEFINED BY CONTACT LAYOUT.
- 9
- FOR ACTUAL PIN LOADING SEE "CONTACT LAYOUT".
- 10
- FOR ACTUAL PIN DIMENSIONS SEE "CONTACT DIMENSIONS".
- 11
- TO BE MEASURED AT BOTTOM OF SHROUD.
- 12
- POLARIZATION FEATURE.
- 13
- AREA RESERVED FOR KEYING PART (BASIC P/N 100525).
- 14
- CONNECTOR LUBRICATED WITH BELCORE APPROVED LUBRICANT,
TECHNICAL REFERENCE: TR-NWT-001217 ISSUE 1, SEP 1992.
- 15
- OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- 16
- 0.76µm MIN GOLD PLATING AT MATING SURFACES.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S.WAITMAN 13JUL05	 TE Connectivity	
		CHK G.SKIPPER 13JUL05		
DIMENSIONS: mm		APVD G.SKIPPER 13JUL05		NAME
		PRODUCT SPEC		MALE ASSEMBLY, Z-PACK 2mm HM, TYPE D
		108-1622		
		APPLICATION SPEC		
MATERIAL SEE SHEET 1		114-19029		SIZE A1
FINISH SEE SHEET 1		WEIGHT -		CAGE CODE 00779
		CUSTOMER DRAWING		DRAWING NO 646356
		SCALE 4:1		SHEET 2
		OF 2		REV H1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[646356-1](#)