


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:

- ** 1. SEE CURRENT CATALOG FOR VARIOUS APPLICATIONS AND TO INDICATE COLOR AND/OR PACKAGE QUANTITY.
2. SEE CATALOG FOR A COMPLETE LIST OF PARTS APPLICABLE FOR USE WITH THIS PART.
3. TERMINATED WITH (8 POSITION) SHIELDED MODULAR PLUGS ON BOTH ENDS PER T568A.
4. CONSTRUCTED WITH 26AWG STRANDED CAT5e F/UTP LSZH/CM PATCH CABLE. CABLE COLOR: INTERNATIONAL GRAY
5. MATERIAL:
 - PLUG: POLYCARBONATE
 - SHIELD: COPPER ALLOY NICKEL PLATED
 - BOOT: THERMOPLASTIC RESIN
 - CABLE: DUAL-RATED CM/LSZH
6. NOMINAL CABLE JACKET DIAMETER IS 0.205 IN (5.21MM).

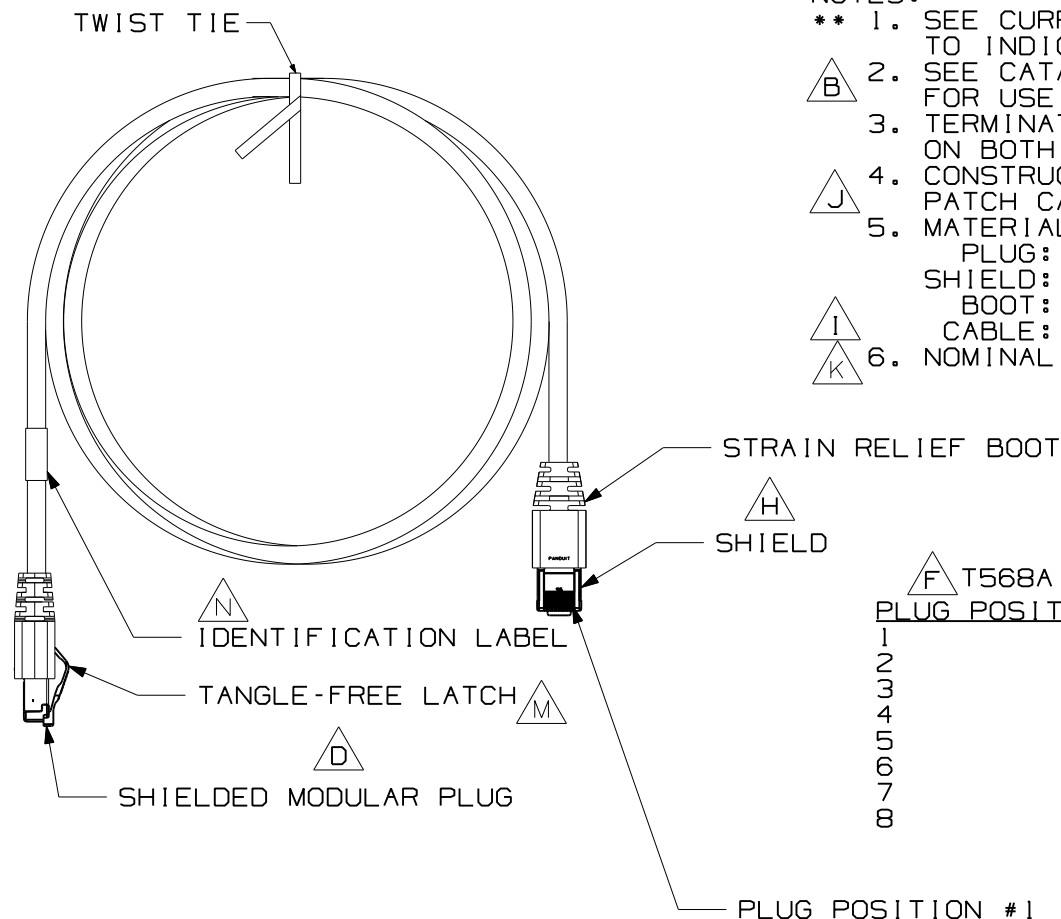

T568A WIRING SCHEME	
PLUG POSITION:	CABLE WIRE:
1	WHITE/GREEN
2	GREEN
3	WHITE/ORANGE
4	BLUE
5	WHITE/BLUE
6	ORANGE
7	WHITE/BROWN
8	BROWN

SEE SHEET 2 FOR PATCH CORD LENGTHS AND PART NUMBERS

MODEL FILENAME										SIZE
DRAWING FILENAME										A
M01895CB_DC07/00E										
TX5e SHIELDED PATCH CORDS (CM/LSZH)										
CUSTOMER DRAWING										
G										
4	5-13-10	BJN		N. ADDED IDENTIFICATION LABEL M. ADDED TANGLE-FREE LATCH K. ADDED NEW NOTE 6 L. ADDED BROWN	01895-07					I.I. NUMBER
3	3-4-10	BJN	KA	J. SPECIFIED LSZH/CM PATCH CABLE: NOTE 4	01895-07		PBD			PRODUCT SPEC/ PKG SPEC
2	5-9-08	BJN	EJH	I. ADDED CABLE SPEC; MOVED BOOT COLORS TO SH2	01895-07		REGA			ASSY METHOD/ TEST METHOD
1	4-23-07	BJN	EJH	G. TX5e WAS CAT 5E H. ADDED SHIELD F. ADDED T568A WIRING SCHEME E. MOVED CABLE P/N TO SH2 C. ADDED COLOR TABLE D. ADDED MODULAR A. ADDED SH2 B. ADDED NOTE 2	01895-07		REGA			SCALE
R	6-4-06	BJN	EJH	RELEASED TO PRODUCTION	01895-07	EJH	REGA			PART NO.
REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH	STPCHAAMB**
										DRAWING NO.
										01895-07 SHEET 1 OF 2

THIRD ANGLE
PROJECTION

DRAWN BY
BJN

DATE
6-4-06

CHK'D
EJH

PANDUITTM
CORP.
TINLEY PARK, ILL 60477

ALL DIMENSIONS ARE GIVEN IN INCHES,
UNLESS OTHERWISE SPECIFIED.
DIMENSIONAL TOLERANCES ARE:
(.X) ± (.XXX) ± .010
(.XX) ± ANGLES ±

REVIEW DRAWING NUMBERS

MAT'L

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


TX5e SHIELDED PATCH CORDS

PART NUMBER	LENGTH(MIN) ft(m)
STPCH0.5MB**	1.64ft (0.5m)
STPCH1MB**	3.28ft (1m)
STPCH1.5MB**	4.92ft (1.5m)
STPCH2MB**	6.56ft (2m)
STPCH2.5MB**	8.20ft (2.5m)
STPCH3MB**	9.84ft (3m)
STPCH4MB**	13.12ft (4m)
STPCH5MB**	16.40ft (5m)
STPCH6MB**	19.68ft (6m)
STPCH7MB**	22.97ft (7m)
STPCH8MB**	26.25ft (8m)
STPCH9MB**	29.53ft (9m)
STPCH10MB**	32.80ft (10m)
STPCH15MB**	49.21ft (15m)
STPCH20MB**	65.62ft (20m)
STPCH25MB**	82.02ft (25m)
STPCH30MB**	98.42ft (30m)
STPCH35MB**	114.83ft (35m)
STPCH40MB**	131.23ft (40m)



BOOT COLORS	** = COLOR
BLACK	BL
BLUE	BU
RED	RD
YELLOW	YL
GREEN	GR
BROWN	BR



MODEL FILENAME		SIZE
DRAWING FILENAME		A
M01895CB_DC07/00E		
TX5e SHIELDED PATCH CORDS (CM/LSZH) CUSTOMER DRAWING		
 PANDUIT ™ CORP. TINLEY PARK, ILL 60477		I.I. NUMBER
		PRODUCT SPEC/ PKG SPEC
 ALL DIMENSIONS ARE GIVEN IN INCHES, UNLESS OTHERWISE SPECIFIED. DIMENSIONAL TOLERANCES ARE: (.X) ± (.XXX) ± .010 (.XX) ± ANGLES ±		ASSY METHOD/ TEST METHOD
DRAWN BY BJN		SCALE NONE
DATE 6-4-06		PART NO. STPCHAAMB**
CHK'D EJH		DRAWING NO. A 01895-07 SHEET 2 OF 2

4	5-13-10	BJN		SEE SHEET 1 FOR REVISIONS	01895-07				
3	3-4-10	BJN	KAA	SEE SHEET 1 FOR REVISIONS	01895-07		PBD		
2	5-9-08	BJN	EJH	SEE SHEET 1 FOR REVISIONS	01895-07		REGA		
1	4-23-07	BJN	EJH	SEE SHEET 1 FOR REVISIONS	01895-07		REGA		
REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[STPCH1.5MBBL](#) [STPCH1MBBL](#) [STPCH3MBBL](#) [STPCH1MBGR](#) [STPCH10MBRD](#)