





CUSTOMER DRAWING

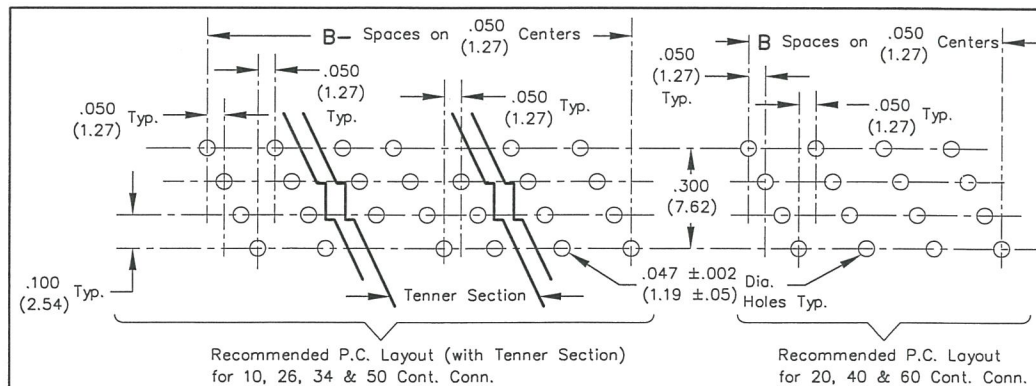

CWR-142-XX-0000

1. Dimensions are in inches; dimensions in () are in millimeters.
2. Metric equivalents are given for general information only, and are based upon 1.00 inches equals (25.4) millimeters.
3. Unless otherwise specified, tolerance are ± 0.005 (± 0.13) for three place decimals, and ± 0.01 (± 0.3) for two place decimals.

PLASTIC PARTS - UL94V-0 Thermoplastic (blue, standard)
flame retardant.

CONTACTS - Phosphor bronze, standard;

CONTACT PLATING- .000010 Gold over .000050
Nickel, Std.

TEMPERATURE RATING - 120°C.
CONTACT RATING - 1 Ampere.
DIELECTRIC STRENGTH - Over 500 V.D.C. AT SEA LEVEL.
CONDUCTORS ACCEPTED - 28-30 AWG solid or stranded.

MASTER

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[CW Industries:](#)

[CWR-142-10-0000](#) [CWR-142-60-0000](#)