



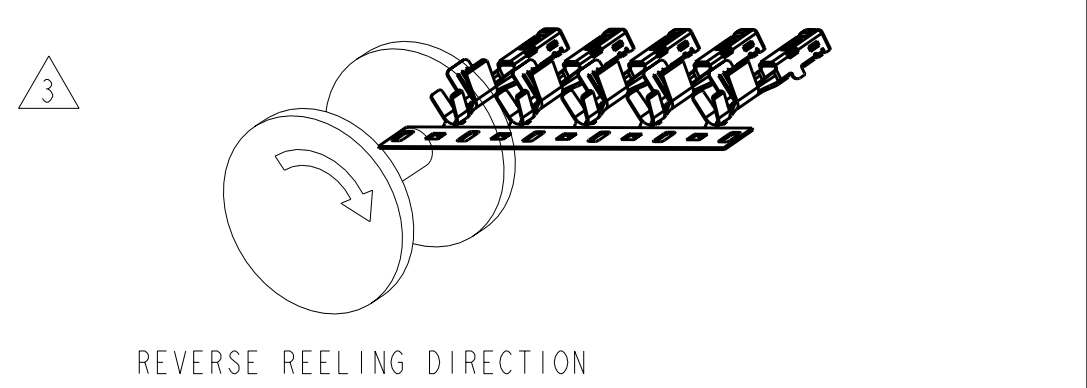

4. QUALIFICATION OF THE CRIMP APPLICATION TOOLING SHALL BE CONTROLLED BY THE REQUIREMENTS ESTABLISHED UNDER USCAR 21.
5. LOOSE END SPLICING TO BE USED.

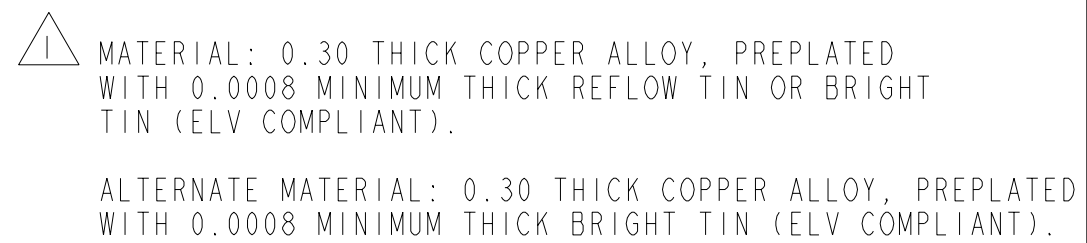

|         |                                      |     |      |      |     |      |      |           |             |
|---------|--------------------------------------|-----|------|------|-----|------|------|-----------|-------------|
| 3       | 1326032-6 REELED FOR AMP APPLICATORS |     |      |      |     |      |      | 12 AWG    | 1-1326032-2 |
|         | 1326032-5 REELED FOR AMP APPLICATORS |     |      |      |     |      |      | 14 AWG    | 1-1326032-1 |
|         | 1326032-4 REELED FOR AMP APPLICATORS |     |      |      |     |      |      | 16 AWG    | 1-1326032-0 |
|         | 1326032-3 REELED FOR AMP APPLICATORS |     |      |      |     |      |      | 18 AWG    | 1326032-8   |
|         | 1326032-2 REELED FOR AMP APPLICATORS |     |      |      |     |      |      | 20 AWG    | 1326032-8   |
|         | 1326032-1 REELED FOR AMP APPLICATORS |     |      |      |     |      |      | 22 AWG    | 1326032-7   |
| 2       | 1.35                                 | 6.8 | 4.30 | 6.09 | 4.7 | 2.70 | 5.25 | 12 AWG    | 1326032-6   |
|         | 1.35                                 | 6.5 | 4.30 | 5.62 | 3.9 | 1.70 | 3.88 | 14 AWG    | 1326032-5   |
|         | 1.10                                 | 5.6 | 3.80 | 4.54 | 3.9 | 1.70 | 3.88 | 16 AWG    | 1326032-4   |
|         | 1.10                                 | 5.6 | 3.80 | 4.54 | 3.3 | 1.30 | 2.76 | 18 AWG    | 1326032-3   |
|         | 0.90                                 | 5.0 | 3.40 | 4.11 | 3.3 | 1.30 | 2.76 | 20 AWG    | 1326032-2   |
|         | 0.90                                 | 5.0 | 3.40 | 4.11 | 2.5 | 0.90 | 2.11 | 22 AWG    | 1326032-1   |
| REELING | N                                    | L   | ØK   | J    | H   | ØF   | E    | WIRE SIZE | PART NO.    |

|                                                                                                   |  |                                                                                                                       |  |                                                                                                       |  |
|---------------------------------------------------------------------------------------------------|--|-----------------------------------------------------------------------------------------------------------------------|--|-------------------------------------------------------------------------------------------------------|--|
| THIS DRAWING IS A CONTROLLED DOCUMENT.                                                            |  | DWN<br><b>D. STRAUSSER</b> 28APR99<br>CHK<br><b>D. BROWN</b> 28APR99<br>APP'D<br><b>D. BROWN</b> 28APR99              |  |  TE Connectivity |  |
| DIMENSIONS:<br>mm                                                                                 |  | TOLERANCES, UNLESS<br>OTHERWISE SPECIFIED:<br>0 PLC ±<br>2 PLC ±0.3<br>2 PLC ±0.10<br>2 PLC ±<br>2 PLC ±<br>ANGLES ±° |  | NAME<br>2.8mm RECEPTACLE, SEALED                                                                      |  |
|              |  | PRODUCT SPEC<br>SAE/J1507-2 8/97<br>APPLICATION SPEC<br>114-13013                                                     |  | SIZE CAGE CODE DRAWING NO<br>A1 00779 C=1326032                                                       |  |
| MATERIAL<br> |  | FINISH<br>                       |  | RESTRICTED TO<br>-                                                                                    |  |
|                                                                                                   |  | CUSTOMER DRAWING                                                                                                      |  | SCALE 10: SHEET 1 OF 1 REV E                                                                          |  |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-1326032-2](#)