


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	STUD SIZE		DIMENSIONS in. [mm]					CA9 SERIES CRIMP DIE	CA-800(EZ) SERIES CRIMP DIE
	ENGLISH	METRIC	L ± .03 [0,8]	W ± .01 [0,3]	C ± .02 [0,5]	M ± .03 [0,8]	H ± .01 [0,3]		
PMV1-3FB-3K	--	M3	.78 [19,8]	.23 [5,8]	.20 [5,1]	.64 [16,3]	.13 [3,3]	CD9-1A	CD-800-1
PV18-6FB-3K	#6	M3,5	.78 [19,8]	.30 [7,6]	.20 [5,1]	.64 [16,3]	.15 [3,8]		
PV18-6FNB-3K	#6	M3,5	.78 [19,8]	.25 [6,4]	.20 [5,1]	.64 [16,3]	.15 [3,8]		
PV18-8FB-3K	#8	M4	.84 [21,3]	.32 [8,1]	.23 [5,8]	.68 [17,2]	.17 [4,3]		
PV18-10FB-3K	#10	--	.86 [21,8]	.35 [8,9]	.25 [6,4]	.70 [17,8]	.20 [5,1]		
PV18-10FNB-3K	#10	--	.86 [21,8]	.31 [7,9]	.25 [6,4]	.70 [17,8]	.20 [5,1]		
PMV1-5FB-3K	--	M5	.86 [21,8]	.35 [8,9]	.25 [6,4]	.70 [17,8]	.20 [5,1]		
PV18-14FB-3K	1/4"	M6	1.03 [26,2]	.44 [11,2]	.33 [8,4]	.78 [19,9]	.27 [6,9]		

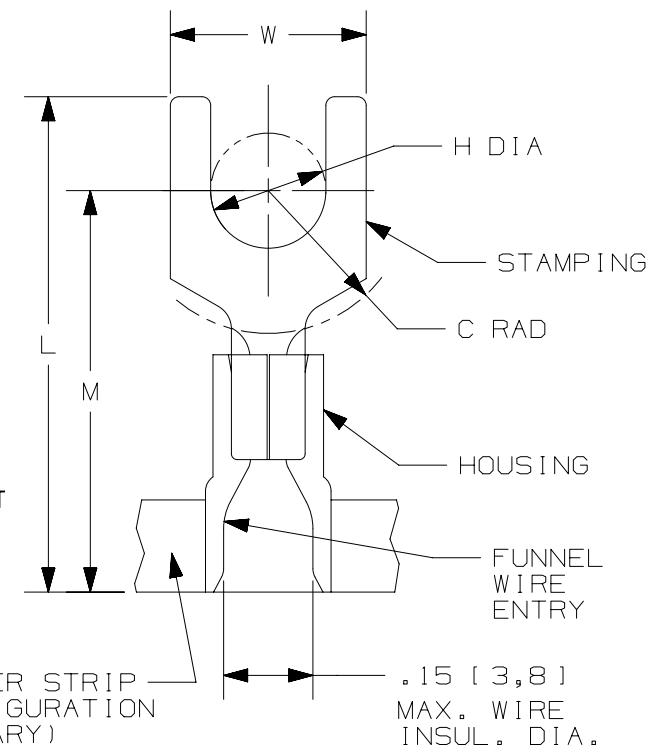

PRESS/APPLICATOR COMPATIBILITY CHART

PRESS	CP-871	CP-861
APPLICATOR	CA9 CA-800EZ	CA-800


NOTES :

1. UL LISTED AND CSA CERTIFIED FOR:
A. #22-18 AWG [0,5-1,0 mm²] SOLID OR STRANDED COPPER WIRE
B. 221°F [105°C] MAX. OPERATING TEMPERATURE
C. 600 V. MAX. VOLTAGE RATING


CARRIER STRIP -
(CONFIGURATION
MAY VARY)

2. SEE www.panduit.com FOR PACKAGE QUANTITIES
3. MATERIAL:
A. STAMPING: .03" [0,8] THK COPPER, TIN PLATED
B. HOUSING: VINYL, RED
4. DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

5. WIRE STRIP LENGTH: $1/4'' \begin{smallmatrix} +1/32 \\ -0 \end{smallmatrix}$ [6, 4mm $\begin{smallmatrix} +0,8 \\ -0 \end{smallmatrix}$]

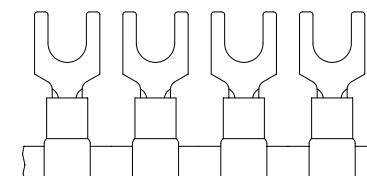

08	1/17	TMR	TMR	RGB	ADMINISTRATIVE CHANGE SEE ECN	N41081BA-A41081
07	12/16	TMR	TMR	RGB	REVISED CERTIFICATION, C DIM TOL WAS .015	N41081BA-A41081
06	12/16	TMR	TMR	RGB	NONE, UPDATE TO REV 7	N41081BA-A41081
05	07/14	MBY	JHNU	RGB	REVISED NOTES, MOVED TOOLS TO TABLE, REVISED CERTIFICATION	N41081BA-A41081
04	09.17.12	JBN	LCA	VMB	ADDED METRIC EQUIVALENT. REVISED NOTES. UPDATED DRAWING TO CURRENT STANDARDS.	A41081
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

TITLE						FORK TERMINALS, 2 PC. VINYL INSULATED, #22-18, CONTINUOUS REEL					
						CUSTOMER DRAWING					
ITEM REVISION NAME						N41081BA/08 					
DATASET FILE NAME						N41081BA_DC/08A					
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .X ± .XXX ± .XX ± ANGLES ±						MATERIAL: SEE NOTES					
 THIRD ANGLE PROJECTION						DRAWING NUMBER: A41081					
DRAWN BY		DATE		CHK		SCALE				SIZE	
DSM		-		FS		N.T.S.		SHT 1 OF 1		A	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[PV18-8FB-3K](#) [PV18-10FB-3K](#) [PV18-6FNB-3K](#) [PV18-6FB-3K](#)