

# HFA

## 1/4" x 1 1/4" in-line water-resistant fuse holder



### Product features

- For 1/4" x 1-1/4" (6.35mm x 31.8mm) fuses
- IP64 rating for exposed locations
- Accepts #16 to #12 copper wire
- Copper crimp lead material
- Recommended crimp tools:
  - Thomas & Betts – ERG4002
  - Channellock No. 909
  - Thomas & Betts WT-112M
- High temperature, flame retardant, phenolic meets UL 94 HB
- Crimp or 1/4" quick connect terminals
- In-line connection

### Agency information

- UL Recognized: (IZLT2, E14853) HFA recognized with use of No. 12 AWG copper conductors secured with Thomas & Betts crimping tool WT-112M
- HFA-HH not UL Recognized

| PACKAGING CODE |   |
|----------------|---|
| Packaging Code | Description                                   |
| Blank          | 10 pieces of fuseholders packed into a carton |
| BK             | 20 pieces of fuseholders packed into a carton |

| OPTION CODE |                        |
|-------------|------------------------|
| Option Code | Description            |
| -R          | RoHS compliant version |

### Ordering

- Specify packaging, product, and option code



### Environmental data

- Temperature Rating (RTI): 150 °C
- IP64 rating for exposed locations

| SPECIFICATIONS |                |                |                   |
|----------------|----------------|----------------|-------------------|
| Product Code   | Voltage Rating | Current Rating | Terminal          |
| HFA            | 250V           | 20A            | Crimp             |
| HFA-HH         | 250V           | 20A            | 1/4 Quick Connect |

### Dimensions

Drawing Not to Scale

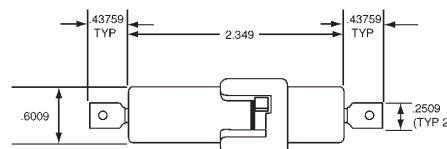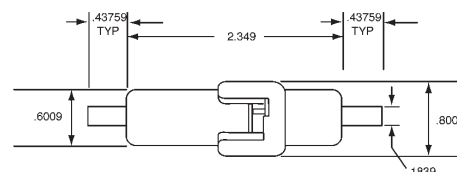

| Component | Material           |
|-----------|--------------------|
| Body      | Phenolic           |
| Crimp     | Copper, Tin-Plated |

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

**Eaton**  
Electronics Division  
1000 Eaton Boulevard  
Cleveland, OH 44122  
United States  
www.eaton.com/electronics

© 2018 Eaton  
All Rights Reserved  
Printed in USA  
Publication No. 2115  
March 2018

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Eaton:](#)

[BK/HFA](#) [HFA-HH](#) [BK/HFA-HH-R](#) [BK/HFA-R](#) [HFA-HH-R](#) [HFA-1K0225](#) [HFA-R](#) [HFA-1K0967](#) [BK-HFA-1K0117](#)  
[BK/HFA-1K0117](#)