
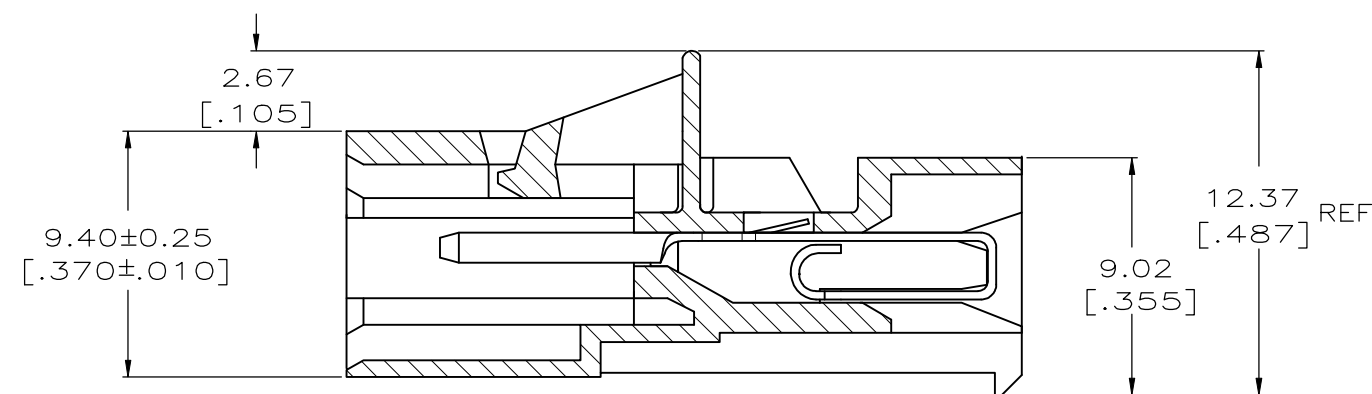
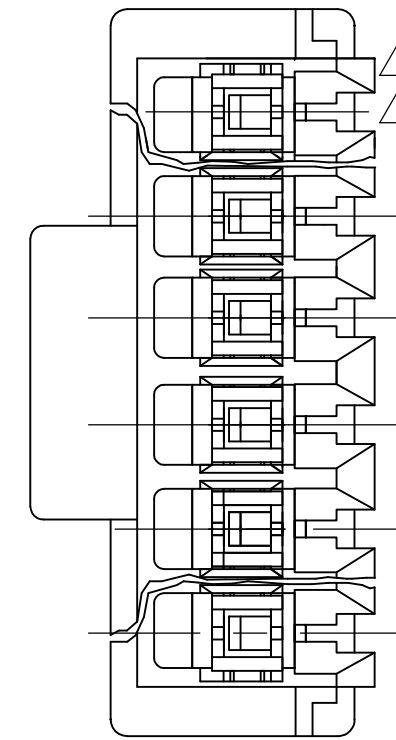
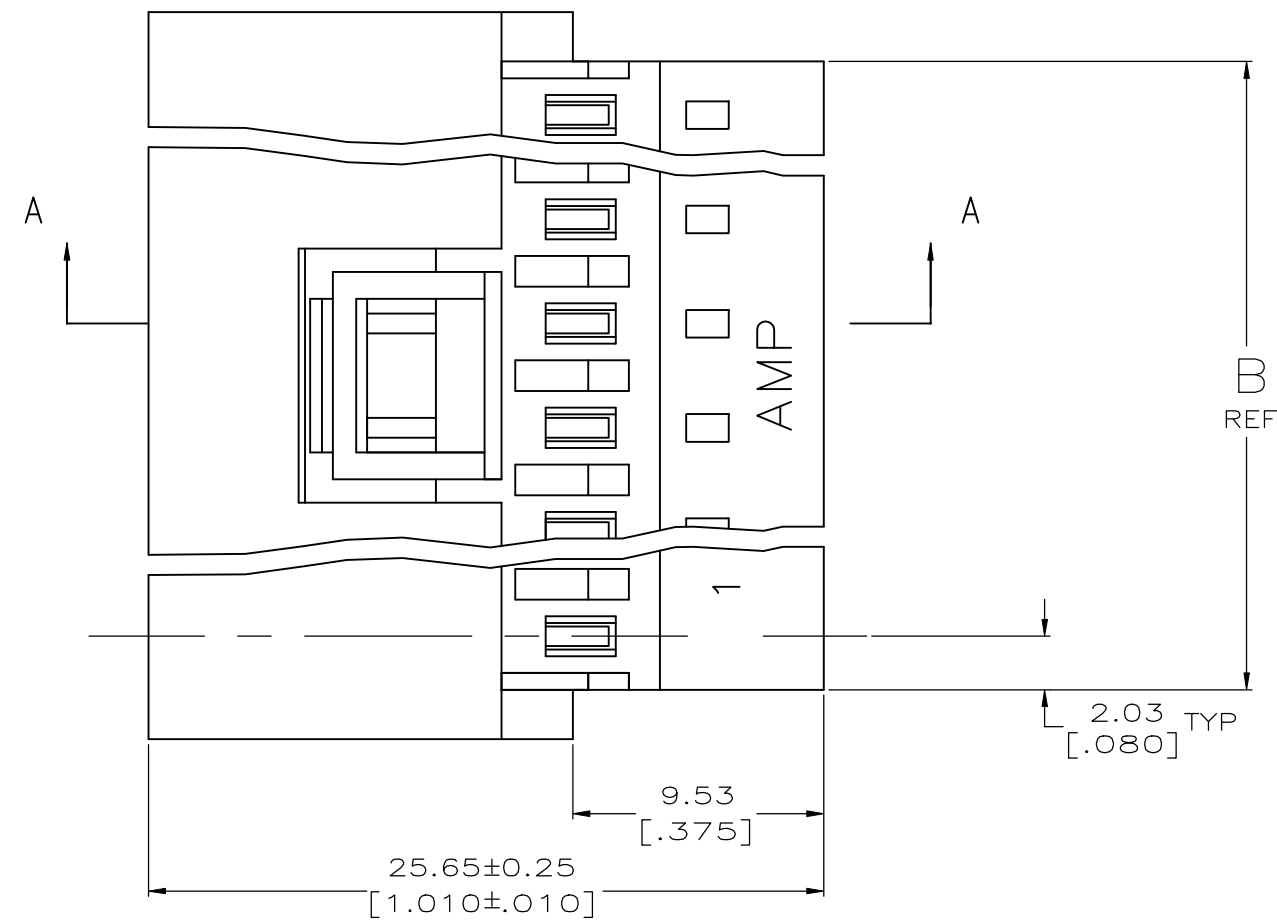


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION

© COPYRIGHT - By - TE CONNECTIVITY ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS					
CM	0	P	LTR	DESCRIPTION	DATE	DWN	APVD
			H3	REVISED PER ECR-17-018328	10JAN2018	BDA	SG

- 1 MATERIAL: CONNECTOR- NYLON UL94V-2 (YELLOW).
CONTACTS- 0.30 [.012] THK COPPER ALLOY
(BRIGHT TIN-LEAD 0.00203 [.000080] MIN THK).
(MATTE TIN 0.00203 [.000080] MIN THK
FOR CONTACTS 3-641436-2 THRU 5-641436-4)
- 2 CONTACTS ACCEPT #20 AWG SOLID, FUSED STRANDED
OR STRANDED (7 STRANDS) WIRE WITH 2.41 [.095] MAX
INSULATION DIA.
- 3 BOW, IN ANY DIRECTION, NOT TO EXCEED 0.15 [.006] PER IN.
- 4 HOUSING FEATURES: CLOSED END.
- 5 DIMENSIONS IN BRACKETS ARE IN INCHES.
- 6 NOTE DELETED.
- 7  OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- 8  OBSOLETE PARTS

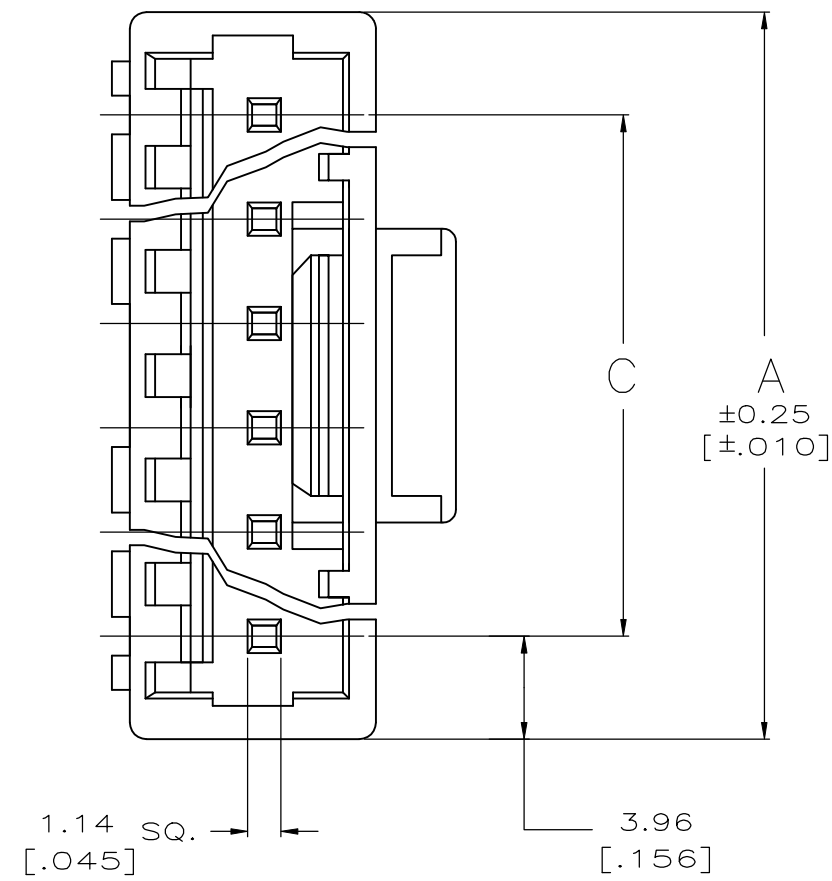

7	SUPERSEDED
7	SUPERSEDED
	OBSELETE
	SUPERSEDED
	SUPERSEDED
8	SUPERSEDED
	SUPERSEDED
	SUPERSEDED

		91.14	[3.588]	95.20	[3.748]	99.06	[3.900]	24	5-641436-4
		55.47	[2.184]	59.54	[2.344]	63.40	[2.496]	15	4-641436-5
		43.59	[1.716]	47.65	[1.876]	51.51	[2.028]	12	4-641436-2
		31.70	[1.248]	35.76	[1.408]	39.62	[1.560]	9	3-641436-9
		19.81	[.780]	23.88	[.940]	27.74	[1.092]	6	3-641436-6
		11.89	[.468]	15.95	[.628]	19.81	[.780]	4	3-641436-4
		7.92	[.312]	11.99	[.472]	15.85	[.624]	3	3-641436-3
		3.96	[.156]	8.03	[.316]	11.89	[.468]	2	3-641436-2
CD		91.14	[3.588]	95.20	[3.748]	99.06	[3.900]	24	2-641436-4
CD		55.47	[2.184]	59.54	[2.344]	63.40	[2.496]	15	1-641436-5
CD		43.59	[1.716]	47.65	[1.876]	51.51	[2.028]	12	1-641436-2
CD		31.70	[1.248]	35.76	[1.408]	39.62	[1.560]	9	641436-9
CD		19.81	[.780]	23.88	[.940]	27.74	[1.092]	6	641436-6
CD		11.89	[.468]	15.95	[.628]	19.81	[.780]	4	641436-4
CD		7.92	[.312]	11.99	[.472]	15.85	[.624]	3	641436-3
CD		3.96	[.156]	8.03	[.316]	11.89	[.468]	2	641436-2
	FINISH	C		B		A		NO. OF CIRCUITS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: K. SALMON 10-22-91 CDR: R. SWING 10-22-91 APPD: _____		 TE Connectivity	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± — 1 PLC ± — 2 PLC ± 0.13 [0.005] 3 PLC ± — 4 PLC ± — ANGLES ± —		NAME: _____ MTA 156 POSTED CONNECTOR ASSEMBLY, 20 AWG	
		PRODUCT SPEC: _____ APPLICATION SPEC: _____		SIZE: _____ CASE CODE: _____ DRAWING NO: _____ RESTRICTED TO: _____	
MATERIAL: SEE NOTE 1		FINISH: SEE NOTE 1		WEIGHT: _____ A1 00779 © 641436	
CUSTOMER DRAWING					
		SCALE: 5:1		SHEET 1 of 1 REV H.3	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-641436-6](#)