
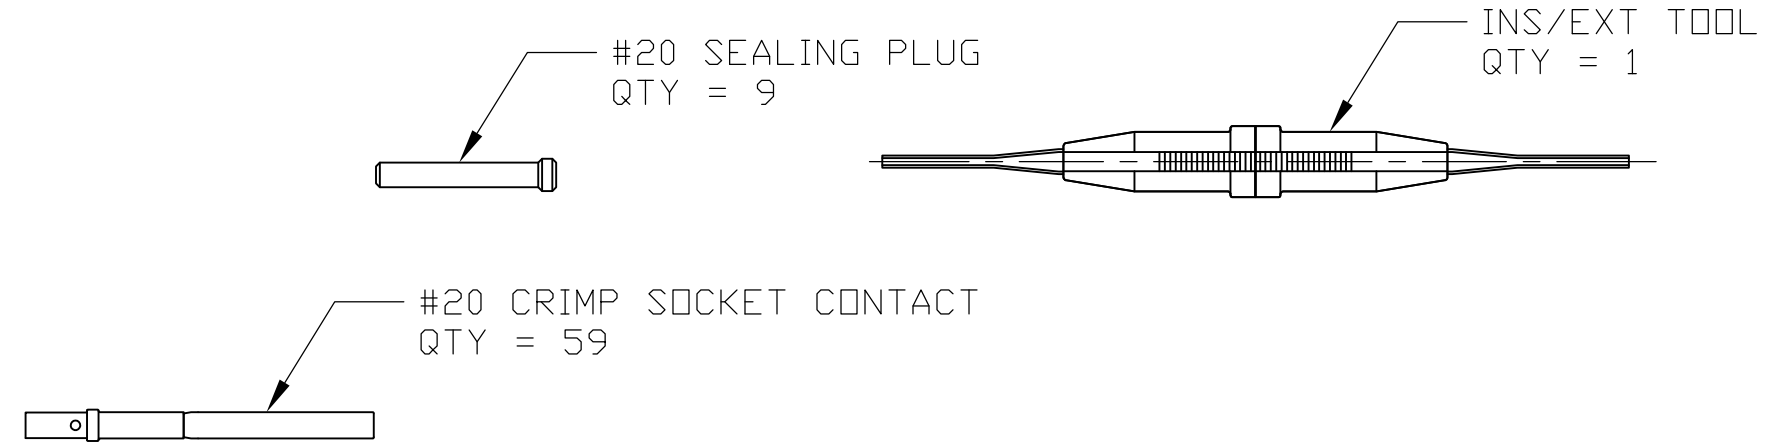
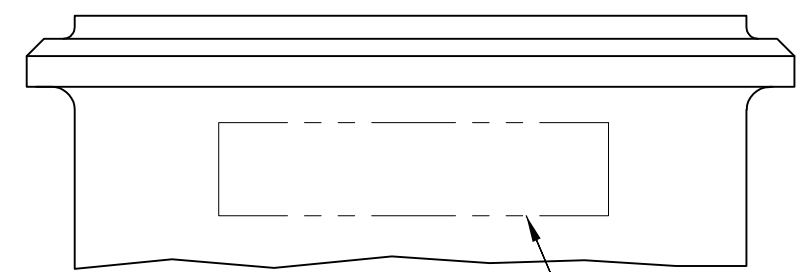
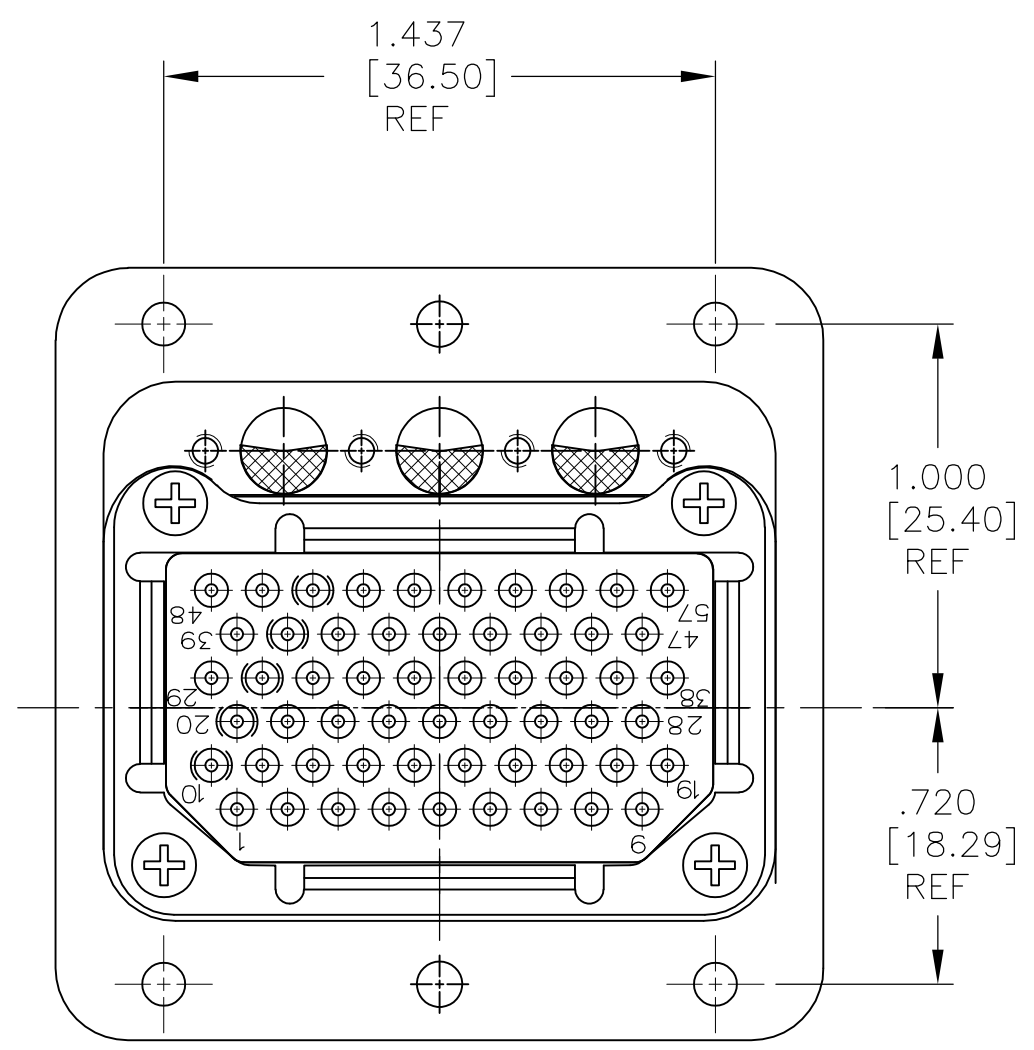
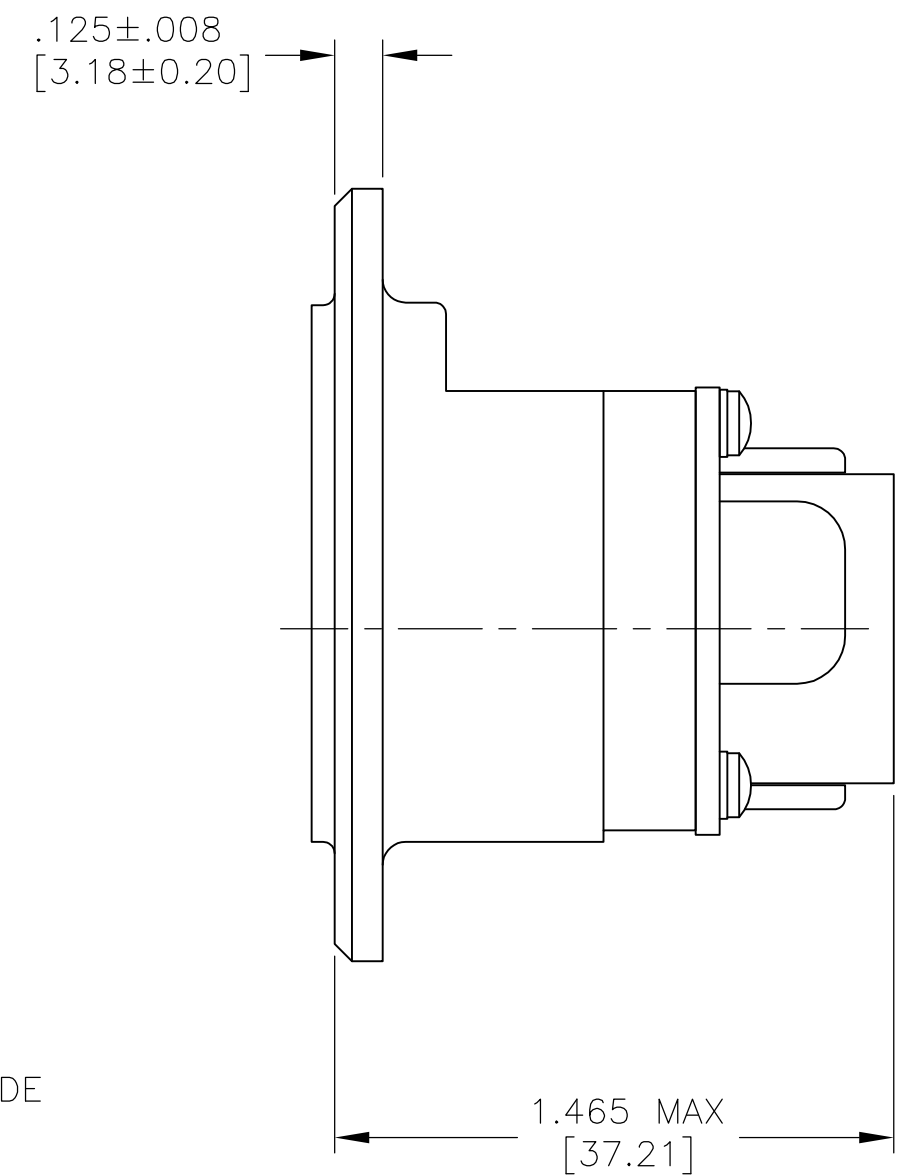


- 1
- 2
- TE PART NO. AND DESCRIPTIVE PART NO. MARKED IS THESE AREAS.
- "AMP" AND DATE CODE MARKED IN THIS AREA.
3. KEYING ASSEMBLED IN THE "01" POSITION.
4. MATERIAL AND FINISH:
SHELL: DIE CAST ALUMINUM ALLOY PER FED. SPEC QQ-A-591.
STANDARD FINISH: CADMIUM PLATE PER QQ-P-416, TYPE I,
CLASS 2 YELLOW CHROMATE CONVERSION.
INSERT RETENTION PLATE: ALUMINUM ALLOY, BLUE ANODIZE
PER MIL-A-8625.
SCREWS AND WASHERS: STAINLESS STEEL, PASSIVATED.
POLARIZING POSTS: STAINLESS STEEL, PASSIVATED.
POLARIZING NUTS: BRASS, CADMIUM PLATED.

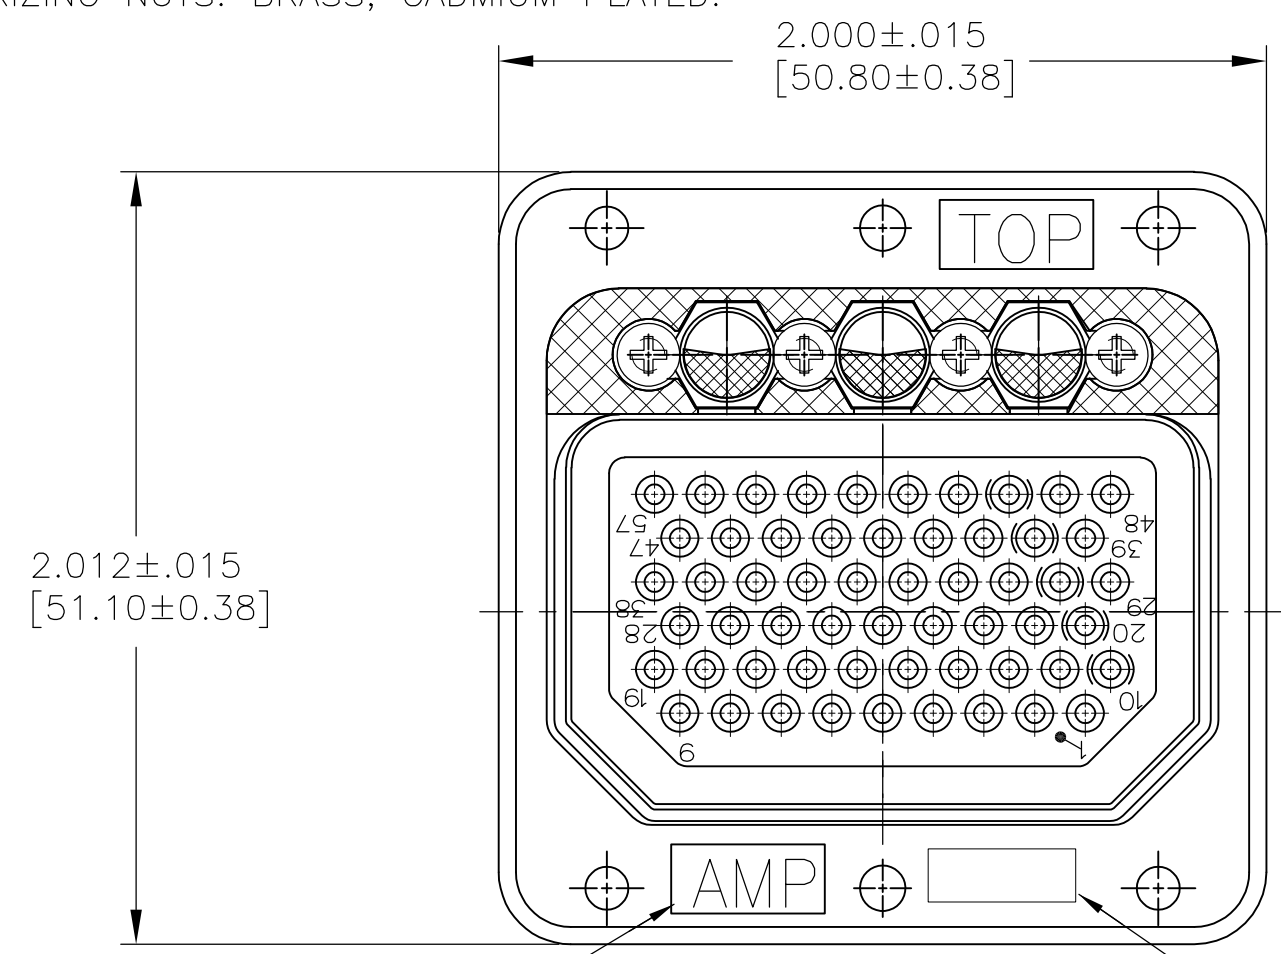

1218639-1

PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.C.THOMAS 3-13-14	TE Connectivity		
DIMENSIONS: INCHES [mm]		CHK D.EABY 3-13-14			
		APVD D.EABY 3-13-14		NAME CONN ASSY,ARINC 404,MME1R57S-0001 (204)	
		PRODUCT SPEC		SIZE A2	
MATERIAL —		FINISH —		CAGE CODE 00779	
		WEIGHT —		DRAWING NO C=1218639	
		CUSTOMER DRAWING		RESTRICTED TO —	
		SCALE 2:1		SHEET 1 of 1	
				REV A	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1218639-1](#)