




DIMENSIONS

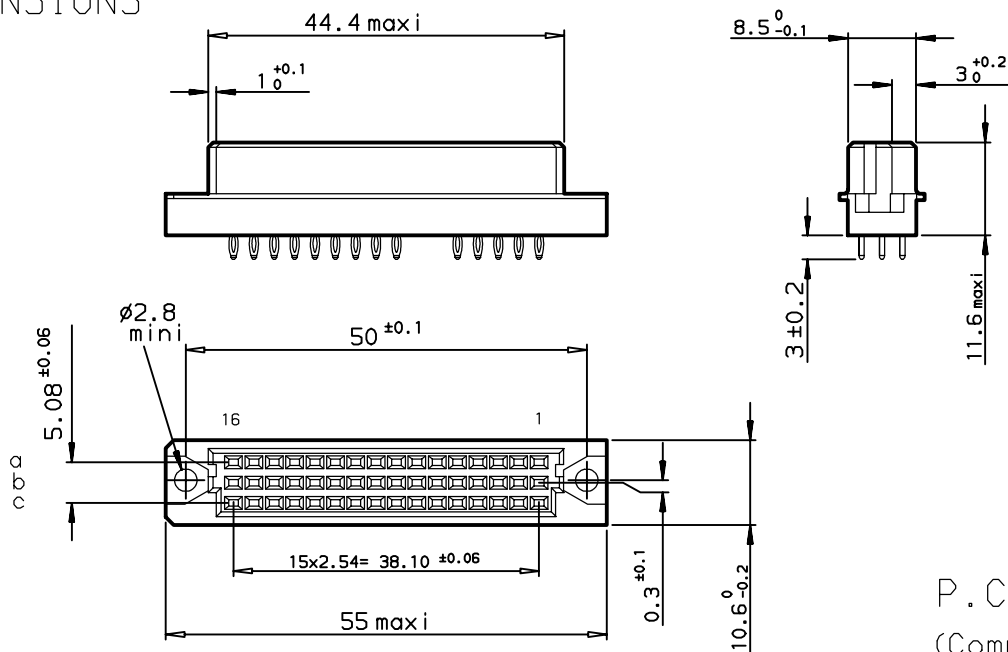

METHOD OF INSERTION
ON THE PCB = FLAT ROCK



P.C. CARD DRILLING
(Component side view)

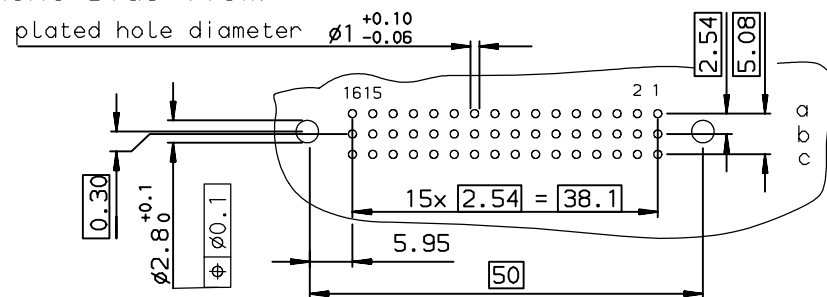

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C-8609-0000C

SPECIFICATION 759 = no contact in position : row:a-b-c cavities 6-7
OR SPECIFICATION CI =

European Views

rev	ecn no	dr	date
A	-	ROU	1998/03/06
B	LS05-004	JTA	2005/02/26
C	LS06-0095	LGO	2006/06/24
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com			surface ISO 1302		tolerance std ISO 406 ISO 1101		projection 		mm 		
			TOLERANCES UNLESS OTHERWISE SPECIFIED								
Dr	ROUILLARD	1998/03/06	ANGULAR	LINEAR	0.X	±0.1	size A3	Scale 1.5			
Eng	TARON	1998/03/06			0.XX	±0.1					
Chr	LEGARE	1998/03/06			0.XX' ±2'	0.XXX					±0.1
Appr	LEGARE	1998/03/06	Product family				DIN 8609	Spec ref -			
			title STANDARD FEMALE 3 ROW 42 CONTACTS				dwg no C-8609-0695		Rev. C		
			catalog no				-	CUSTOMER		sheet 1 of 1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[86093428394750CILF](#)