

REV. C
DCO 300855


TOLERANCES ±.010" - UNLESS OTHERWISE SPECIFIED

COIL: @ 25°C
RESISTANCE _____ 320 OHMS ±10%
NOMINAL VOLTAGE _____ 28 VDC
MUST OPERATE _____ 13.5 VDC MAX.
_____ TRANSIENT SUPPRESSION - 42 VDC MAX.
MUST RELEASE _____ 5.5 VDC MAX., 2.3 VDC MIN.

ENVIRONMENT:
VIBRATION _____ 33 Hz TO _____ 3000 Hz @ _____ 30 g's
SHOCK _____ 200 g's _____ 6 MS. DURATION
TEMPERATURE _____ -70 °C TO _____ +125 °C

NOTES: OPERATE, RELEASE 10 MS MAX.
CONTACT BOUNCE 1 MS MAX.
CONTACT BREAK BOUNCE 0.1 MS MAX.

CUSTOMER DATA SHEET

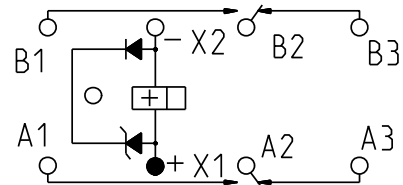

TERMINAL VIEW

CONTACT RATING: _____
10 AMPS 28 VDC, 115 VAC 400 Hz RESISTIVE.
100,000 OPERATIONS

DR. B.D. 07MAR2008 CK. J.M.B. 5/14/08

Tyco Electronics ©COPYRIGHT 2005
TYCO ELECTRONICS CORPORATION
ALL INTERNATIONAL RIGHTS RESERVED

CUST. _____ CATALOG ITEM
CUST. NO. _____ REV. _____

TE NUMBER
9-1617751-2

CII PART NUMBER
FCA-210-BZ4

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[FCA-210-BZ4](#)