


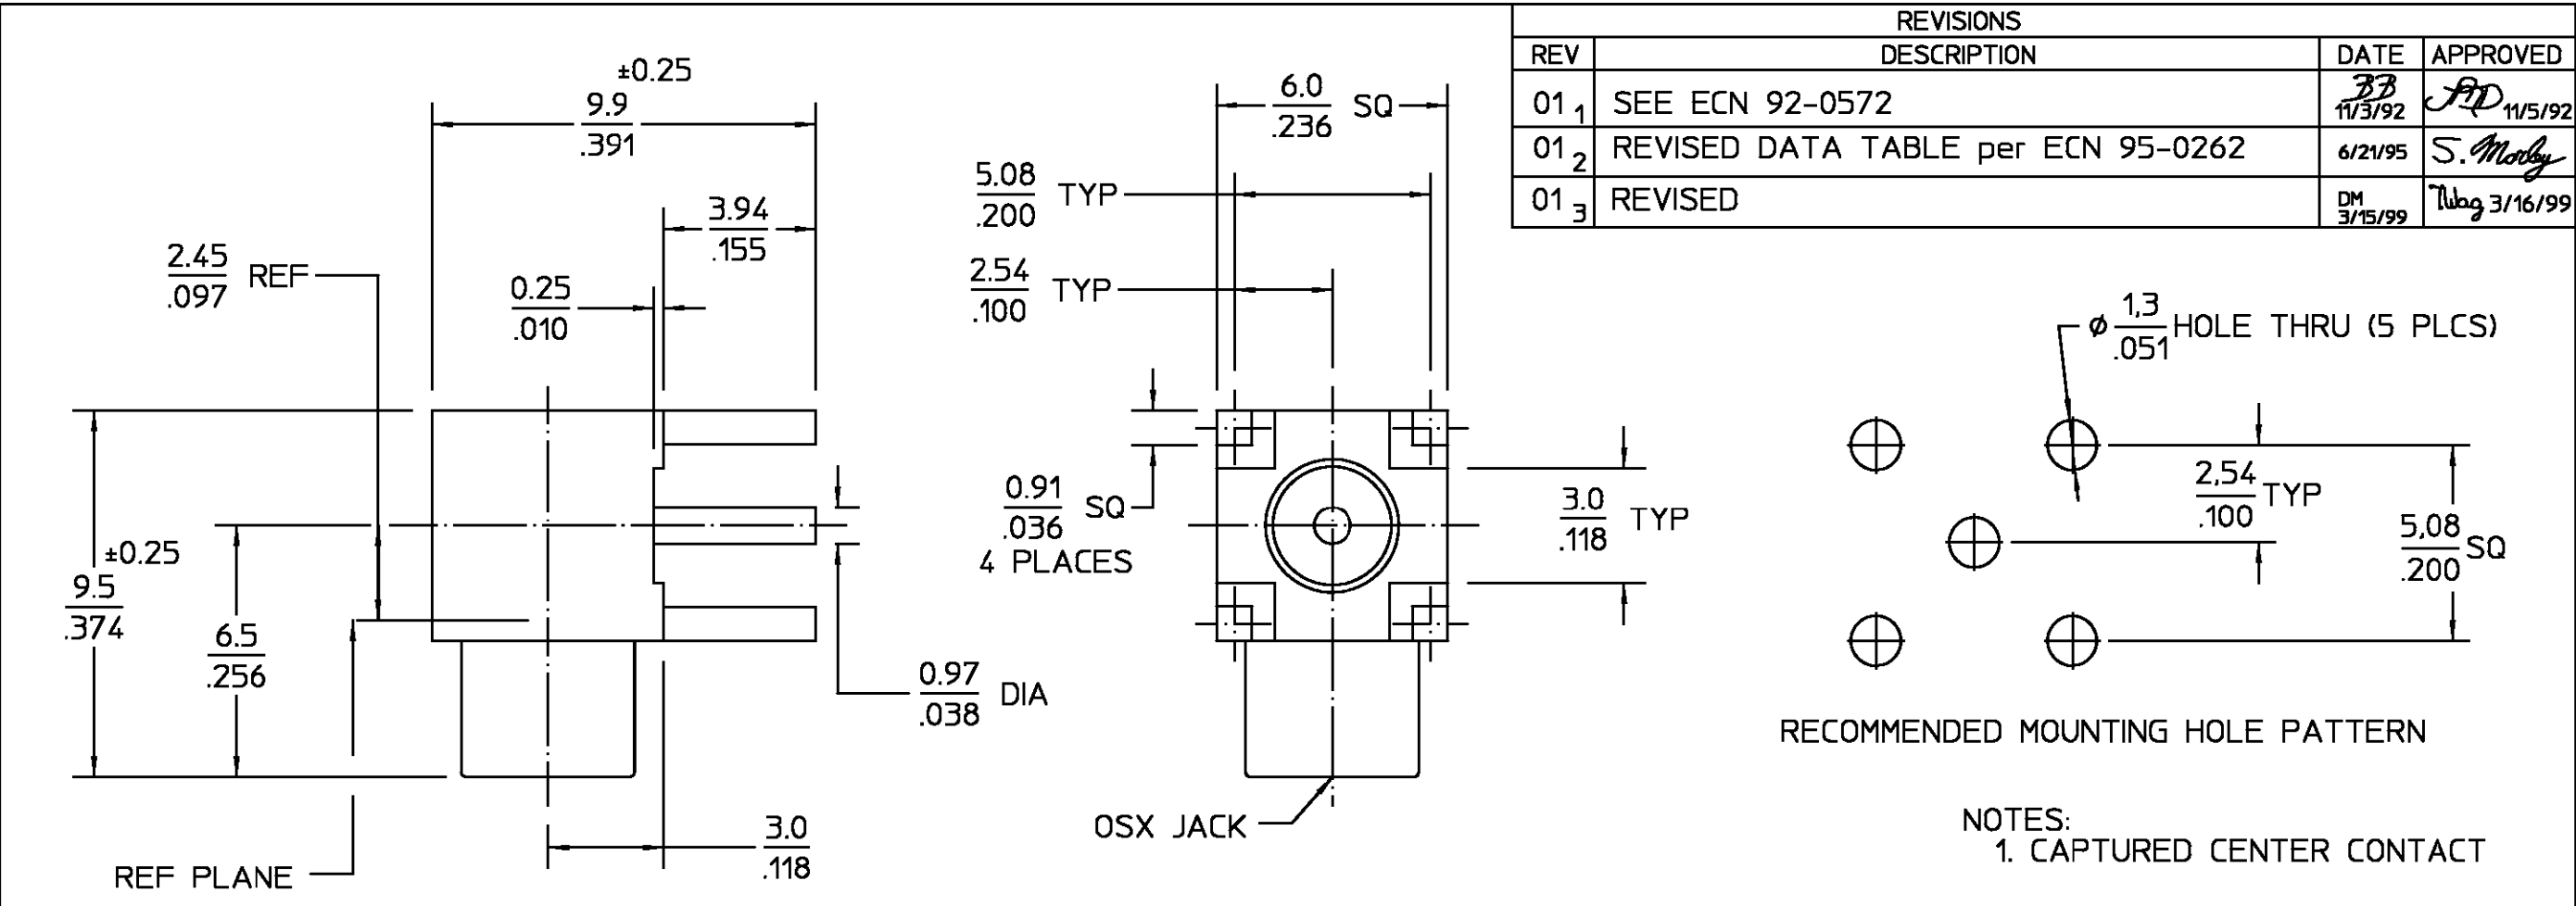

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
01 ₁	SEE ECN 92-0572	11/3/92	AP 11/5/92
01 ₂	REVISED DATA TABLE per ECN 95-0262	6/21/95	S. Morley
01 ₃	REVISED	DM 3/15/99	Wag 3/16/99

ELECTRICAL	MECHANICAL	ENVIRONMENTAL	HOUSING CAP	BRASS PER ASTM-B-16 HALF HARD	NICKEL PLATE PER QQ-N-290
Nominal Impedance (Ohms) 50	Force to Engage: (Lbs) 3.4 MAX	Temperature Rating -65° to +165°C	DIELECTRIC	TFE FLUOROCARBON PER ASTM-D-1457	N/A
Frequency Range (GHz) DC to 6.0	& Disengage: (Lbs) 1.77 MIN - 4.5 MAX	Vibration MIL-STD-202, Method 204, Condition B	CENTER CONTACT	BERYLLIUM COPPER PER ASTM B 196, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204
Volt Rating (VRMS MAX) @ Sea Level 335	Center Contact Captivation Axial (Lbs) 4.5 @ 1 minute with .006" Displacement	Thermal Shock MIL-STD-202, Method 107, Condition b	COMPONENT	MATERIAL	FINISH
VSWR 12:1 MAX		Moisture Resistance MIL-STD-202, Method 106	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCE ON DEC ANGLES ±0.13 ± 1°	DRAWN BY M.CATIZONE DATE 10-19-90 CHECKED BY M.Y. DATE 10-19-90 APP'D BY [Signature] DATE 10-19-90	AMP Incorporated 140 Fourth Avenue Waltham, MA 02451-7599
Insertion Loss .1dB MAX/1000 MHz		Corrosion - MIL-STD-202, Method 101, Condition B, 48 Hrs	These drawings and specifications are the property of AMP incorporated and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.	USE ASS'Y PROCEDURE	TITLE OSX PRINTED WIRING BOARD RIGHT ANGLE JACK RECEPTACLE STRAIGHT TERMINAL
Corona, 70,000 Ft (VRMS MIN) 250				N/A	SIZE B CODE IDENT NO. 26805 5864-5001-10 REV 01 ₃
Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level 1000	XX.XX = mm .XXX = in				SCALE 6:1 SHEET 1 OF 1
Contact Resistance (Milliohms MAX) Center Contact 5.0 Outer Contact 1.0					
RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) 670					
I.R.(Megohms MIN) 10,000					

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5864-5001-10](#)