

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0917140010

Status:


Active

Overview:

Picoflex Ribbon-Cable Connectors

Description:

1.27mm Pitch Picoflex PF-50 Header, Right Angle, High Temp, Tin (Sn) Plating, 10 Circuits, Glow Wire Capable

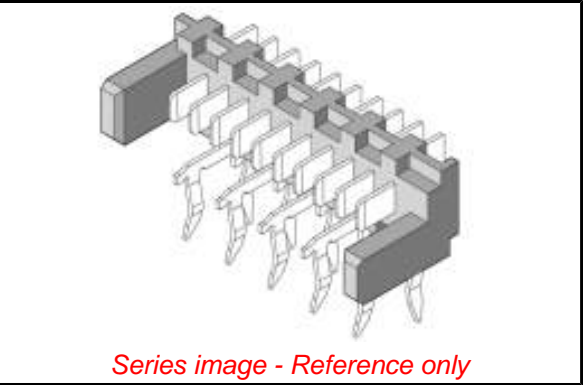

Documents:	
<a href="#">3D Model</a>	<a href="#">Product Specification PS-99020-0011 (PDF)</a>
<a href="#">Drawing (PDF)</a>	<a href="#">RoHS Certificate of Compliance (PDF)</a>

General	
Product Family	Ribbon Cable / Wire Trap Connectors
Series	91714
Comments	This Molex product is manufactured from material that has the following ratings, tested by independent agencies :. a) A Glow Wire Ignition Temperature (GWIT) of at least 775 deg C per IEC 60695-2-13.. b) A Glow Wire Flammability Index (GWFI) above 850 deg C per IEC 60695-2-12.and hence complies with the requirements set out in the International Standard IEC 60335-1 5th edition - household and similar electrical appliances - safety; section 30 Resistance to heat and fire. <P><P> The customers using this product must determine its suitability for use in their particular application through testing or other acceptable means as described in end-product glow-wire flammability test standard IEC 60695-2-11 and any applicable product end-use standard(s). <P> If it is determined during the customer's evaluation of suitability, that higher performance is required, please contact Molex for possible product options.
Component Type	PCB Header
Glow-Wire Capable	Yes
Overview	<a href="#">Picoflex Ribbon-Cable Connectors</a>
Product Name	Picoflex
UPC	800756809120
Physical	
Circuits (Loaded)	10
Circuits (maximum)	10
Color - Resin	Natural
Durability (mating cycles max)	30
Entry Angle	90° Angle
Lock to Mating Part	Yes
Material - Metal	Brass
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	1.165/g
Number of Rows	1
PCB Locator	No
PCB Retention	Yes
PCB Thickness - Recommended	1.60mm
Packaging Type	Tube
Pitch - Mating Interface	1.27mm
Pitch - Termination Interface	1.27mm
Plating min - Mating	3.048µm

EU ELV	
Not Relevant	
EU RoHS	China RoHS
Compliant	
REACH SVHC	
Not Contained Per	
-ED/01/2018 (15	
January 2018)	
Halogen-Free	
Status	
Not Low-Halogen	
Need more information on product	
environmental compliance?	
Email <a href="mailto:productcompliance@molex.com">productcompliance@molex.com</a>	
Please visit the <a href="#">Contact Us</a> section for any	
non-product compliance questions.	
China ROHS	Not Relevant
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series

91714 Series

Mates With

90327 IDT Connector

Plating min - Termination	3.048μm
Polarized to Mating Part	Yes
Polarized to PCB	No
Shrouded	Open Ends
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40°C to +105°C
Termination Interface: Style	Through Hole - Kinked Pin
Wire Insulation Diameter	N/A
Wire Size AWG	N/A
Wire/Cable Type	Ribbon Cable
<b>Electrical</b>	
Current - Maximum per Contact	2.4A
Voltage - Maximum	250V AC/DC
<b>Material Info</b>	
<b>Reference - Drawing Numbers</b>	
Product Specification	PS-99020-0011
Sales Drawing	SD-91714-001

This document was generated on 07/12/2018

PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

91714-0010