


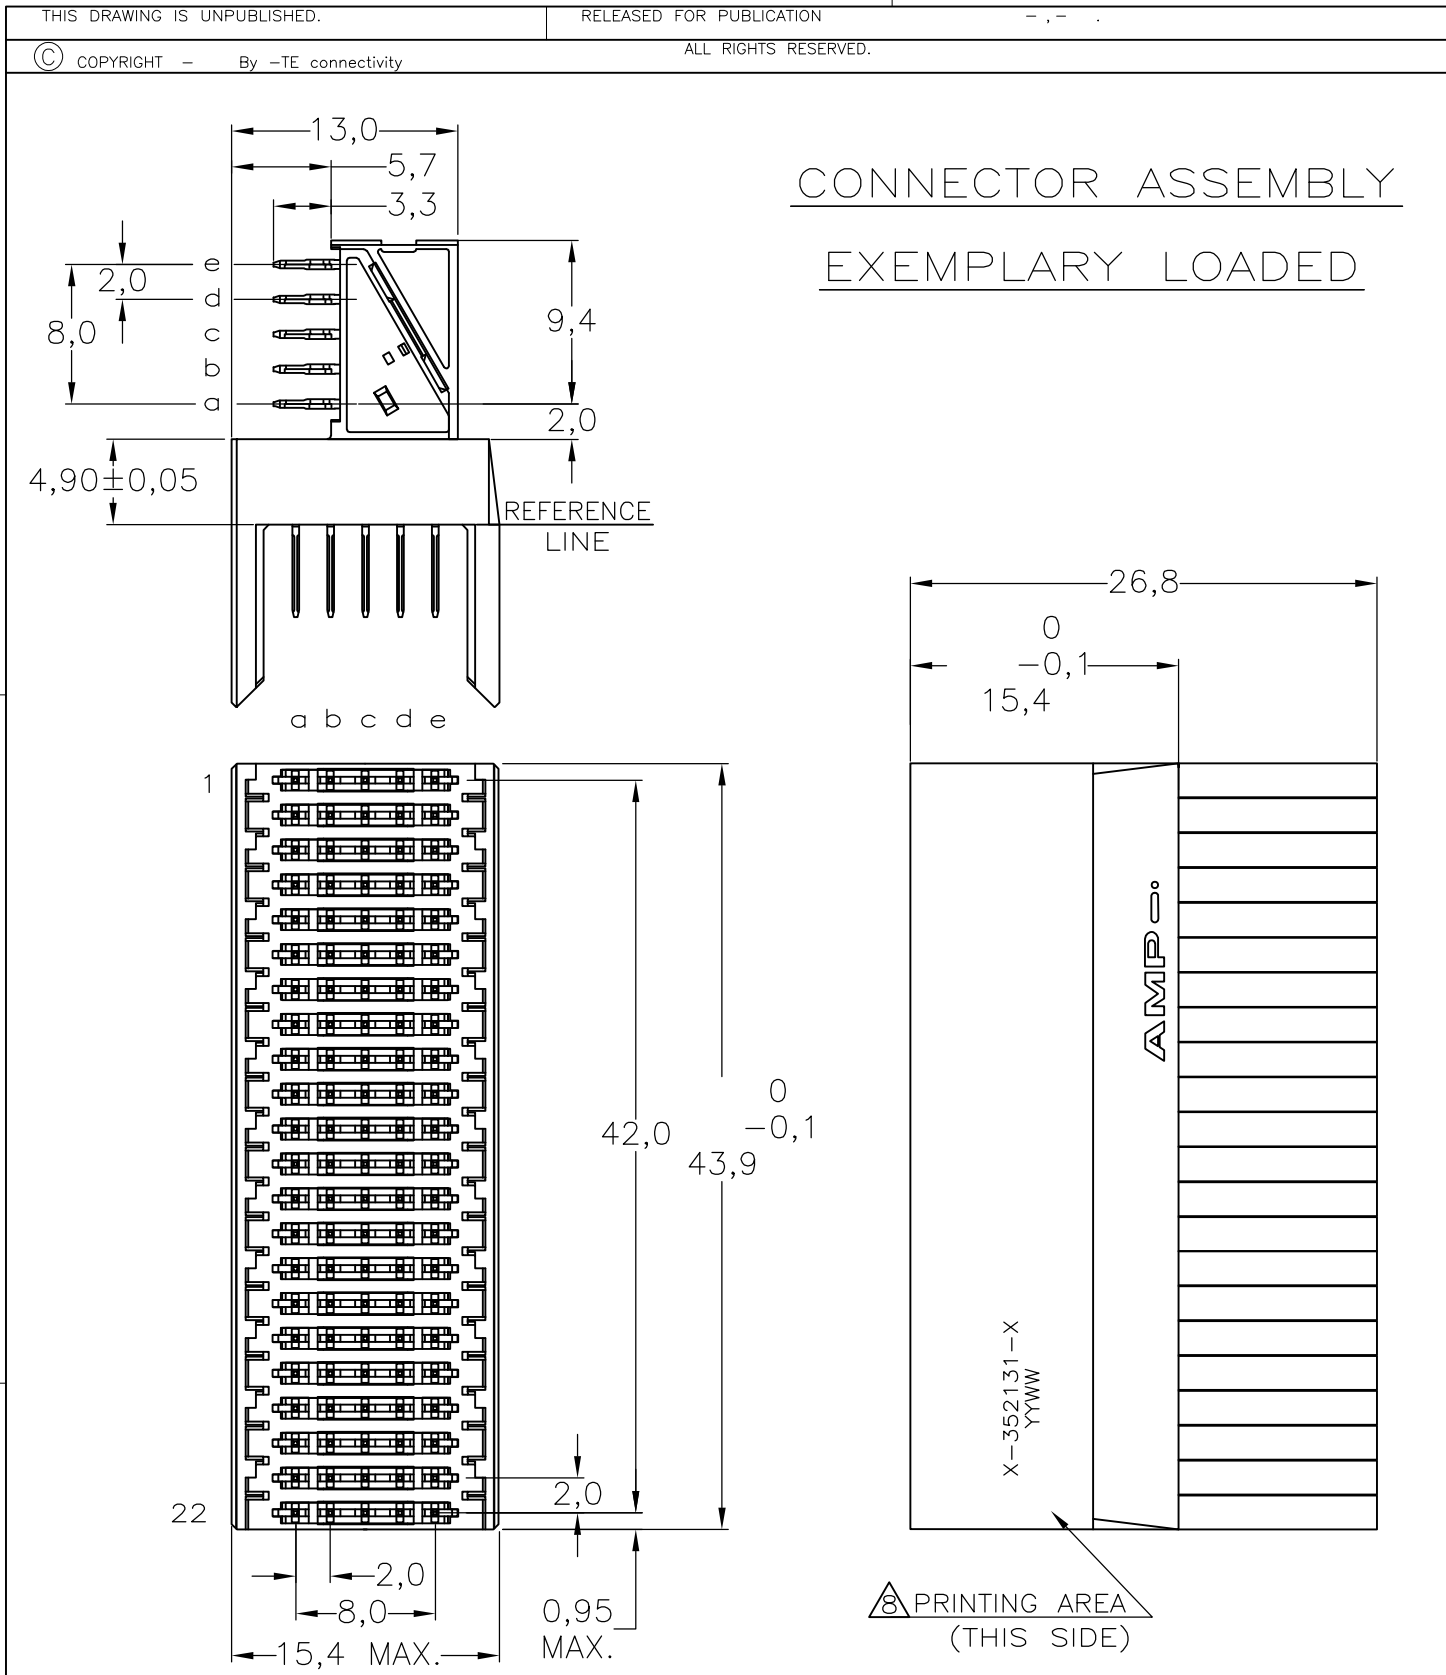



NOTES:

- 1 MATERIAL HOUSING: GREY GLASSFILLED POLYESTER
UL 94 V-0
CONTACT: PHOSPHOR BRONZE

- 2 GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1,27µm NICKEL MIN.
AND ACTION PIN: 0,5µm TIN-LEAD MIN.
FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
- 3 CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 2.
- 4 CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 1.
- 5 CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III, CENTRAL OFFICE APPLICATIONS.
- 6 CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III, UNCONTROLLED ENVIRONMENT APPLICATIONS.
- 7 CONNECTOR LUBRICATED WITH TELCORDIA GR-1217-CORE APPROVED LUBRICANT.
- 8 CONNECTOR MARKED WITH PARTNUMBER AND DATECODE
- 9 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID.

- 11 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- 12 0.76µm MIN GOLD PLATING AT MATING AREA.

CONTACT DIMENSIONS

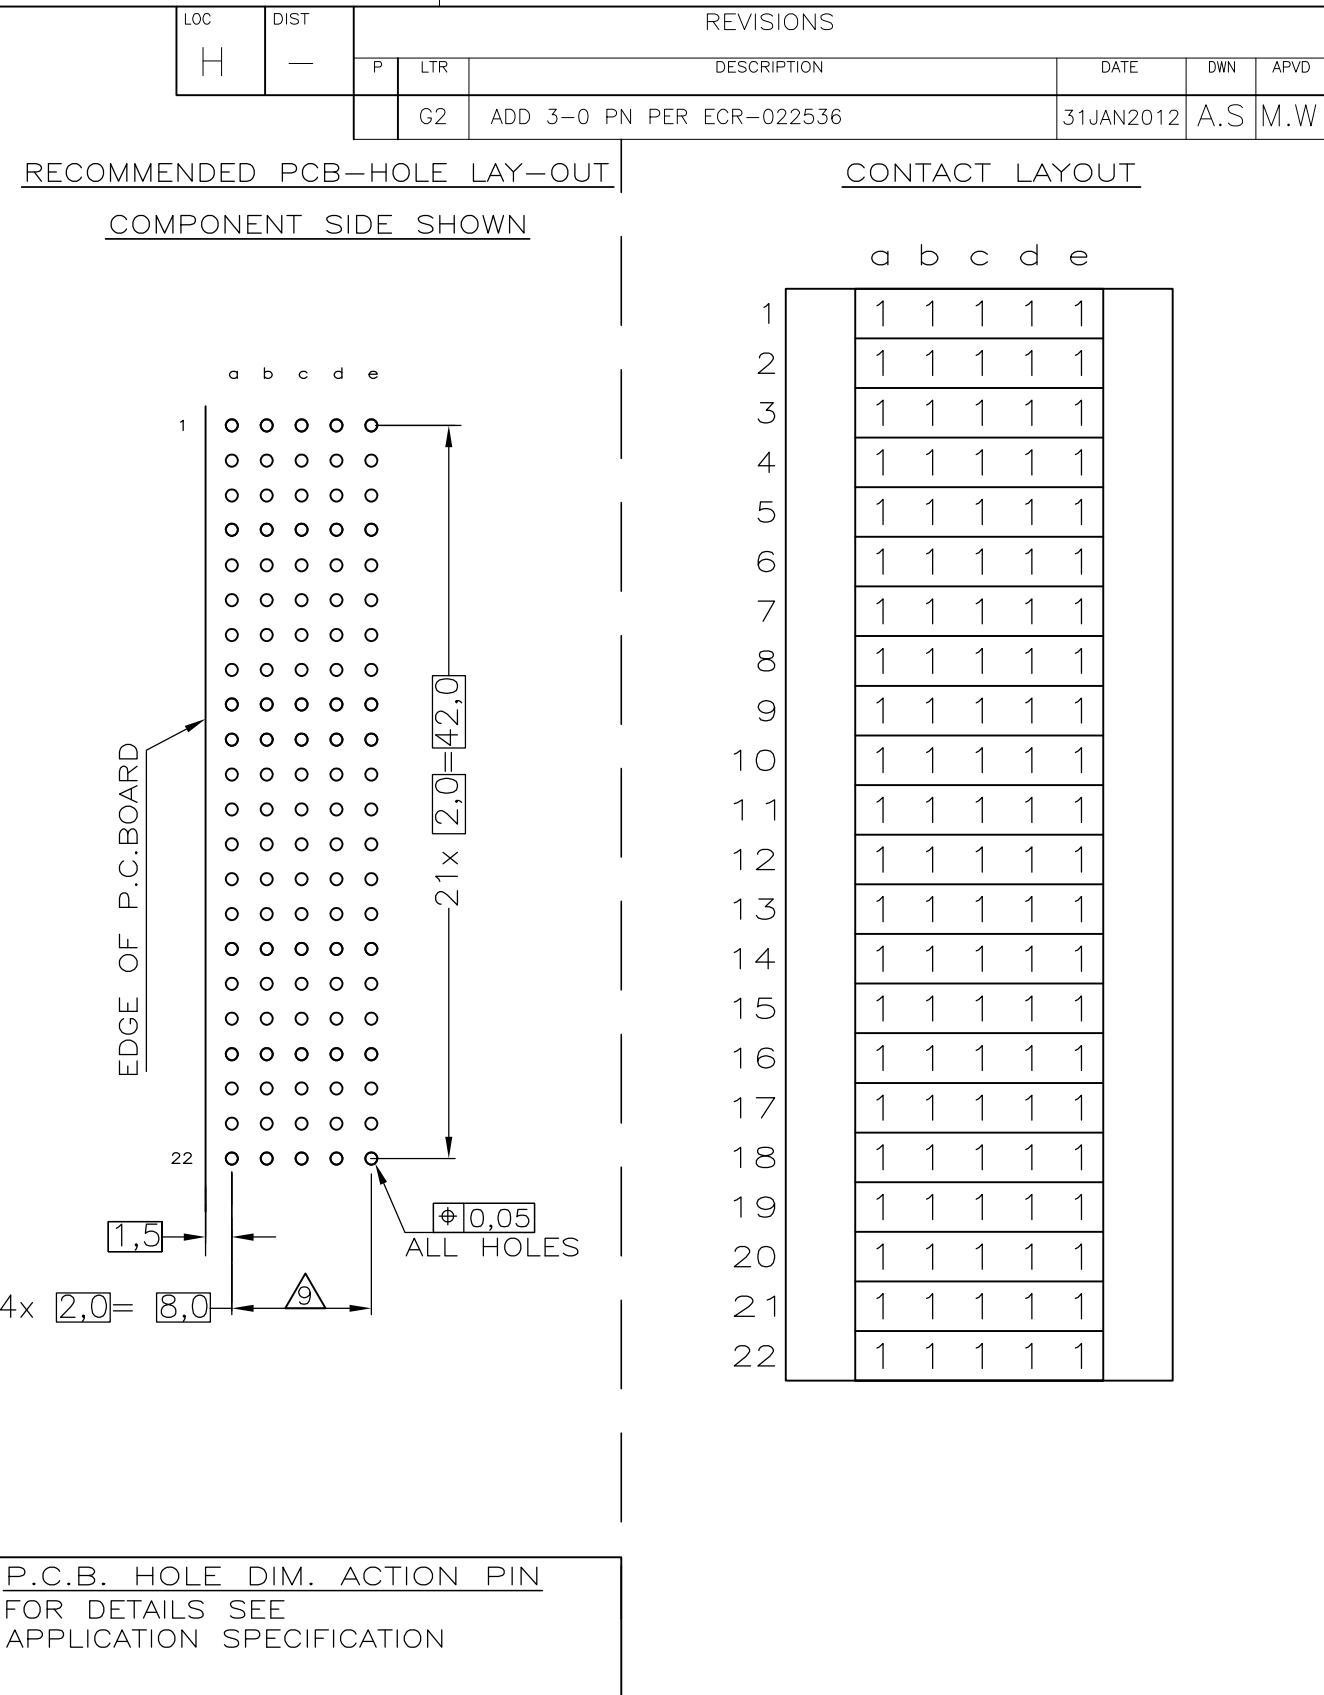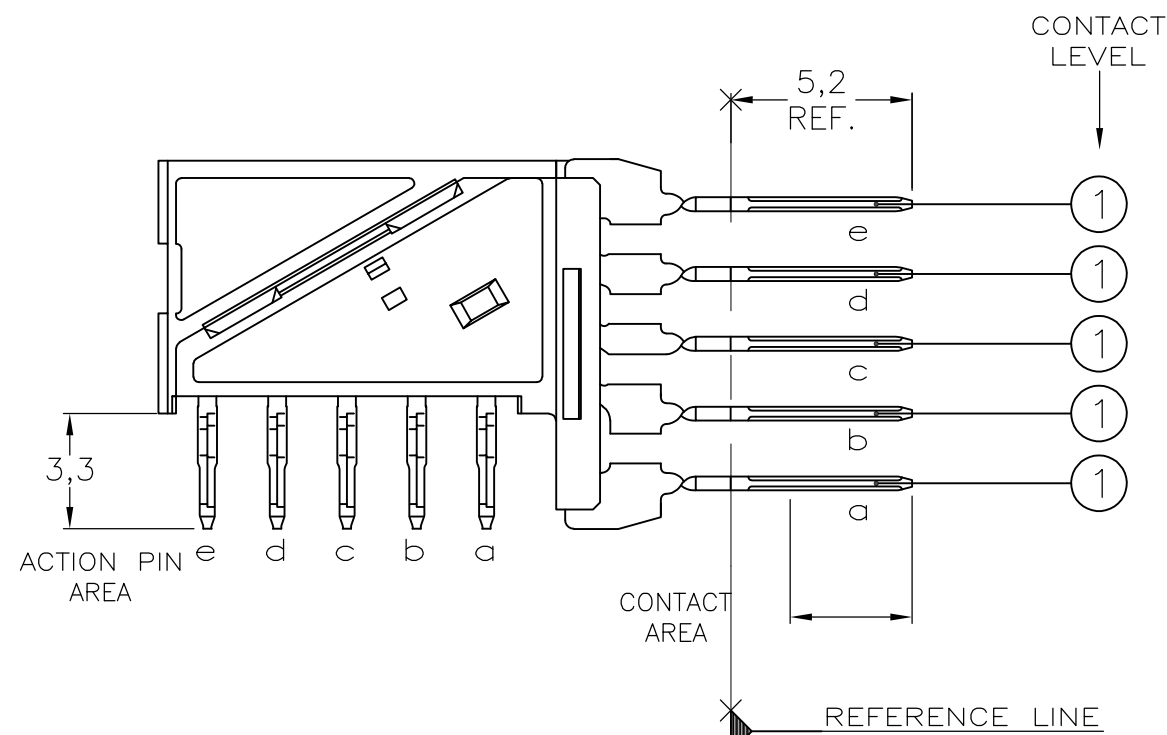

 OBSOLETE	N		3-352131-0		
	Y 		1-352131-9		
	Y 		352131-9		
	N		352131-4		
	N		352131-1		
	CONSERVATION TREATMENT	CONTACT FINISH	PARTNUMBER		
HEJUDEN	15DEC97	 TE Connectivity			
UREN	15DEC97				
INGSBRUGGE SPEC	-				
ON SPEC	NAME		Z-PACK 2MM HM TYPE B22		
4-19029			110 POS. RIGHT ANGLE MALE		
-			CONNECTOR ASSEMBLY		
	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
	A2	00779	C-352131	-	
MER DRAWING			SCALE	SHEET	REV
			NTS	1 of 1	G2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-352131-0](#)