
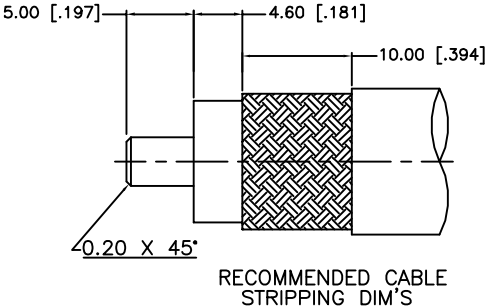
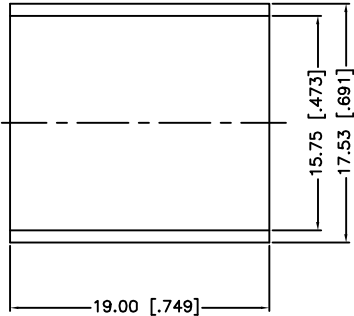


REV.	DATE	DESCRIPTION
NC	12/29/00	INITIAL RELEASE
A	12/15/06	UPDATE DRAWING FORMAT
B	01/29/10	ADDED CABLE STRIPPING DIMENSIONS

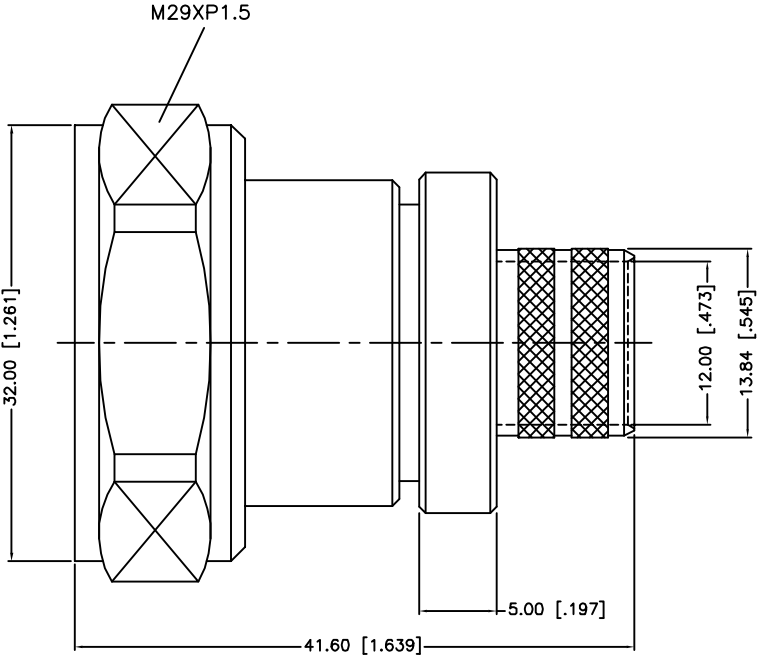

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
 2. SILVER PL. 120 MIN. THICK OVER COPPER STRIKE
 3. BERYLLIUM COPPER PER QQ-C-530.
 4. SILVER PL. 200 MIN. THICK OVER COPPER STRIKE
 5. TEFLON MIL-P-19468

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		AMPHENOL CONNEX									
						DRAWN	BALAJI M	01/29/10											
						CHECKED			PART DESCRIPTION 7/16 CRIMP PLUG (FOR LMR600 CABLE)										
						ISSUED													
						SHEET	1 OF 1		PART NO. 272108										
						CAD FILE C:\272\272108.DWG													
6	FERRULE	COPPER	NEXCOTE	1						DWG. NO. 272108.DWG				REV. B		SIZE A		SCALE NA	
5	GASKET	SILICONE	RED	1															
4	CONTACT PIN	BER. COPPER	SILVER	1															
3	INSULATOR	TEFLON	NATURAL	1															
2	NUT	BRASS	NEXCOTE	1															
1	BODY	BRASS	NEXCOTE	1															
NO	DESCRIPTION	MATERIAL	FINISH	QTY															

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[272108](#)