

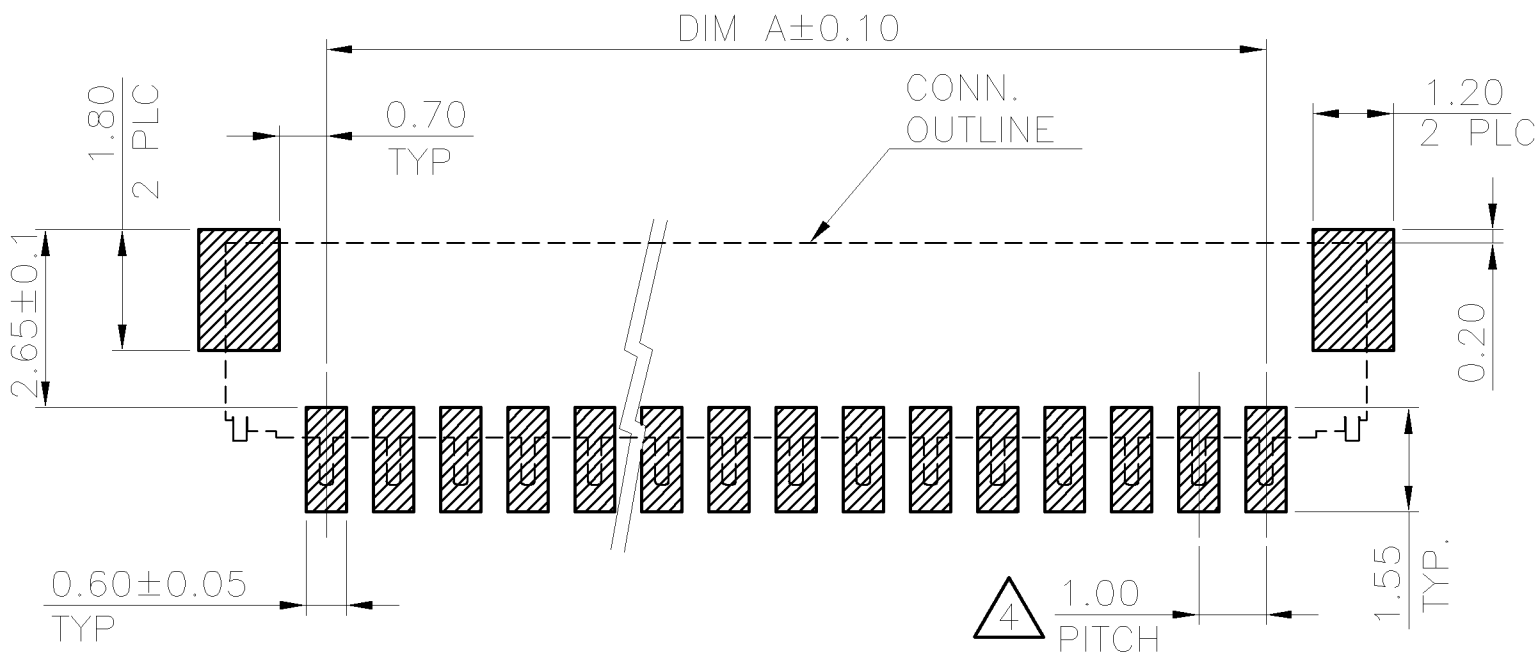
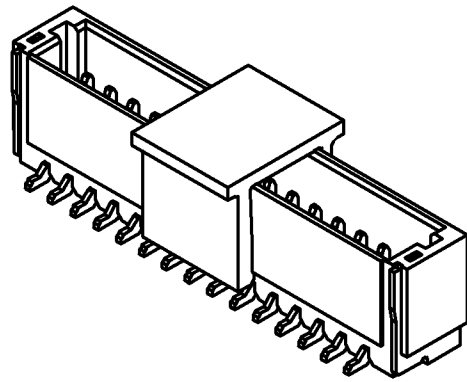
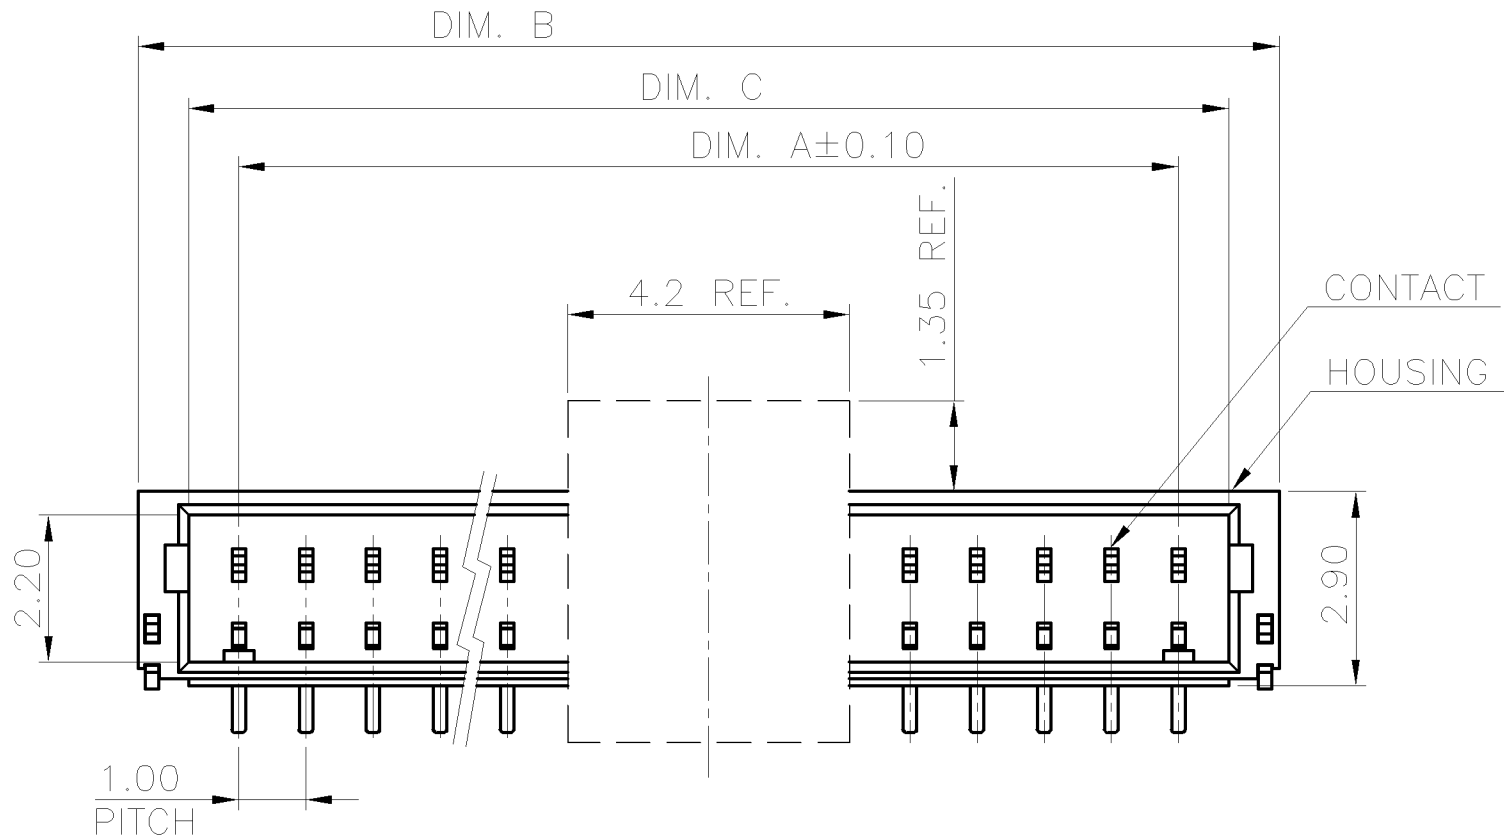




LOC		DIST		REVISIONS					
P	LTR	DESCRIPTION				DATE	DWN	APVD	
	A2	REVISED (ECR-11-004106)				23FEB11	JC	WK	

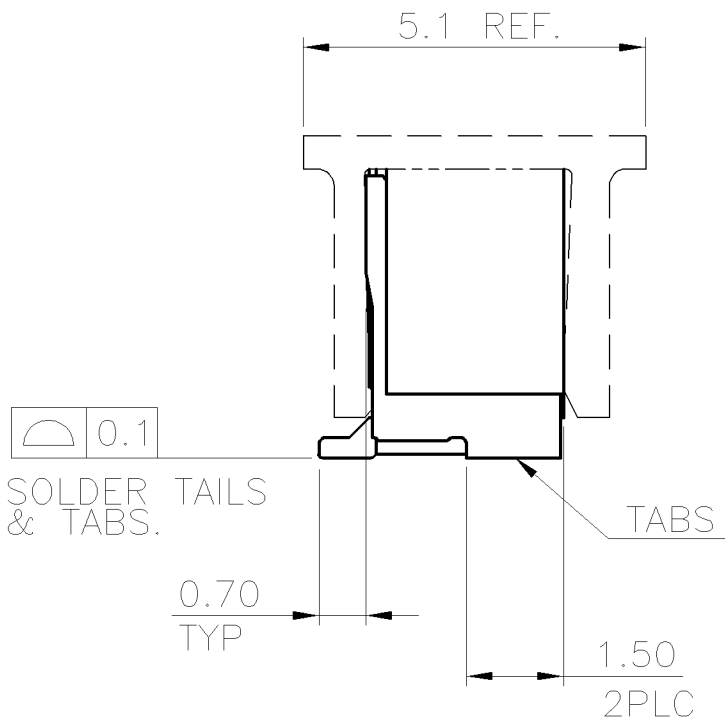

RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05

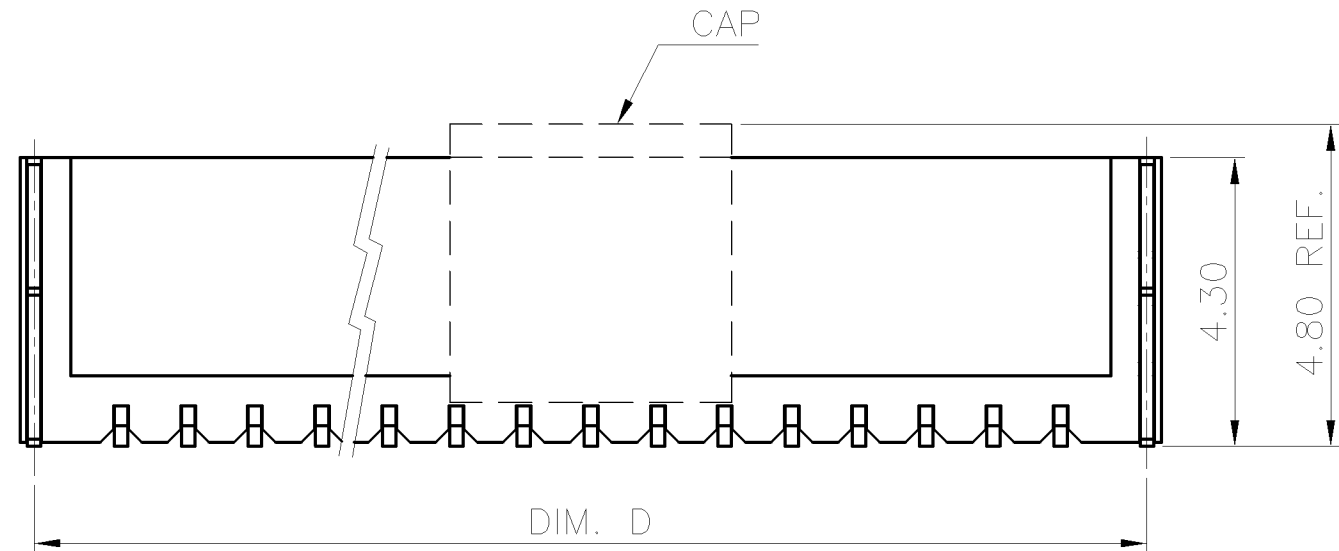


EVEN NO. OF PINS SPEC.

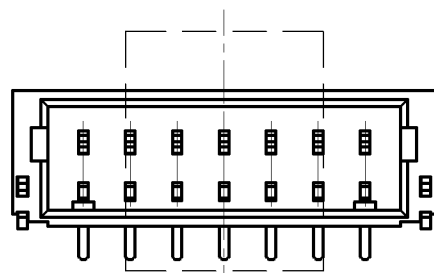

ODD NO. OF SPEC.

- NOTE:
- MATERIAL:
HOUSING: LCP WITH 30% GF, UL 94V-0, NATURAL COLOR.
CAP: LCP WITH 30% GF, UL 94V-0, BLACK COLOR.
CONTACTS: PHOSPHOR BRONZE, 0.2±0.05mm THICKNESS.
TABS: BRASS, 0.2±0.05mm THICKNESS.
 - FINISH:
CONTACTS: 2.54μm [100μ"] MIN. MATTE-TIN OVER
1.27μm [50μ"] MIN. NICKEL PLATED.
TABS: 2.54μm [100μ"] MIN. MATTE-TIN OVER
1.27μm [50μ"] MIN. NICKEL PLATED.
 - REFLOW SOLDER CAPABLE TO 260°C PER TE TEST SPEC. 109-201, CONDITION B.
 - NO ACCUMULATE TOLERANCE.
 - NO TE LOGO AND DATE CODE ON THE PRODUCT.
 - LOW HALOGEN SPEC:
CHLORINE(Cl): 900ppm MAX.
BROMIN(Br): 900ppm MAX.
CHLORINE(Cl) & BROMIN(Br): 1500ppm MAX.

0.28g	16.6	15.5	17.3	14.00	15	1-2041190-5
0.20g	9.6	8.5	10.3	7.00	8	2041190-8
0.18g	7.6	6.5	8.3	5.00	6	2041190-6
0.15g	5.6	4.5	6.3	3.00	4	2041190-4
WEIGHT	D	C	B	A	NO. OF CONTACTS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN F. YANG 18SEP2009		 Tyco Electronics Corporation Taipei, Taiwan		
		CHK S. CHIEN 18SEP2009				
		APVD W. KODAMA 18SEP2009		NAME		
DIMENSIONS: MM		TOLERANCES UNLESS OTHERWISE SPECIFIED:		WIRE TO BOARD CONNECTOR,1.0MM PITCH SINGLE ROW, HEADER, SMT, VERTICAL TYPE.		
		0 PLC ± - 1 PLC ± 0.3 2 PLC ± 0.2 3 PLC ± 0.15 4 PLC ± - ANGLES ± 3°				
MATERIAL SEE NOTE		FINISH SEE NOTE		SIZE	CAGE CODE	DRAWING NO
		WEIGHT SEE TABLE		A3	00779	C=2041190
CUSTOMER DRAWING				SCALE	SHEET	REV
				-	1 OF 2	A2

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG ,2006.



COPYRIGHT 2009

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

DW

REVISIONS

P

LTR



DESCRIPTION

DATE

DWN


APVD

SEE SHEET 1.

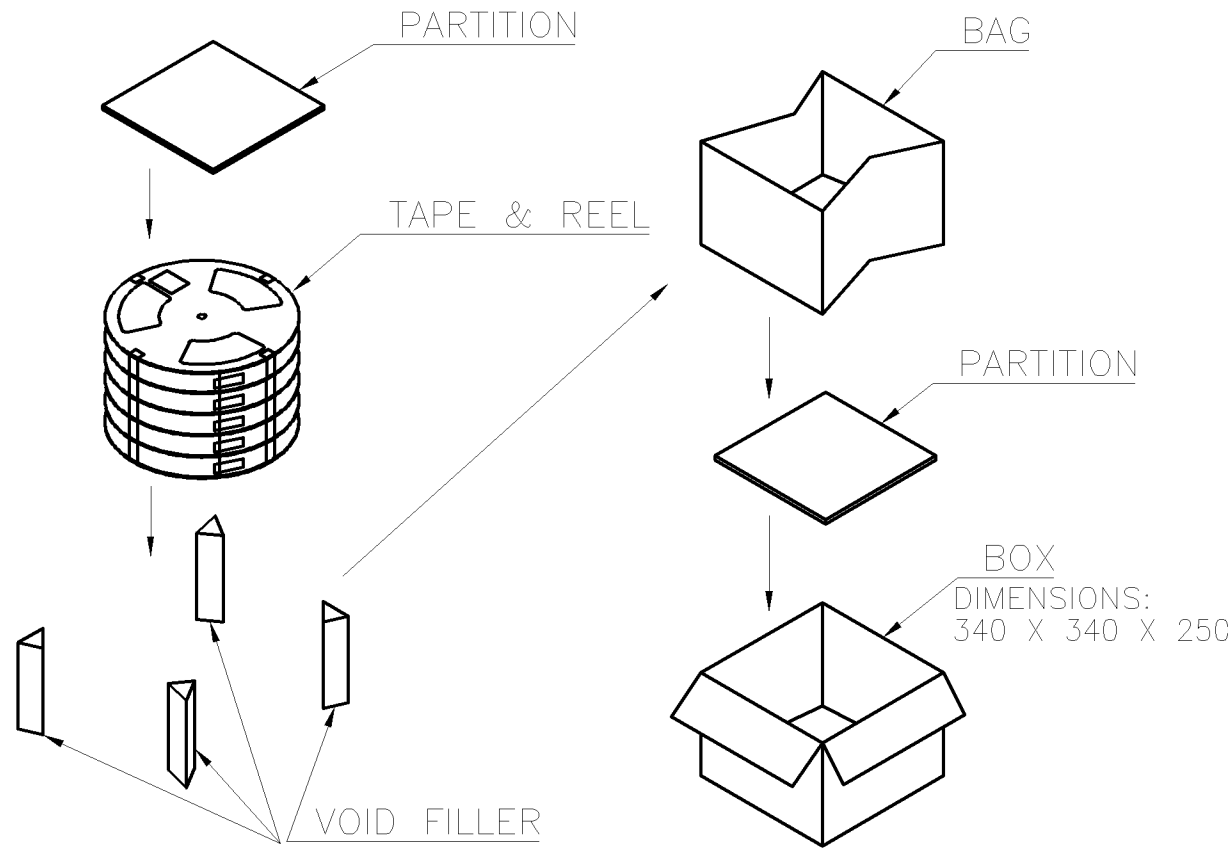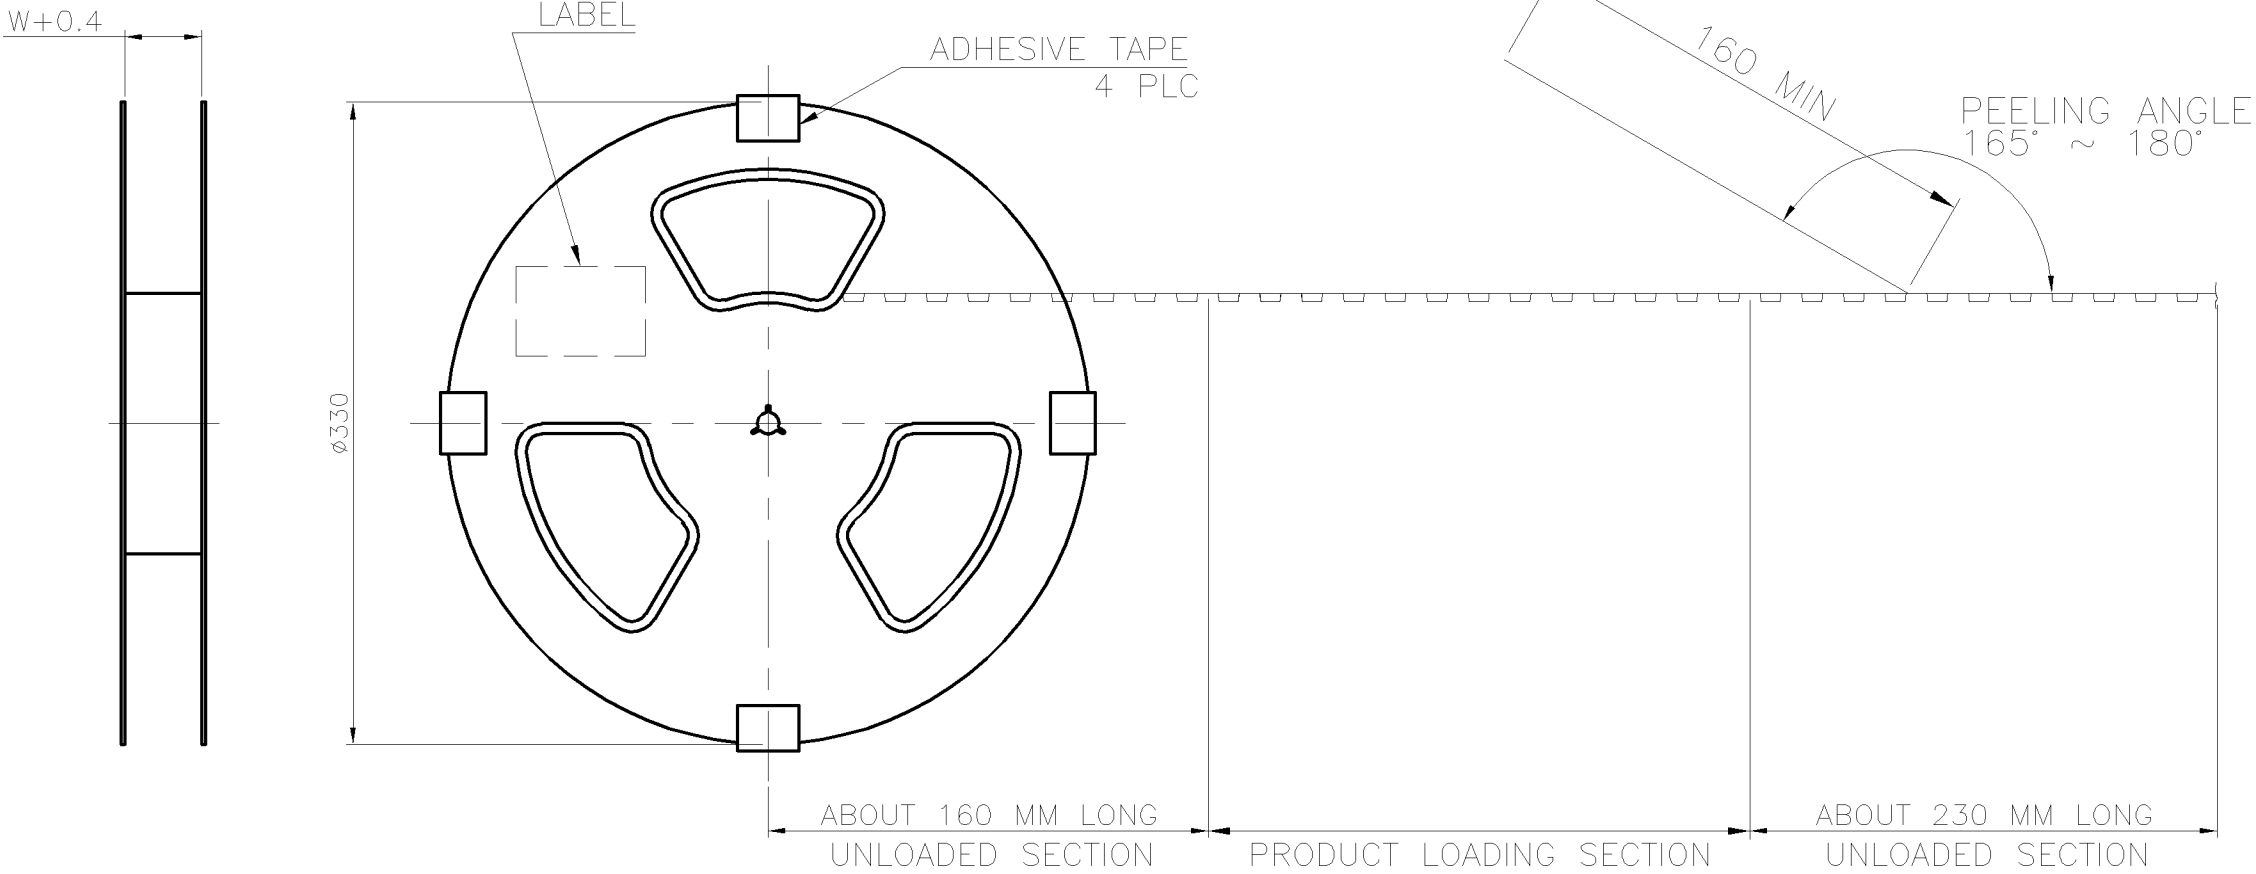


TOP OF TAPE

TOP OF TAPE

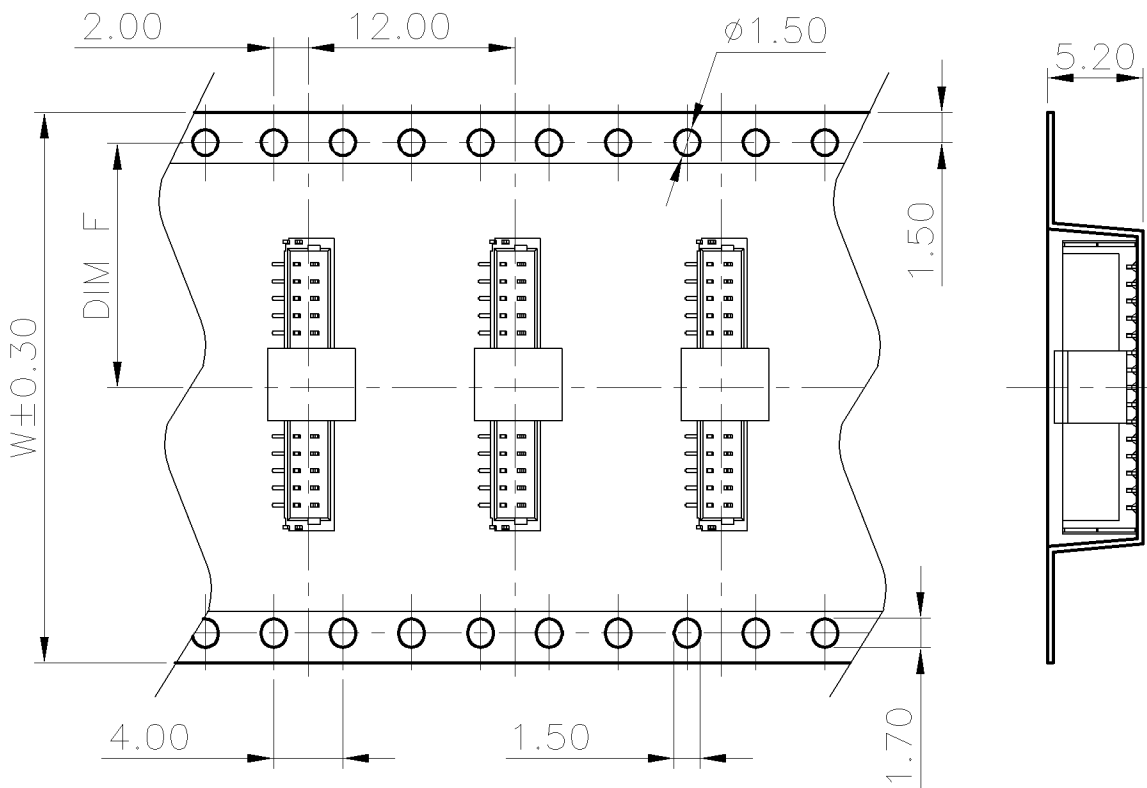


CARRIER FOR 15 PIN

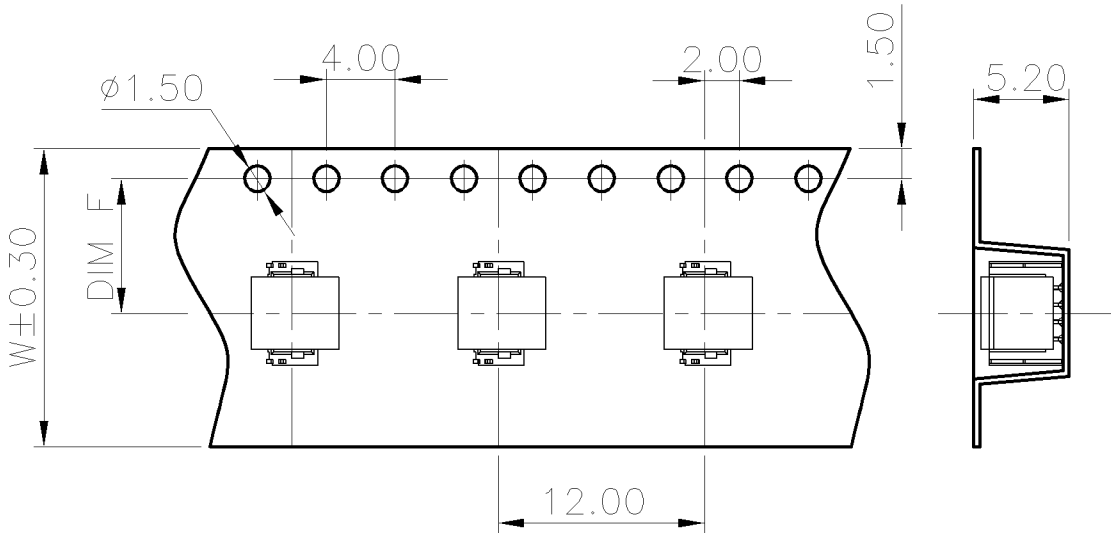

CARRIER FOR 4 & 6 & 8 PIN

- NOTE:
1. PEELING RESISTANCE: 10gf ~ 130gf.
 2. PEELING SPEED: 300mm/MINUTES.

14.20	32.0	1000	6	6000	5.29	1.70	15
11.50	24.0	1000	7	7000	4.87	1.39	8
7.50	16.0	1000	10	10000	6.16	1.76	6
7.50	16.0	1000	10	10000	5.90	1.50	4
DIM F	DIM W	PCS/REEL	REELS/BOX	QUANTITY (PCS)	G/W (Kg)	N/W (Kg)	NO. OF CONTACTS

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN		 Tyco Electronics Corporation Taipei, Taiwan									
DIMENSIONS: MM		CHK		NAME WIRE TO BOARD CONNECTOR,1.0MM PITCH SINGLE ROW, HEADER, SMT, VERTICAL TYPE.									
		APVD											
		PRODUCT SPEC —											
		APPLICATION SPEC —											
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± — 4 PLC ± — ANGLES ± —		WEIGHT SEE TABLE		SIZE A3		CAGE CODE 00779		DRAWING NO C=2041190		RESTRICTED TO —			
MATERIAL		FINISH		CUSTOMER DRAWING				SCALE —		SHEET 2 OF 2		REV A2	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-2041190-5](#)