


THIS DRAWING IS UNPUBLISHED.


RELEASED FOR PUBLICATION

© COPYRIGHT BY ALL RIGHTS RESERVED

LOC	DIST	REVISIONS			
		P	LIR	DESCRIPTION	DATE
FB	00		A2	REVISED PER	ECR-16-012124
					07DEC16
					T.Q
					W.H

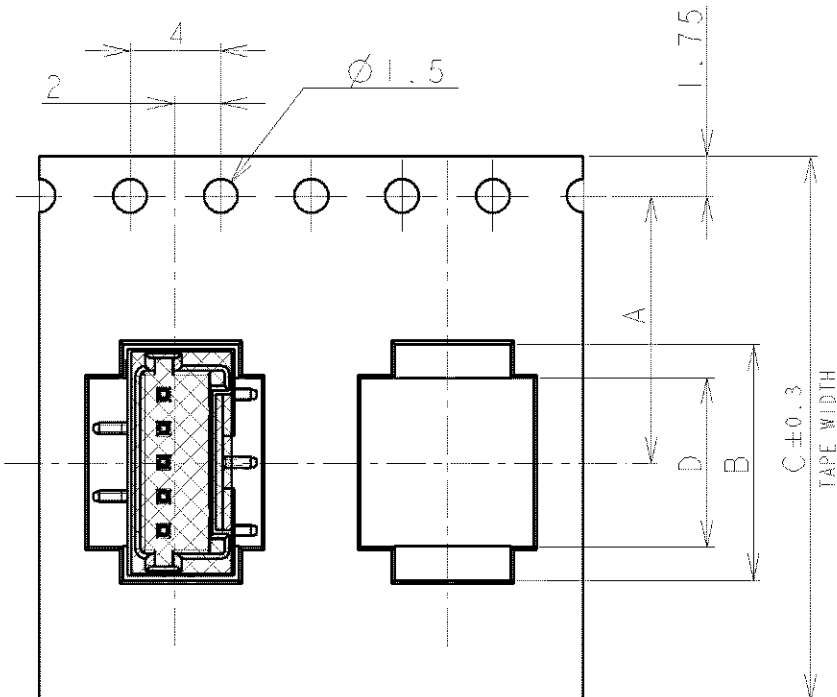

TYPE 1


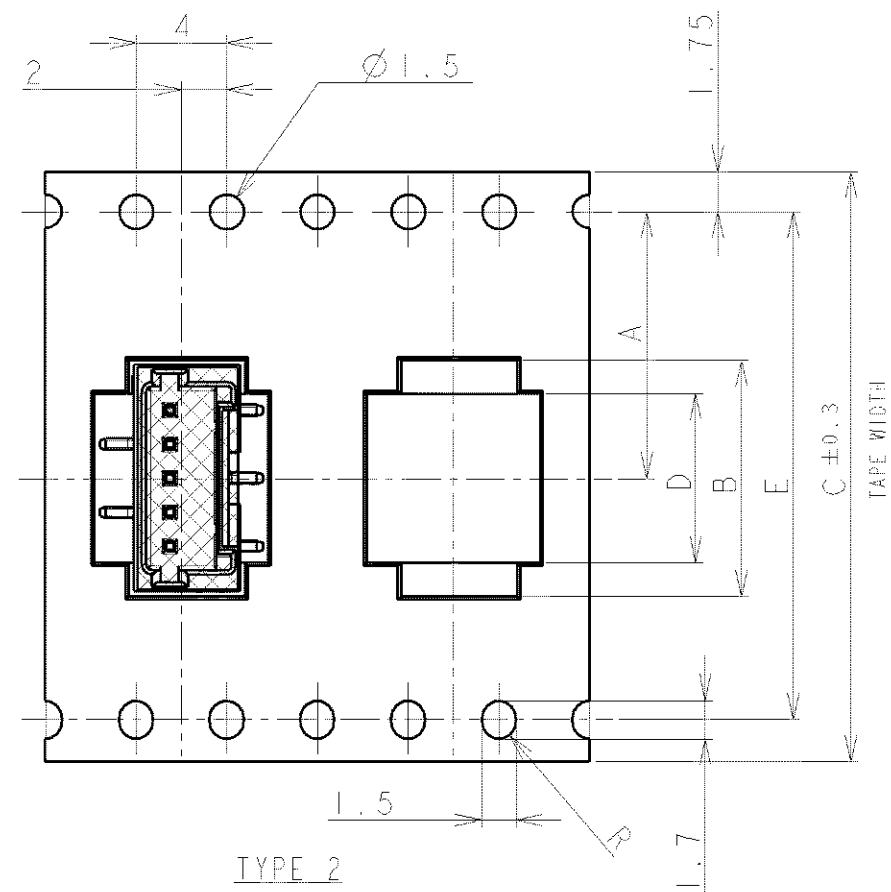



TYPE 2

TOLERANCES UNLESS OTHERWISE SPECIFIED:


10> : ±0.2
30> * >10 : ±0.25
100> * >30 : ±0.3
ANGLE : ±3°

NOTE:
1. PEELING STRENGTH: 0.20-0.69N (20-70gf)
PEELING ANGLE: 165-180°
PEELING SPEED: 300mm/MINUTE.

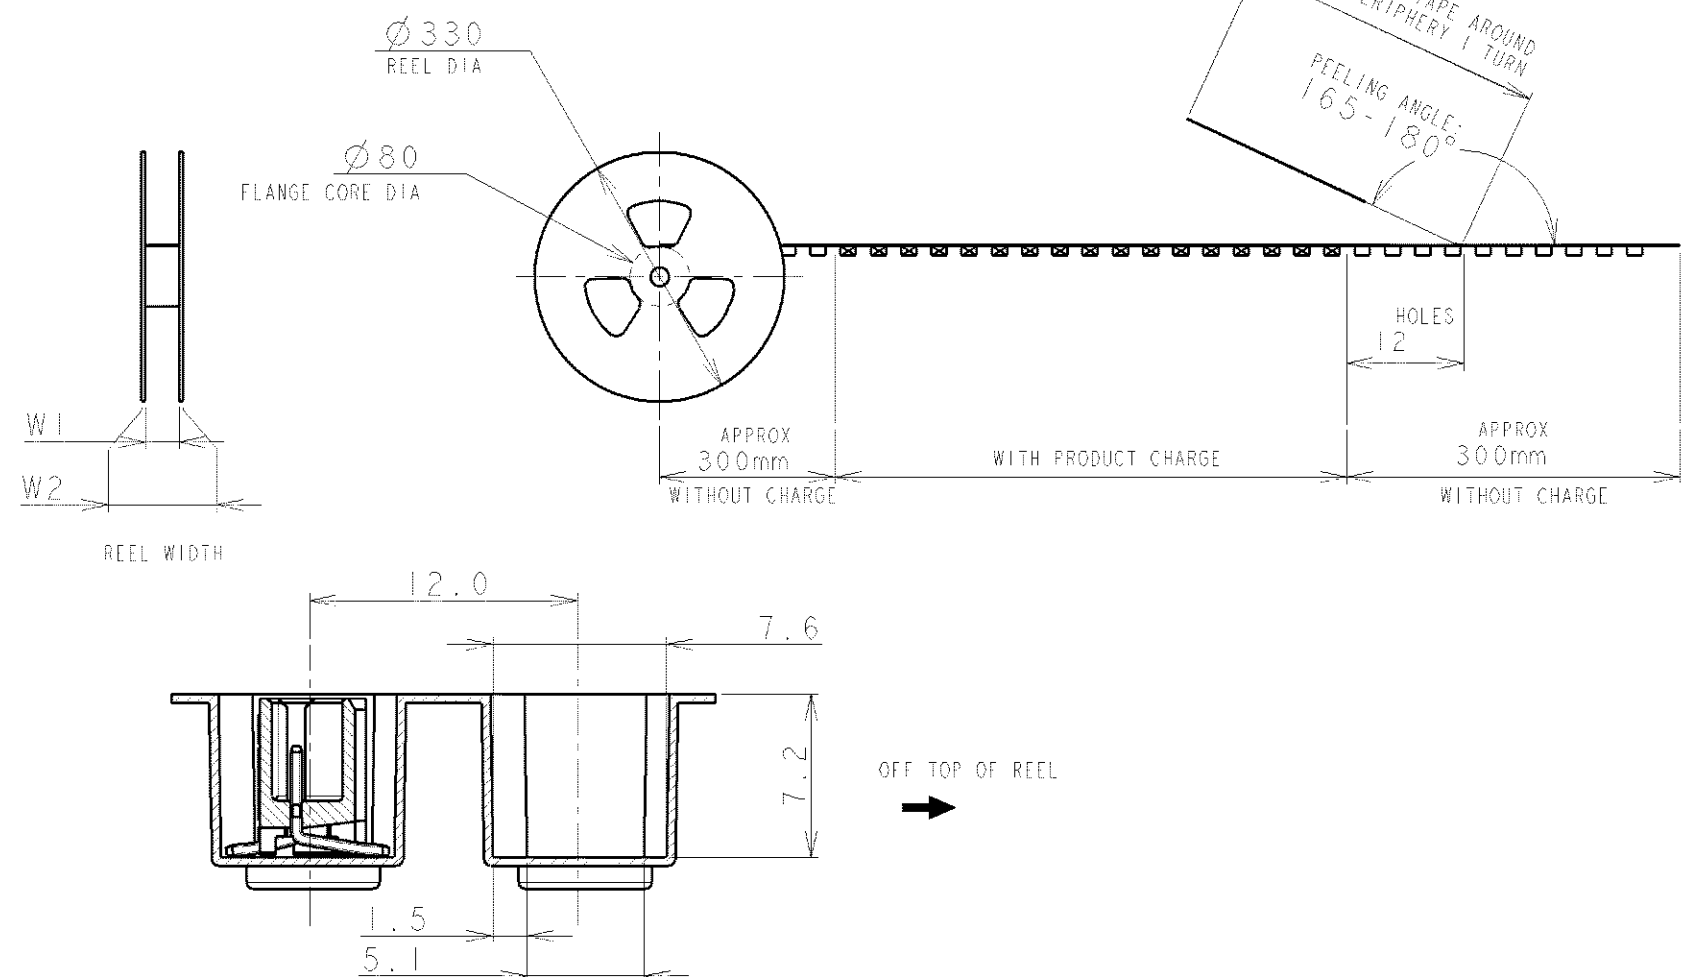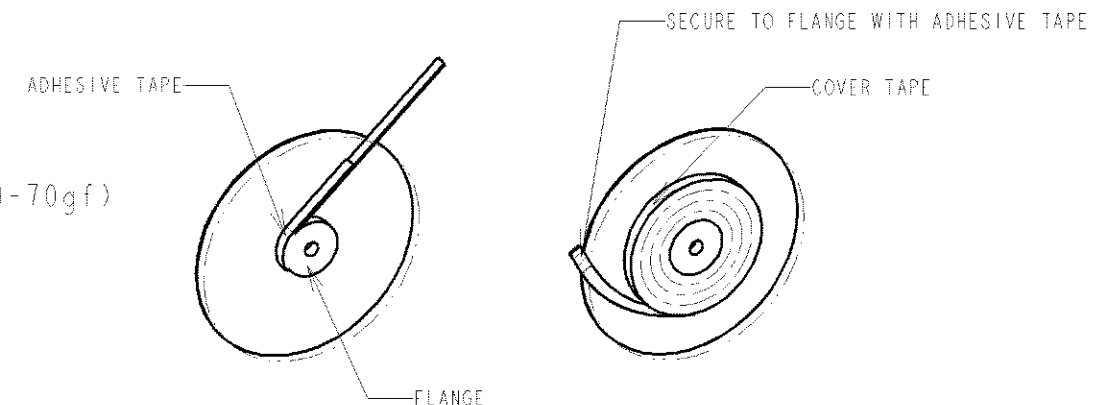

		DWN S.XU	31JAN03	 TE Connectivity			
		CHK S.YAO	31JAN03				
DIMENSIONS: mm		APVD T.SASAKI	31JAN03	NAME AMP Mini Common Terminated (CT) Connector 1.5mm PITCH			
		PRODUCT SPEC 108-60018		SINGLE ROW POST HDR ASS'Y (V) SMT TYPE			
		APPLICATION SPEC 114-5223		WITH BOSS, POLYIMIDE TAPE, EMBOSS TAPE PACKAGED			
		WEIGHT		SIZE A3	CAGE CODE 00779	DRAWING NO C-292232	RESTRICTED TO -
MATERIAL		CUSTOMER DRAWING		SCALE NON	SHEET 1	OF 4	REV A2
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±							

LOC	DIST	REVISIONS				DATE	DWN	APVD
FB	00	P	LTR	DESCRIPTION				
				SEE SHEET 1				

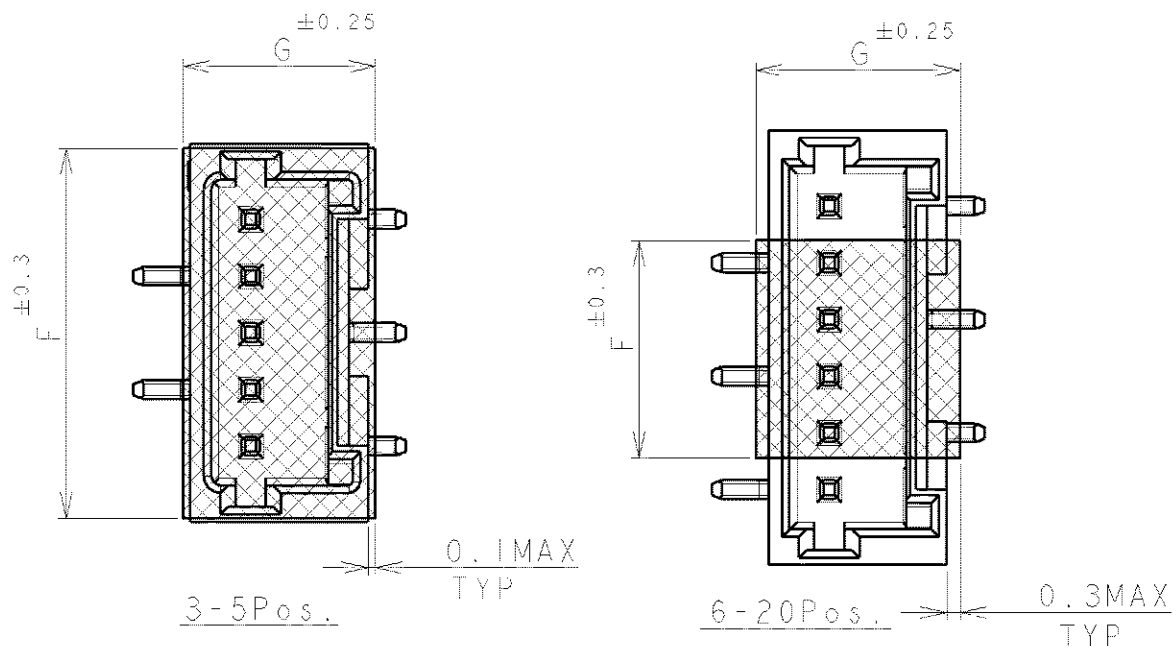

TYPE 2	49.5	45.5	5.0	9.5	40.4	29.9	44	32.9	20.2±0.15	500	20	BEIGE	2-292232-0
	49.5	45.5	5.0	9.5	40.4	28.4	44	31.4		500	19		1-292232-9
	49.5	45.5	5.0	9.5	40.4	26.9	44	29.9		500	18		1-292232-8
	49.5	45.5	5.0	9.5	40.4	25.4	44	28.4		500	17		1-292232-7
	49.5	45.5	5.0	9.5	40.4	23.9	44	26.9		500	16		1-292232-6
	49.5	45.5	5.0	9.5	40.4	22.4	44	25.4		500	15		1-292232-5
	49.5	45.5	5.0	9.5	40.4	20.9	44	23.9		500	14		1-292232-4
	49.5	45.5	5.0	9.5	40.4	19.4	44	22.4		500	13		1-292232-3
	37.5	33.5	5.0	9.5	28.4	17.9	32	20.9	14.2	500	12		1-292232-2
	37.5	33.5	5.0	9.5	28.4	16.4	32	19.4	14.2	500	11		1-292232-1
	37.5	33.5	5.0	9.5	28.4	14.9	32	17.9	14.2	500	10		1-292232-0
	37.5	33.5	5.0	6.5	28.4	13.4	32	16.4	14.2	500	9		292232-9
TYPE 1	29.5	25.5	5.0	6.5	-	11.9	24	14.9	11.5	500	8		292232-8
	29.5	25.5	5.0	6.5	-	10.4	24	13.4	11.5	500	7		292232-7
	29.5	25.5	5.0	6.5	-	8.9	24	11.9	11.5	500	6		292232-6
	29.5	25.5	5.0	9.5	-	7.4	24	10.4	11.5	500	5		292232-5
	21.5	17.5	5.0	8.0	-	5.9	16	8.9	7.5	500	4		292232-4
	21.5	17.5	5.0	6.5	-	4.4	16	7.4	7.5	500	3		292232-3
TAPE TYPE	W2	W1	G	F	E	D	C	B	A	QTY/REEL	POS	COLOR	ON TAPE P/N

DIMENSIONS

DIMENSIONS:

mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC
1 PLC
2 PLC
3 PLC
4 PLC
ANGLES

±



DWN

CHK

APVD

PRODUCT SPEC

SEE SHEET 1

APPLICATION SPEC

SEE SHEET 1

WEIGHT

CUSTOMER DRAWING

MATERIAL

FINISH



TE Connectivity

NAME AMP Mini Common Terminated (CT) Connector 1.5mm PITCH

SINGLE ROW POST HDR ASS'Y (V) SMT TYPE

WITH POLYIMIDE TAPE, WITH BOSS, EMOSS TAPE PACKAGED

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A4 00779 G-292232

SCALE

NON

SHEET

2

OF

4

REV





A2

THIS DRAWING IS UNPUBLISHED




RELEASED FOR PUBLICATION

COPYRIGHT BY ALL RIGHTS RESERVED.

LOC	REV	REVISIONS			DATE	DWN	APVD
FB	00	P	LIR	DESCRIPTION			
				SEE SHEET 1			

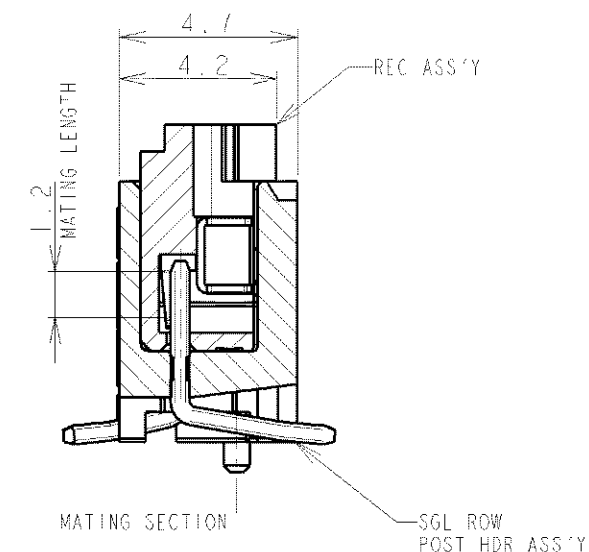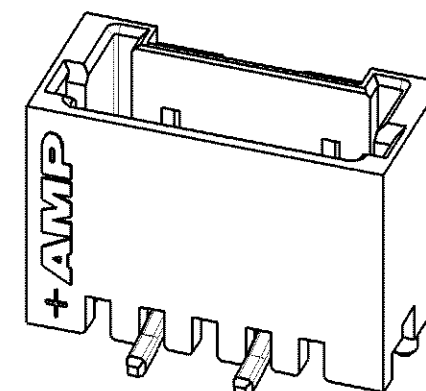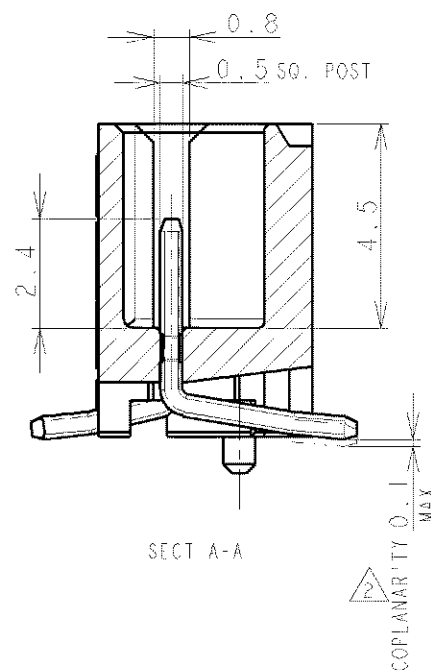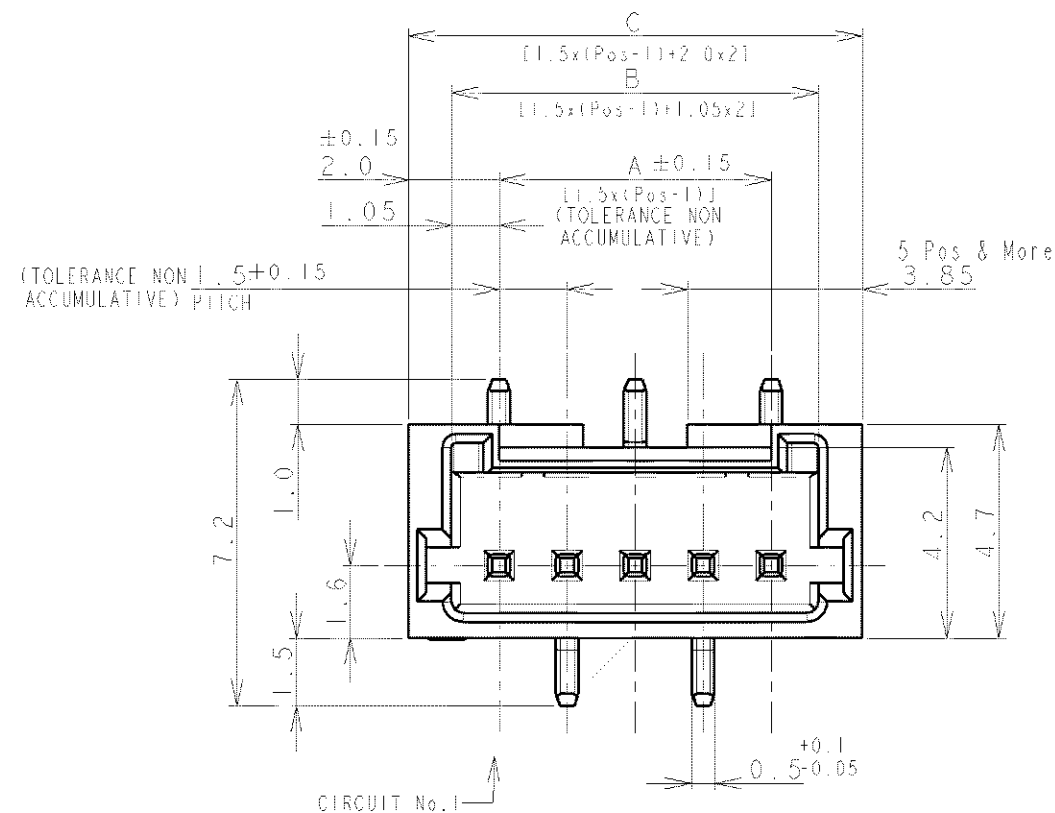


CIRCUIT No. 1

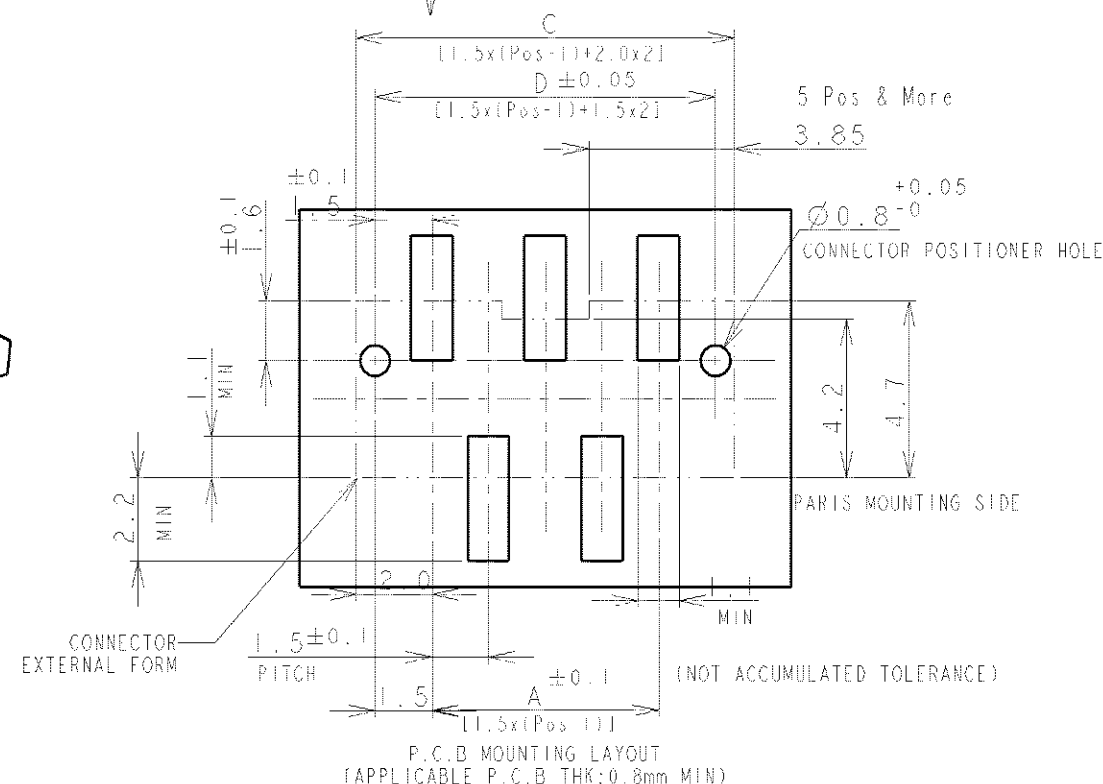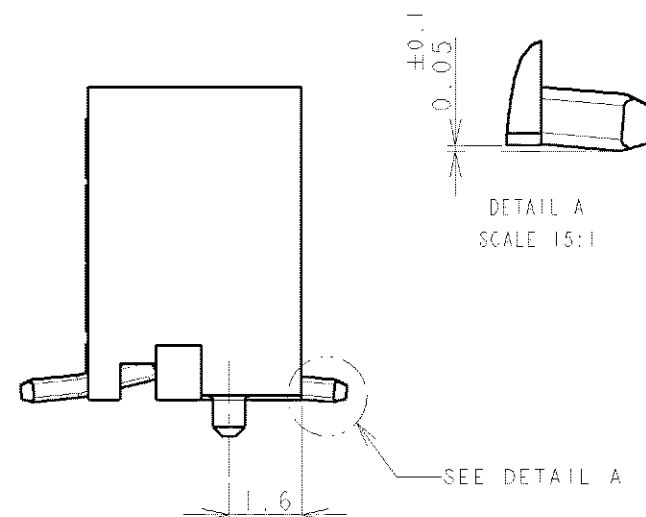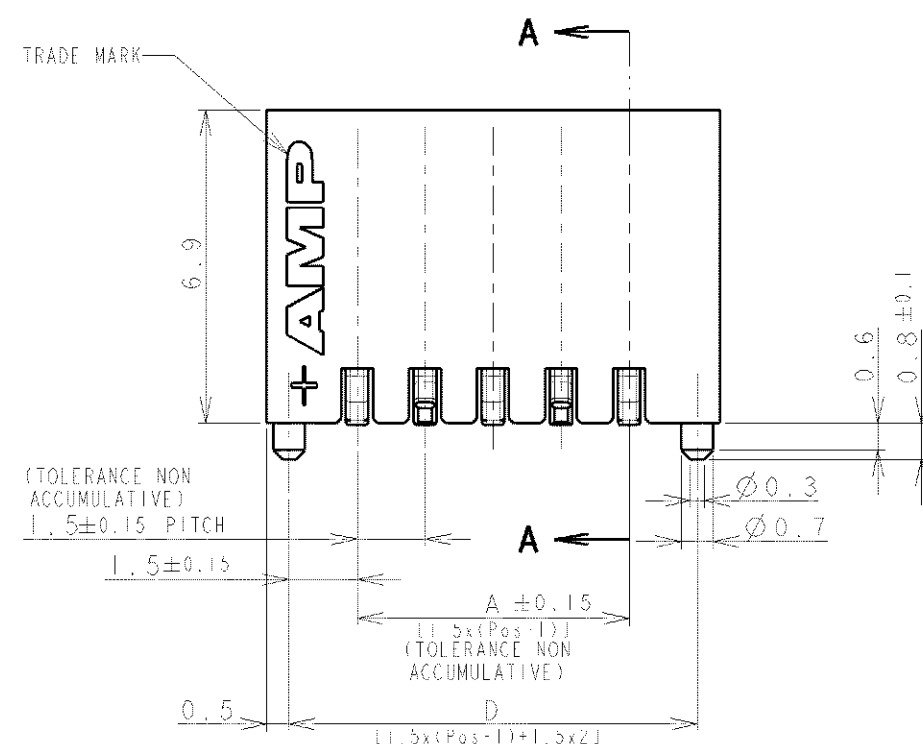

SHOWN AS WIHTOUT TAPE

NOTES:

- MATERIAL: HOUSING: GLASS FILLED, HIGH HEAT RESISTANT NYLON, UL94V-0, COLOR: BEIGE OR BLACK POST: Sn-100% BRASS WIRE
- TO BE MEASURED WITH CONNECTOR PLACED ON HORIZONTAL DATUM SURFACE, FLOAT OF SOLDER TINE FROM DATUM SURFACE IS 0.1mm MAX.

		DWN	 TE Connectivity						
		CHK							
DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD	NAME						
mm		PRODUCT SPEC	AMP MINI COMMON TERMINATION (CT) CONNECTOR 1.5 mm PITCH						
	0 PLC ±	APPLICATION SPEC	SINGLE ROW POST HDR ASS'Y (V) SMT TYPE WITH BOSS						
	1 PLC ±								
	2 PLC +								
	3 PLC ±								
	4 PLC ±								
	ANGLES ±		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO			
MATERIAL	FINISH	WEIGHT	A3		00779	G-292232			
SEE NOTE 1	SEE NOTE 1	CUSTOMER DRAWING	SCALE		NON	SHEET	3 OF 4	REV	A2

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION


ALL RIGHTS RESERVED.

BY

© COPYRIGHT

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
FB	00			SEE SHEET 1	-	-	-

0.98	31.5	32.5	30.6	28.5	20	2-292232-0
0.93	30.0	31.0	29.1	27.0	19	1-292232-9
0.89	28.5	29.5	27.6	25.5	18	1-292232-8
0.84	27.0	28.0	26.1	24.0	17	1-292232-7
0.80	25.5	26.5	24.6	22.5	16	1-292232-6
0.75	24.0	25.0	23.1	21.0	15	1-292232-5
0.71	22.5	23.5	21.6	19.5	14	1-292232-4
0.66	21.0	22.0	20.1	18.0	13	1-292232-3
0.62	19.5	20.5	18.6	16.5	12	1-292232-2
0.57	18.0	19.0	17.1	15.0	11	1-292232-1
0.52	16.5	17.5	15.6	13.5	10	1-292232-0
0.48	15.0	16.0	14.1	12.0	9	292232-9
0.43	13.5	14.5	12.6	10.5	8	292232-8
0.39	12.0	13.0	11.1	9.0	7	292232-7
0.34	10.5	11.5	9.6	7.5	6	292232-6
0.30	9.0	10.0	8.1	6.0	5	292232-5
0.25	7.5	8.5	6.6	4.5	4	292232-4
0.20	6.0	7.0	5.1	3.0	3	292232-3
WEIGHT (g)	D	C	B	A	Pos.	BEIGE (NAT)
	DIMENSIONS					P/N

DIMENSIONS: mm	DWN	MATERIAL SEE SHEET 1	FINISH SEE SHEET 1
TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK	 TE Connectivity	
0 PLC ±	APVD		
1 PLC ±	PRODUCT SPEC	NAME AMP MINI COMMON TERMINATED (CT) CONNECTOR 1.5 mm PITCH	
2 PLC ±	APPLICATION SPEC	SINGLE ROW POST HDR ASS'Y (V) SMT TYPE WITH BOSS	
3 PLC ±	WEIGHT	SIZE A4	CAGE CODE 00779
4 PLC ±		DRAWING NO G-292232	RESTRICTED TO
ANGLES ±		SCALE NON	SHEET 4
	CUSTOMER DRAWING	OF 4	REV A2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[292232-7](#)