



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	V2	REVISED PER ECO-16-004223	19JUL2016	NK	MZ

D

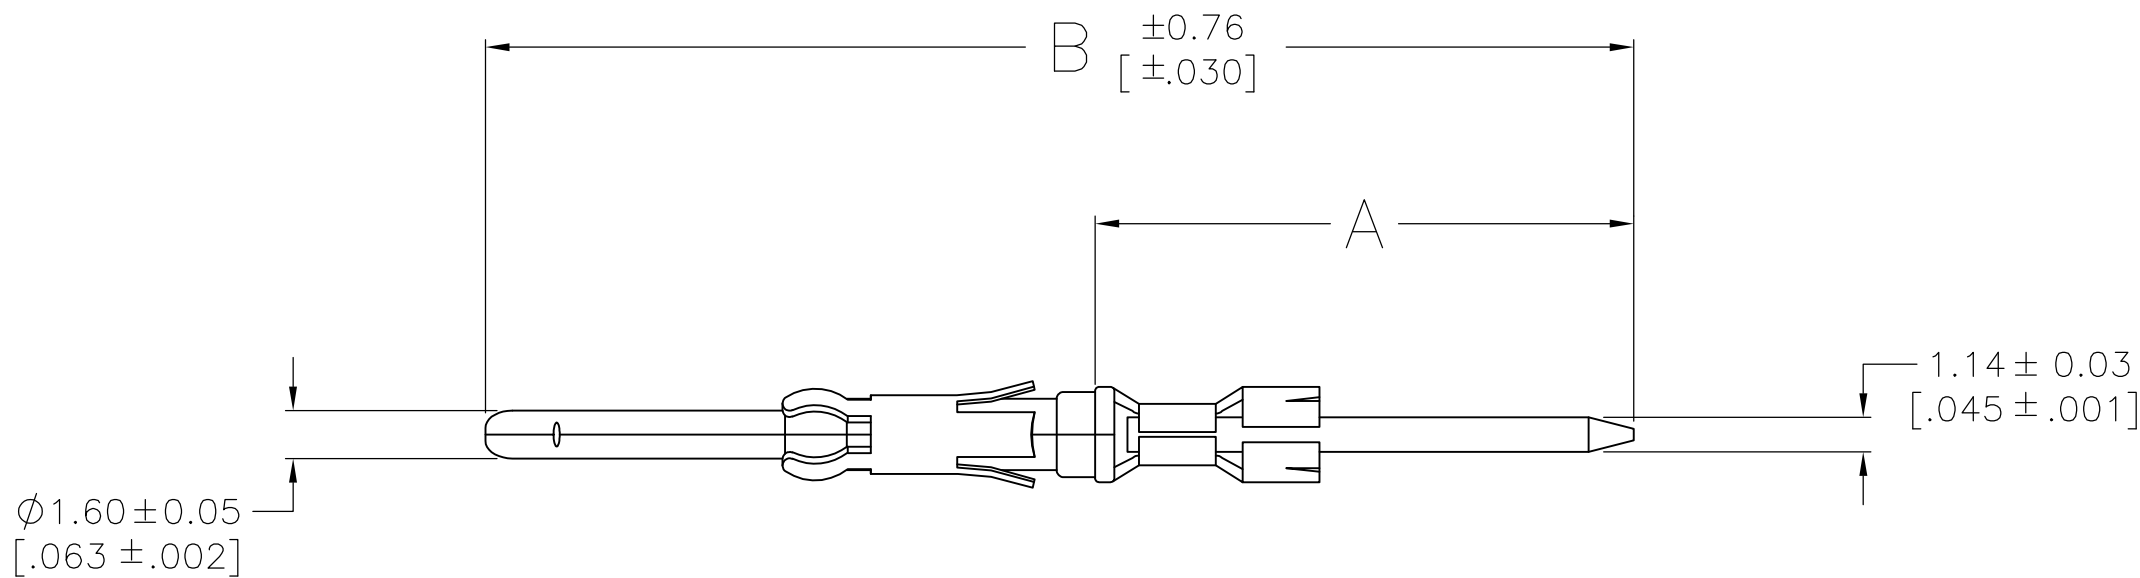

C

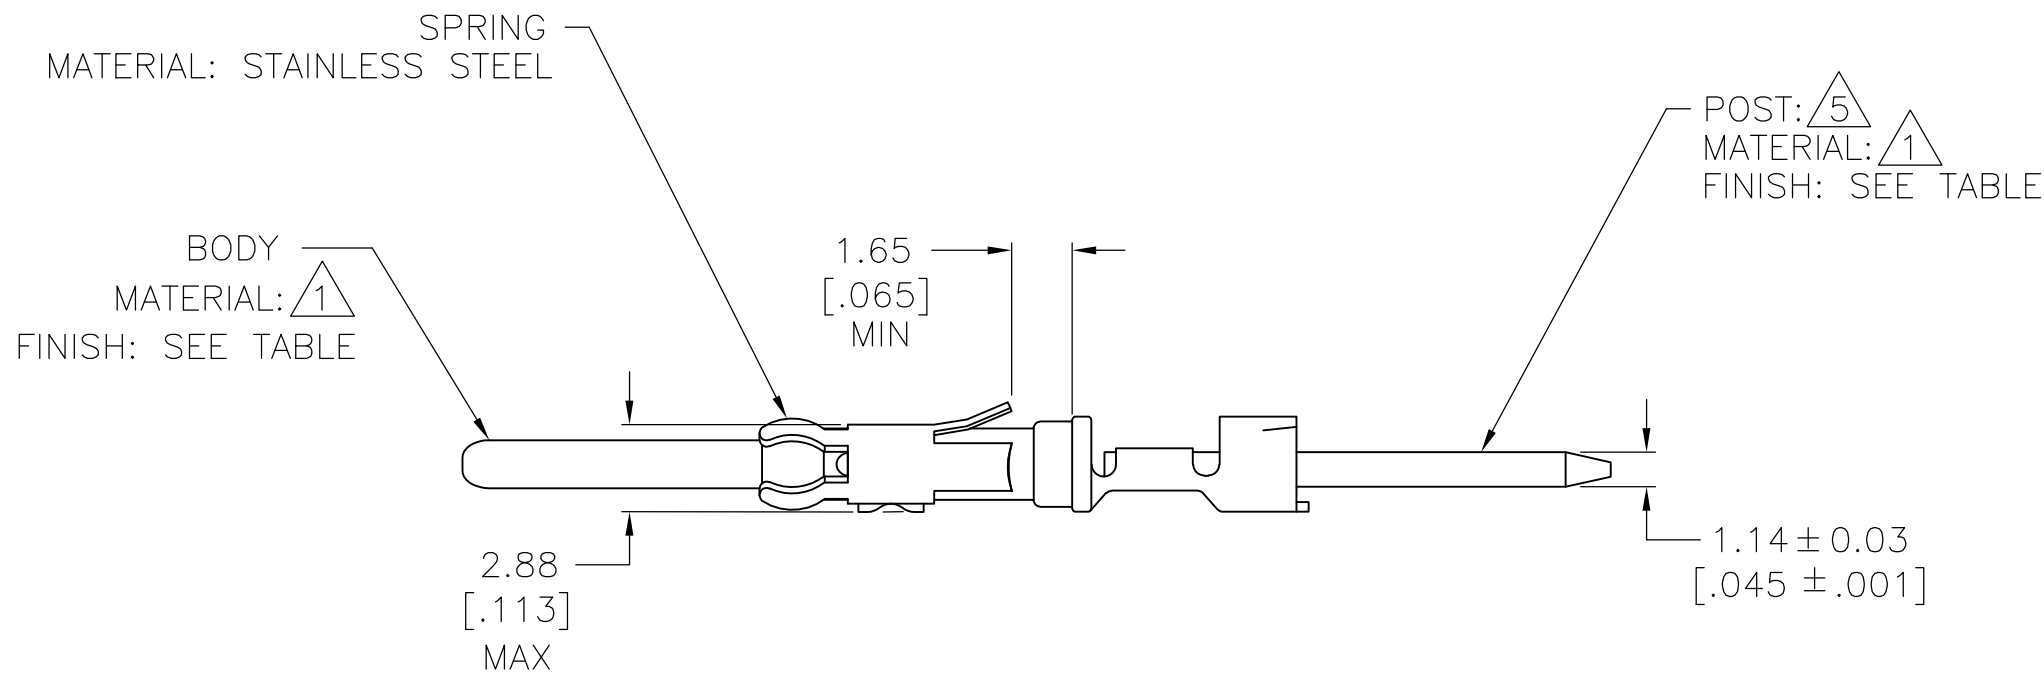

B

A

- 1

BRASS PER ASTM B-36.
- 2

2.54um[.000100] MIN TIN-LEAD OVER 1.27um[.000050] MIN NICKEL.
- 3

SELECTIVELY PLATED 0.76um[.000030] MIN GOLD, FOR A DISTANCE OF 5.08[.200] FROM MATING END, GOLD FLASH ON REMAINDER, ALL OVER 1.27um[.000050] MIN NICKEL.
- 4

GOLD PLATING NOT TO APPEAR ON INSULATION SUPPORT STABILIZER.
- 5

POST WILL ACCEPT (SEE TABLE) TERMINATIONS.
- 6

.000100 MIN TIN OVER .000050 NICKEL. (POST).
- 7

OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI.

D

C

B

A

OBSOLETE	6	3	SPECIAL	35.03 [1.379]	14.86 [.585]	1-66471-9
		3	1	37.97 [1.495]	17.81 [.701]	1-66471-8
		6	3	49.89 [1.964]	29.74 [1.171]	1-66471-7
OBSOLETE	6	6	1	37.97 [1.495]	17.81 [.701]	1-66471-6
		3	3	49.89 [1.964]	29.74 [1.171]	1-66471-5
		3	SPECIAL	35.03 [1.379]	14.86 [.585]	7 1-66471-4
OBSOLETE	2	2	SPECIAL	40.79 [1.606]	20.65 [.813]	1-66471-0
		3	3	49.89 [1.964]	29.74 [1.171]	66471-9
		3	1	37.97 [1.495]	17.81 [.701]	66471-7
		2	3	49.89 [1.964]	29.74 [1.171]	66471-3
		2	1	37.97 [1.495]	17.81 [.701]	66471-1
	POST FINISH	BODY FINISH	NO OF TERM	B	A	PART NUMBER

66471

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.REIFSNYDER 07 JUN 96		 TE Connectivity					
DIMENSIONS: mm [INCHES]		CHK R.STONE 12 JUL 96							
	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.25[.010] 3 PLC ± - 4 PLC ± - ANGLES ± -		APVD G.A.STEINHAUER 23 JUL 96	NAME PIN CONTACT, CRIMPED, .062 DIA, .045 x .045 POST,					
			PRODUCT SPEC —						
			APPLICATION SPEC —	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO		
			MATERIAL	FINISH	WEIGHT	A2	00779	C-66471	—
			SEE CALLOUTS	SEE CALLOUTS	CUSTOMER DRAWING			SCALE 4:1	SHEET 1 of 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-66471-8](#)