


LOC		DIST		REVISIONS				
P	LTR	DESCRIPTION			DATE	DWN	APVD	
		C			REVISED PER ECR-16-003314	15JUL2016	BW	GJ

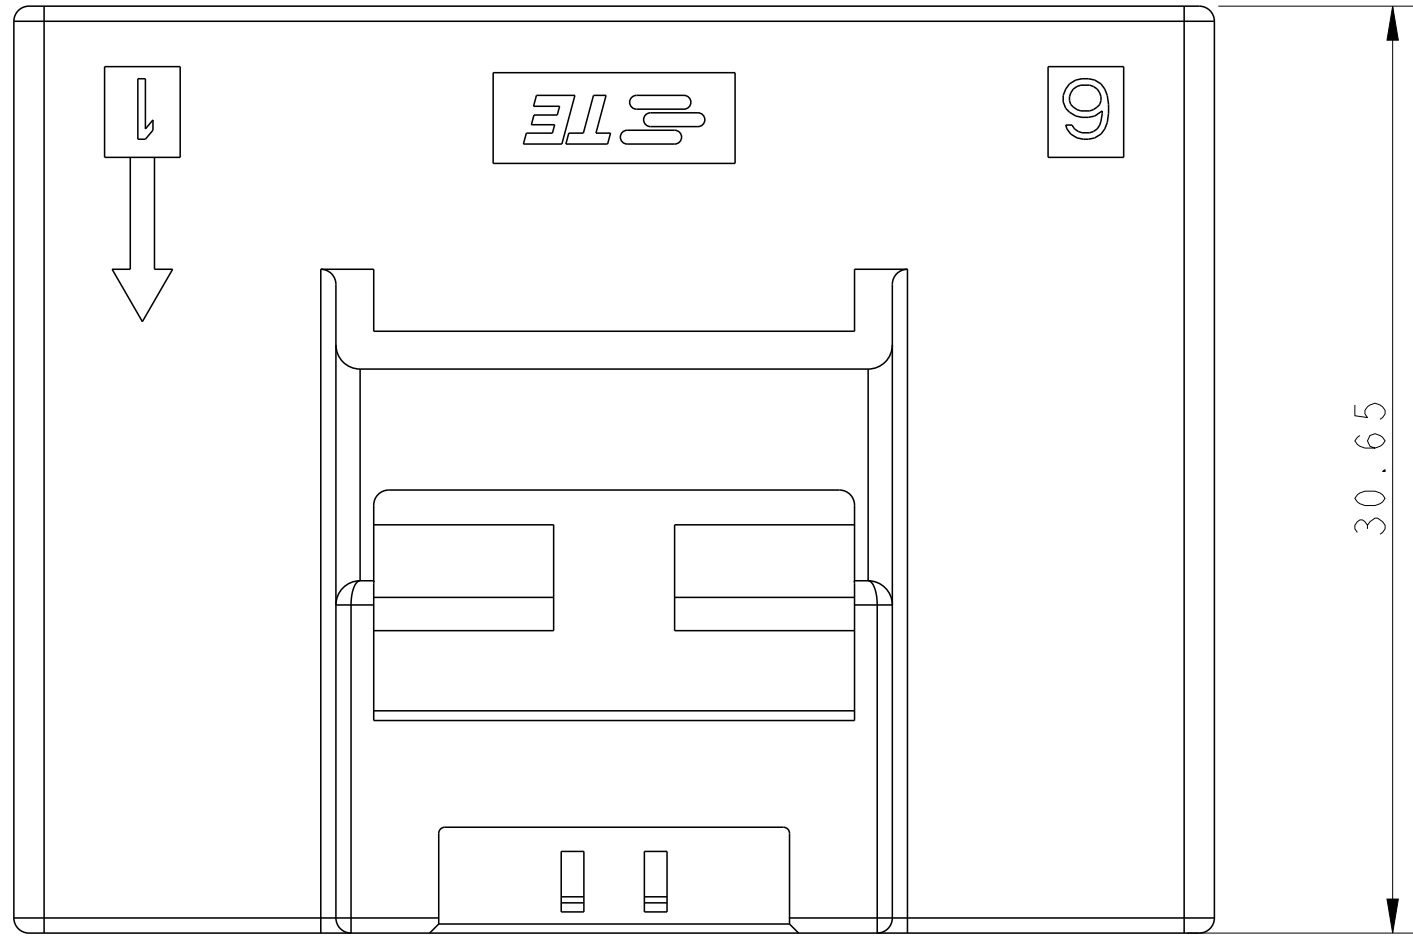

△ MATERIAL:
LEVEL 1:PBT, STANDARD TEMPERATURE 105°C
KEY A:NATURAL; KEY B:PURPLE; KEY C:BLUE; KEY D:YELLOW





LEVEL 2:NYLON, HIGH TEMPERATURE 150°C
KEY A:LIGHT GREY; KEY B:RED; KEY C:BLACK; KEY D:NATURAL

△ MATERIAL MARK:
LEVEL 1:PBT, LEVEL 2:HDT

3 APPLICABLE CONTACT P/N
TAB CONTACT:1971238/1971780/82/84/86/88-*,2238067-*

4 MATING CONN, P/N
PLUG HSG:*-1971776-
TPA(LOCK PLATE):*-1971778-*



5 THIS PRODUCT HAS NOT COMPLETED VALIDATION TESTING

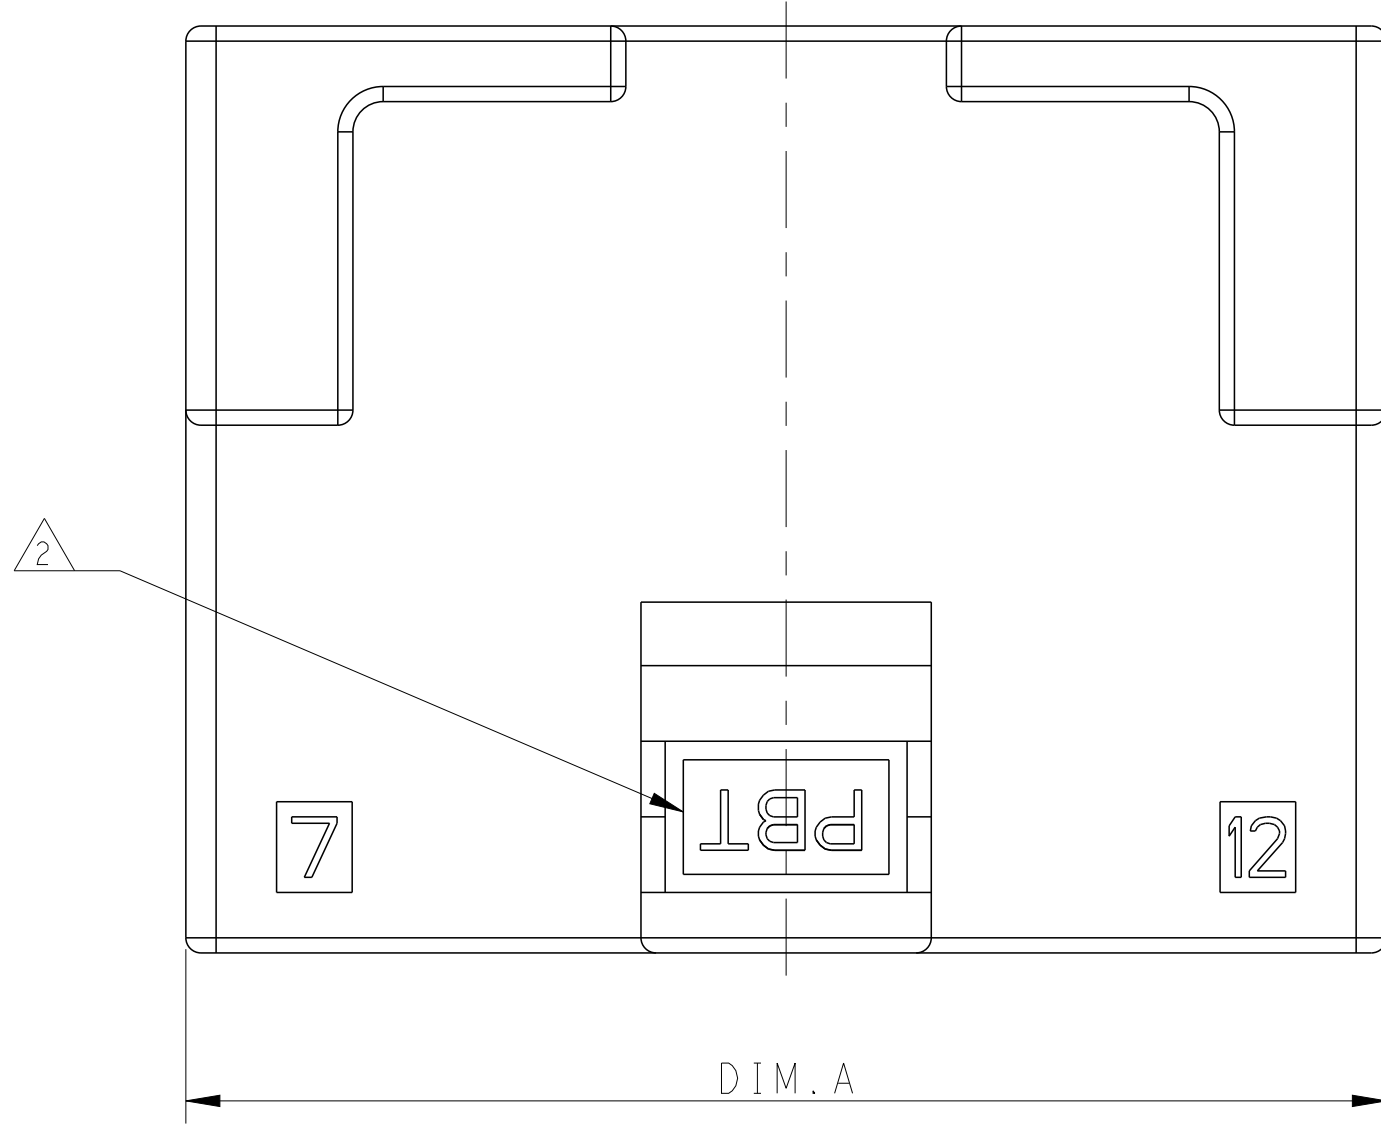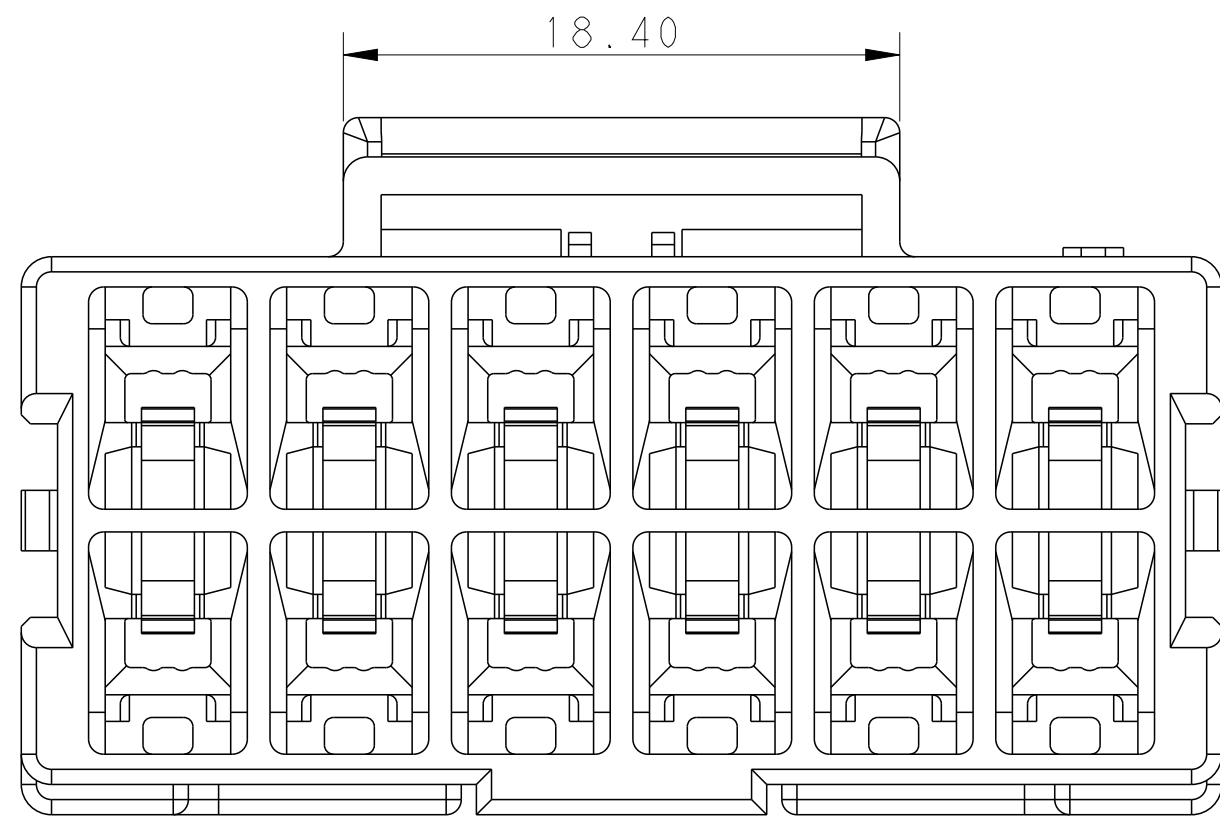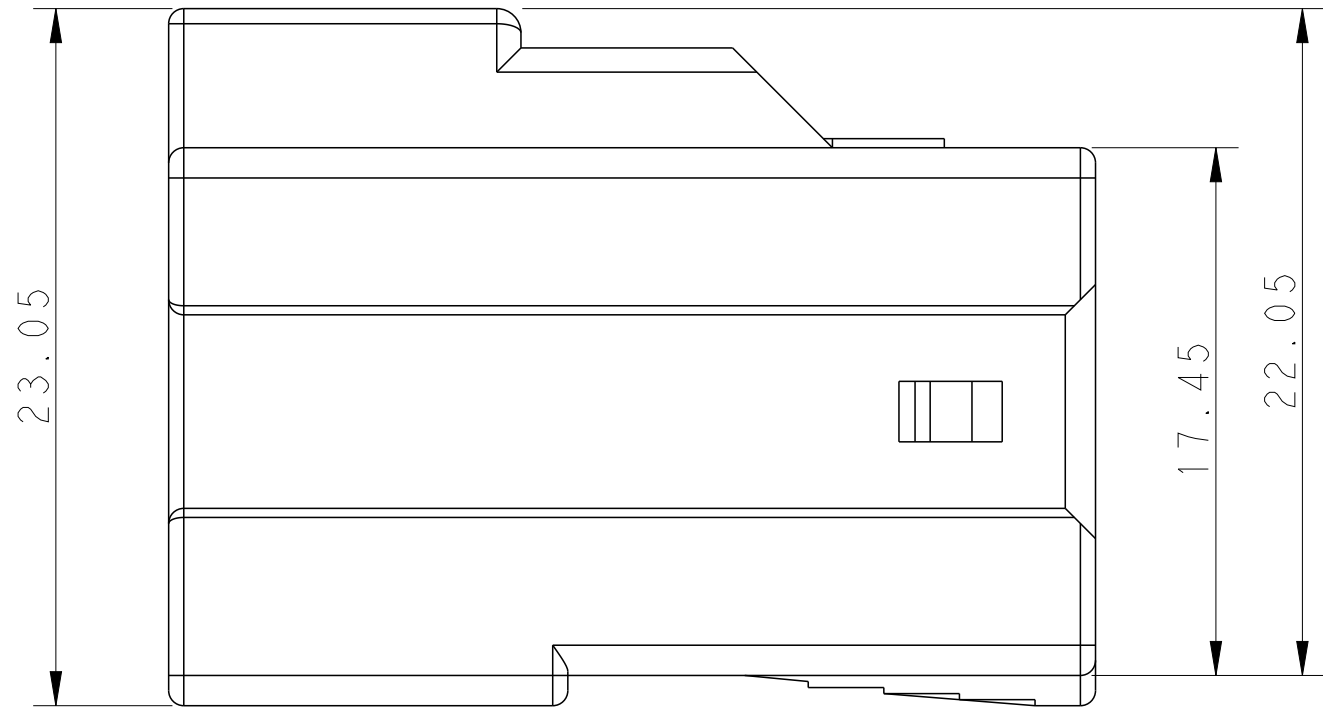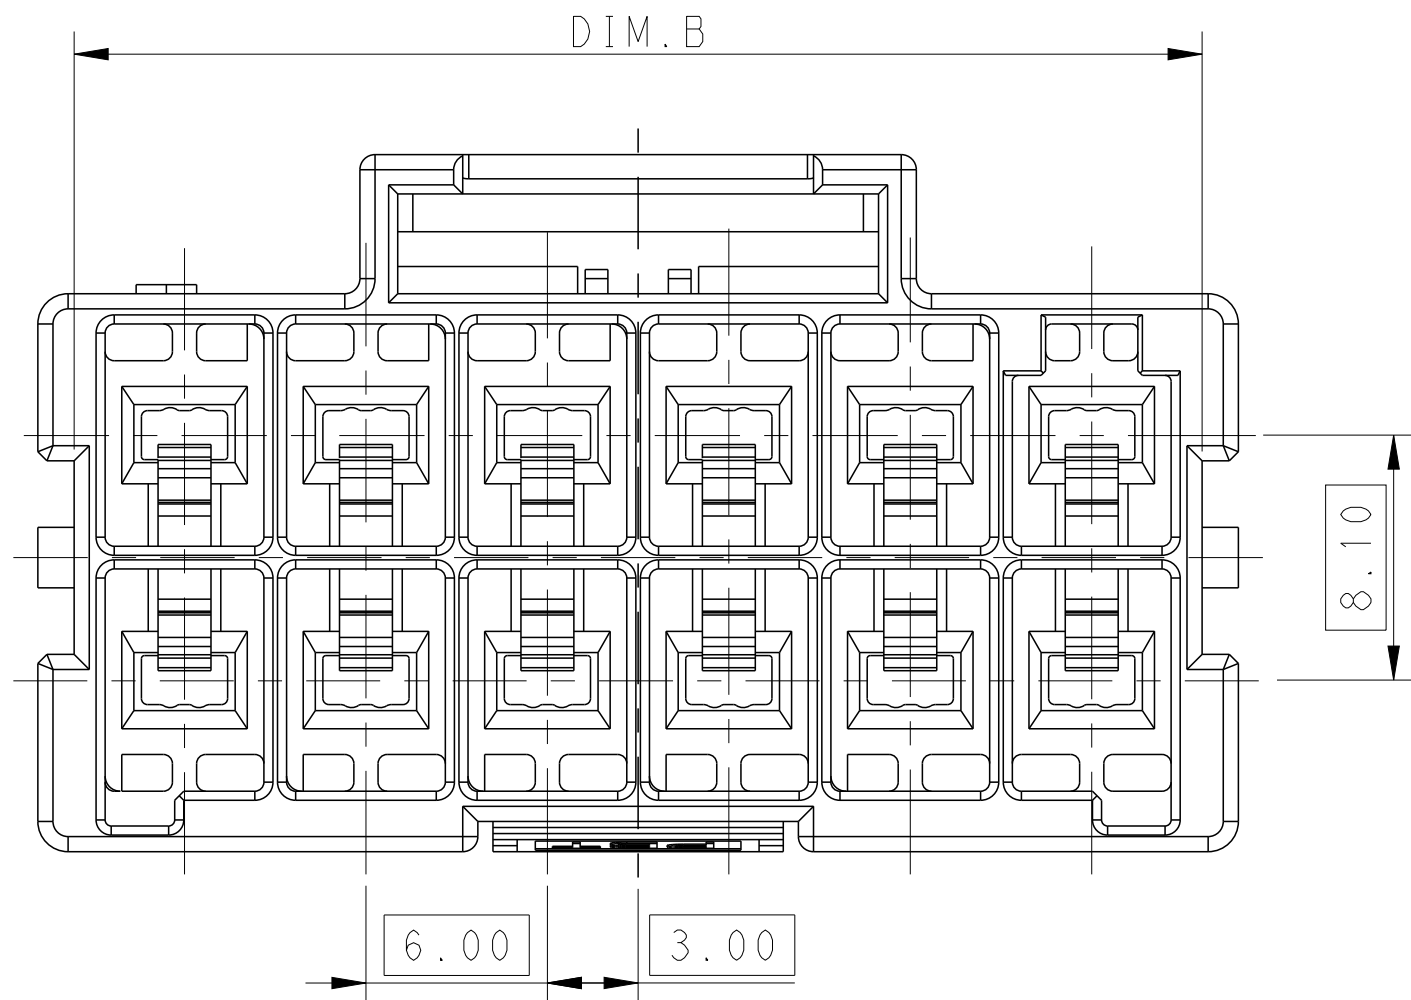



POS.	DIM.A	DIM.B
2*6	39.70	37.30
2*5	33.70	31.30
2*4	27.70	25.30
2*3	21.70	19.30

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN TOMMY WU 09JUL2012	 TE Connectivity		
DIMENSIONS:		CHK HAPYE WU 09JUL2012			
mm 	TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD YUHONG MAO 09JUL2012	NAME CAP HOUSING, FREE HANGING, DOUBLE ROW POWER TRIPLE LOCK	
	0 PLC ±: 1 PLC ±0.35 2 PLC ±0.25 3 PLC ±: 4 PLC ±: ANGLES ±: FINISH -		PRODUCT SPEC 108-106118 APPLICATION SPEC 114-106118	SIZE CAGE CODE DRAWING NO	
			WEIGHT -	A1 100779 C=1971774	
	MATERIAL 		Customer Drawing		SCALE - SHEET 1 OF 2 REV C



LOC		DIST		REVISONS			
P	LYR	DESCRIPTION			DATE	DWN	APVD
-	-	SEE SHEET 1			-	-	-

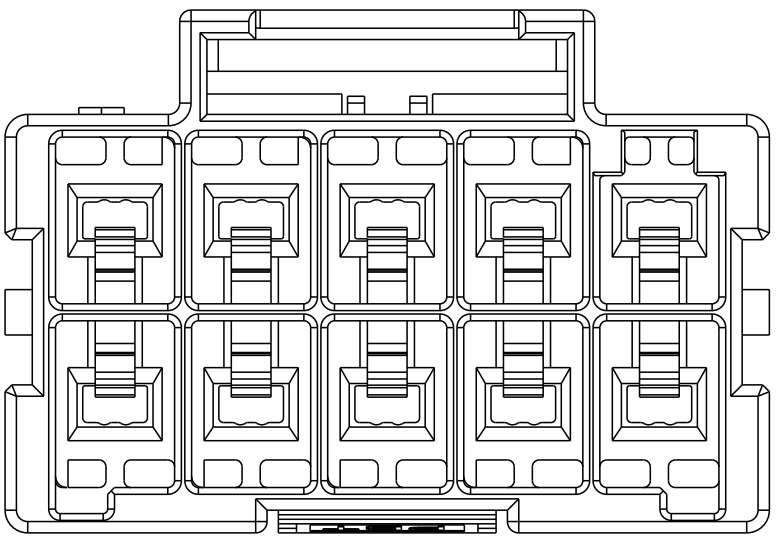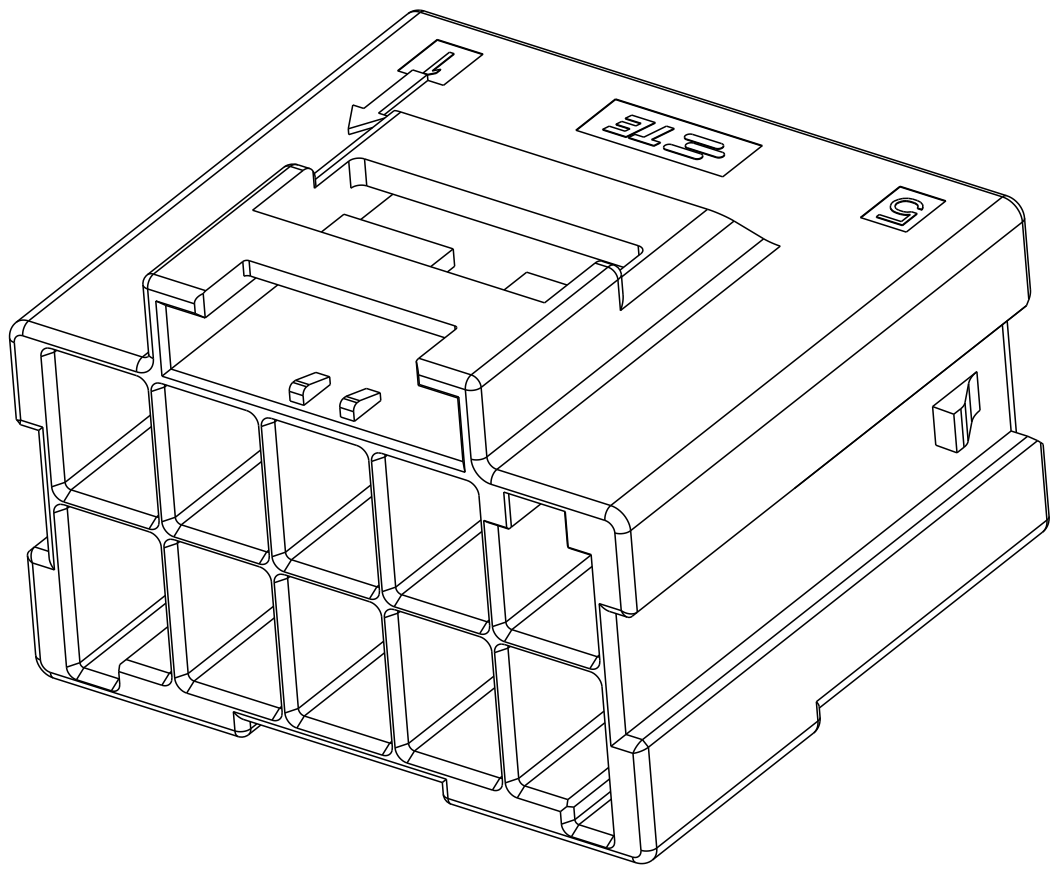


2*5 POSITIONS

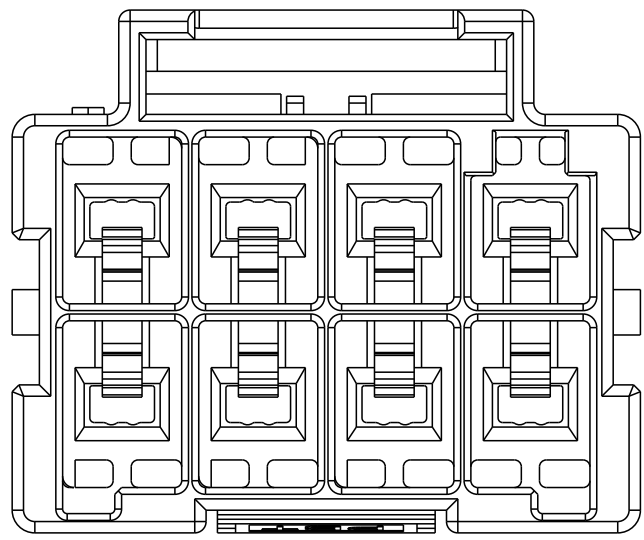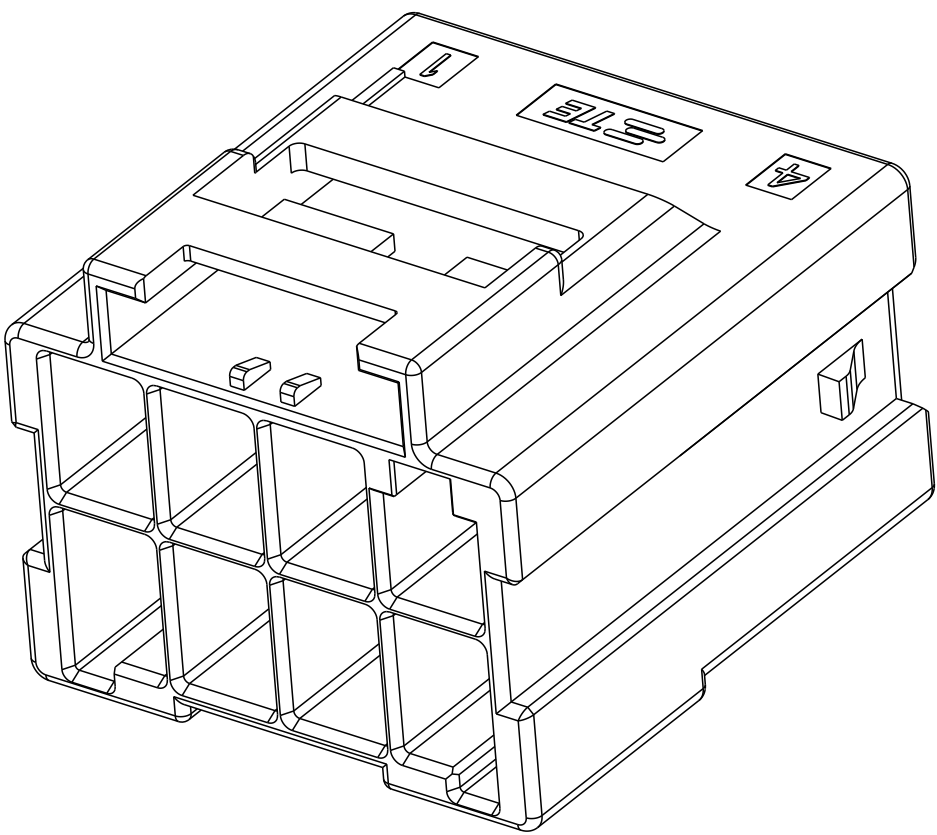


2*4 POSITIONS

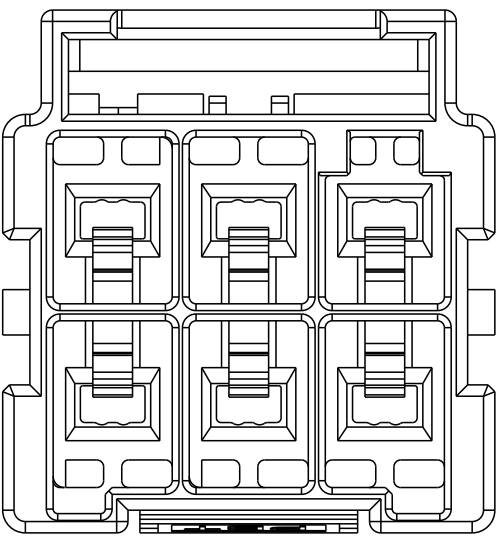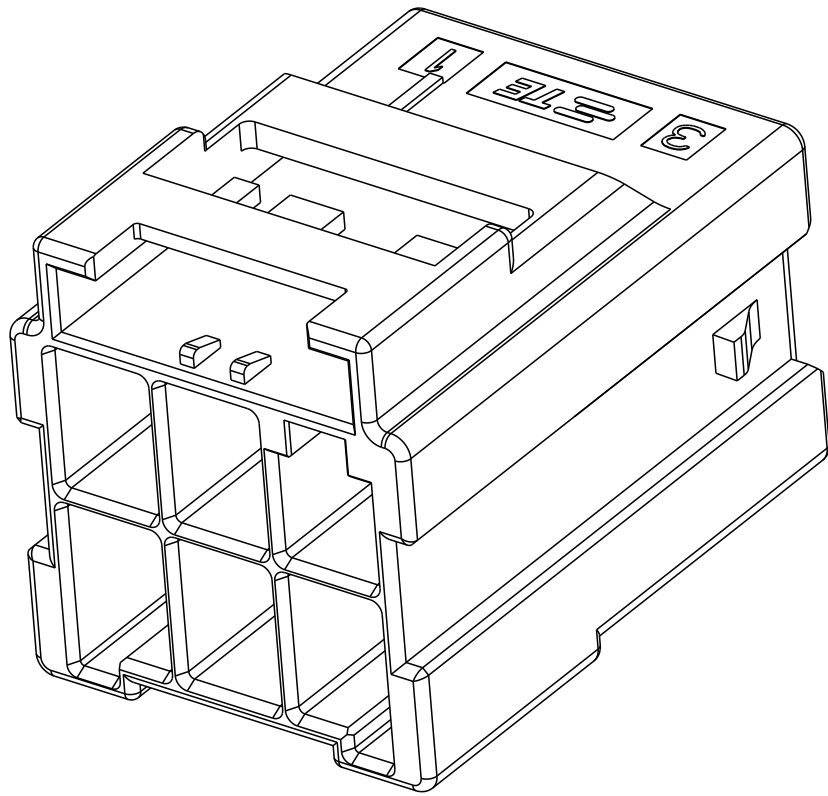


2*3 POSITIONS

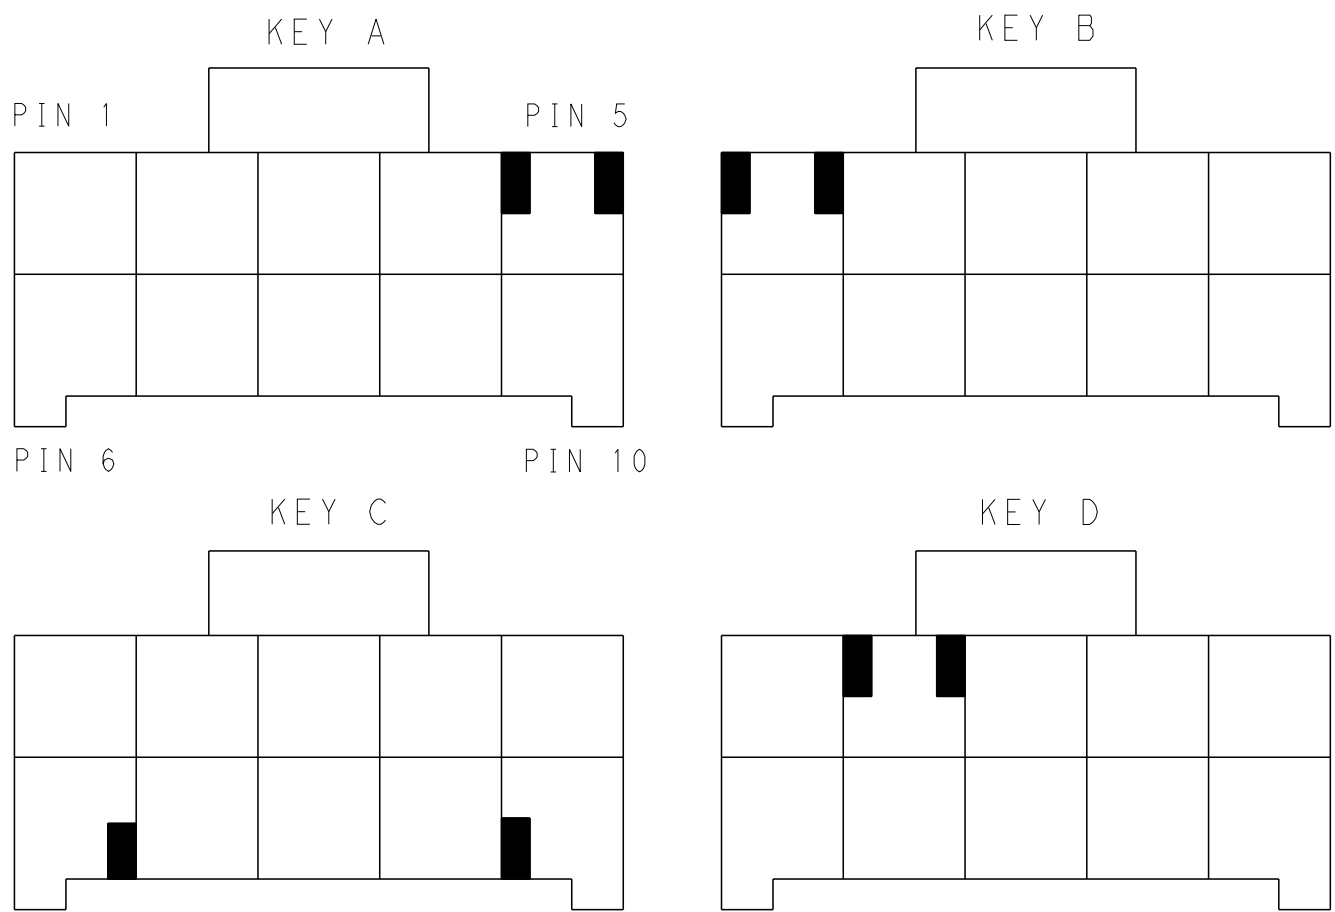



KEYING FOR 2*5 POS.

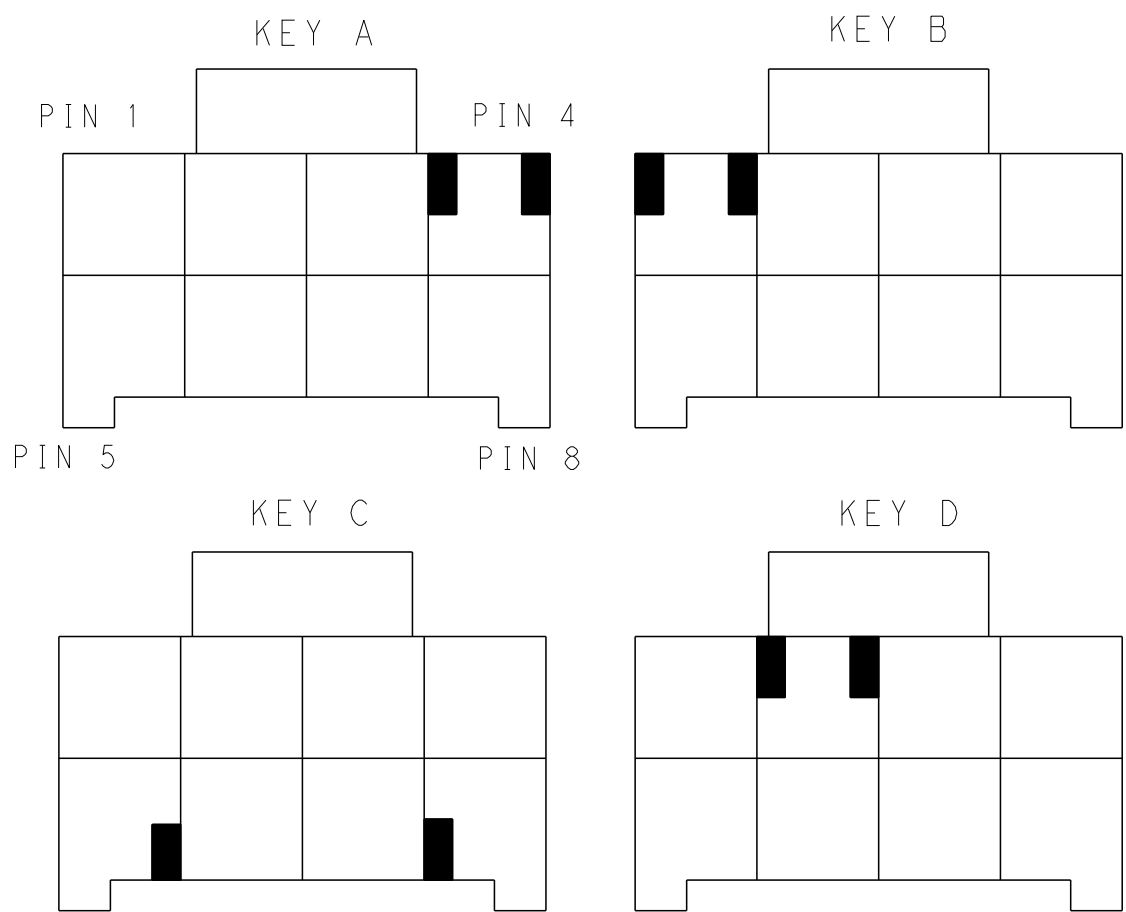


KEYING FOR 2*4 POS.

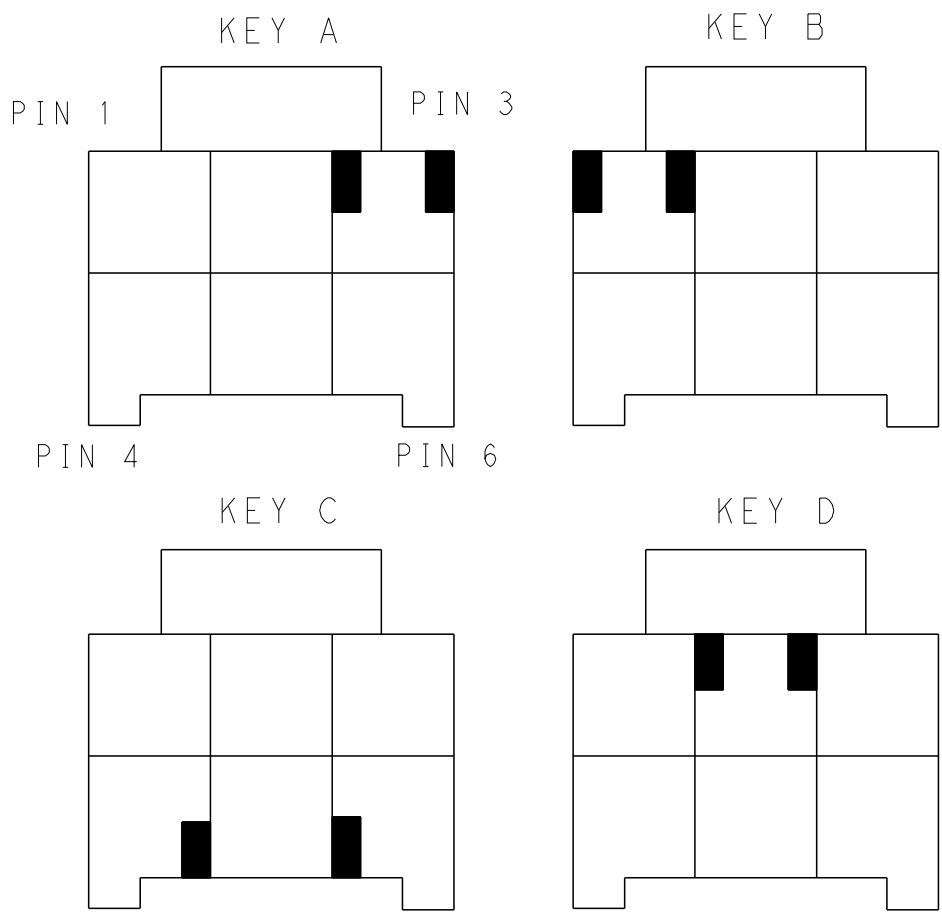

KEYING FOR 2*3 POS.

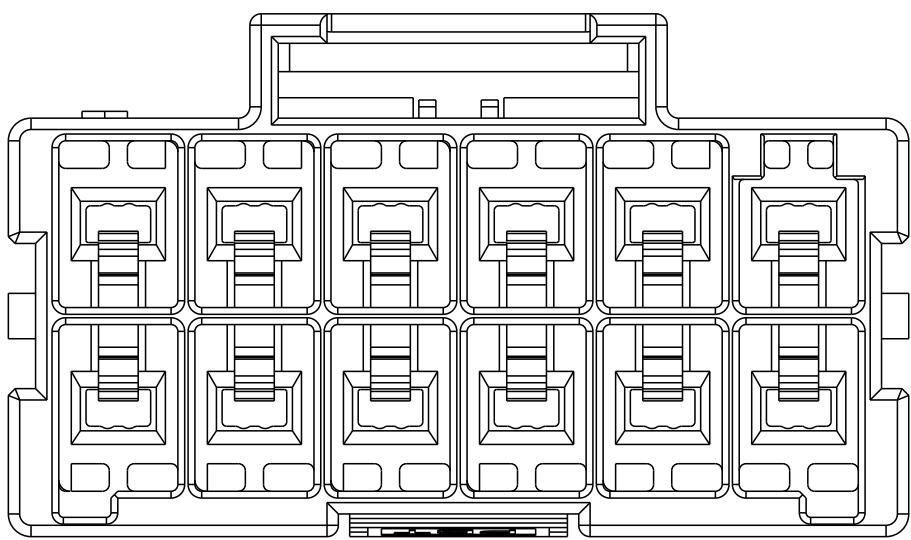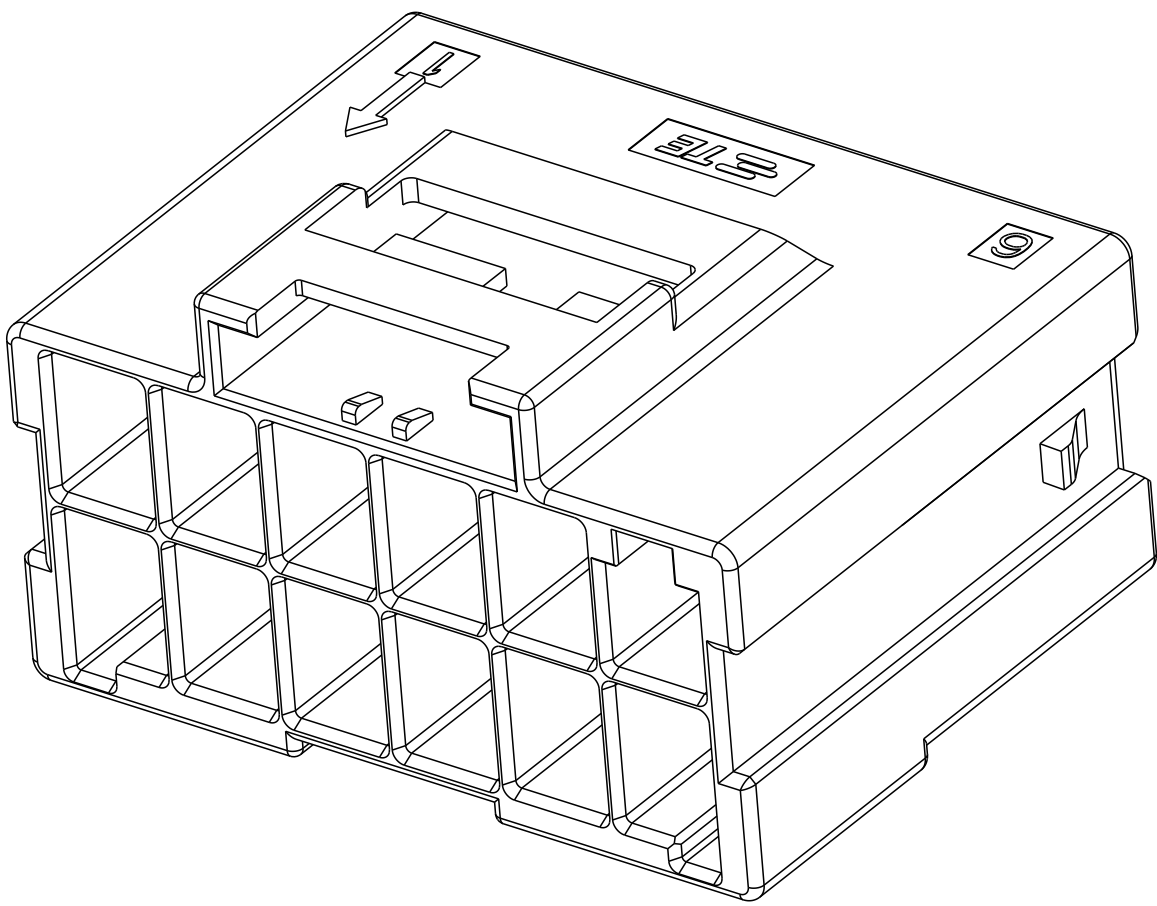

2*6 POSITIONS

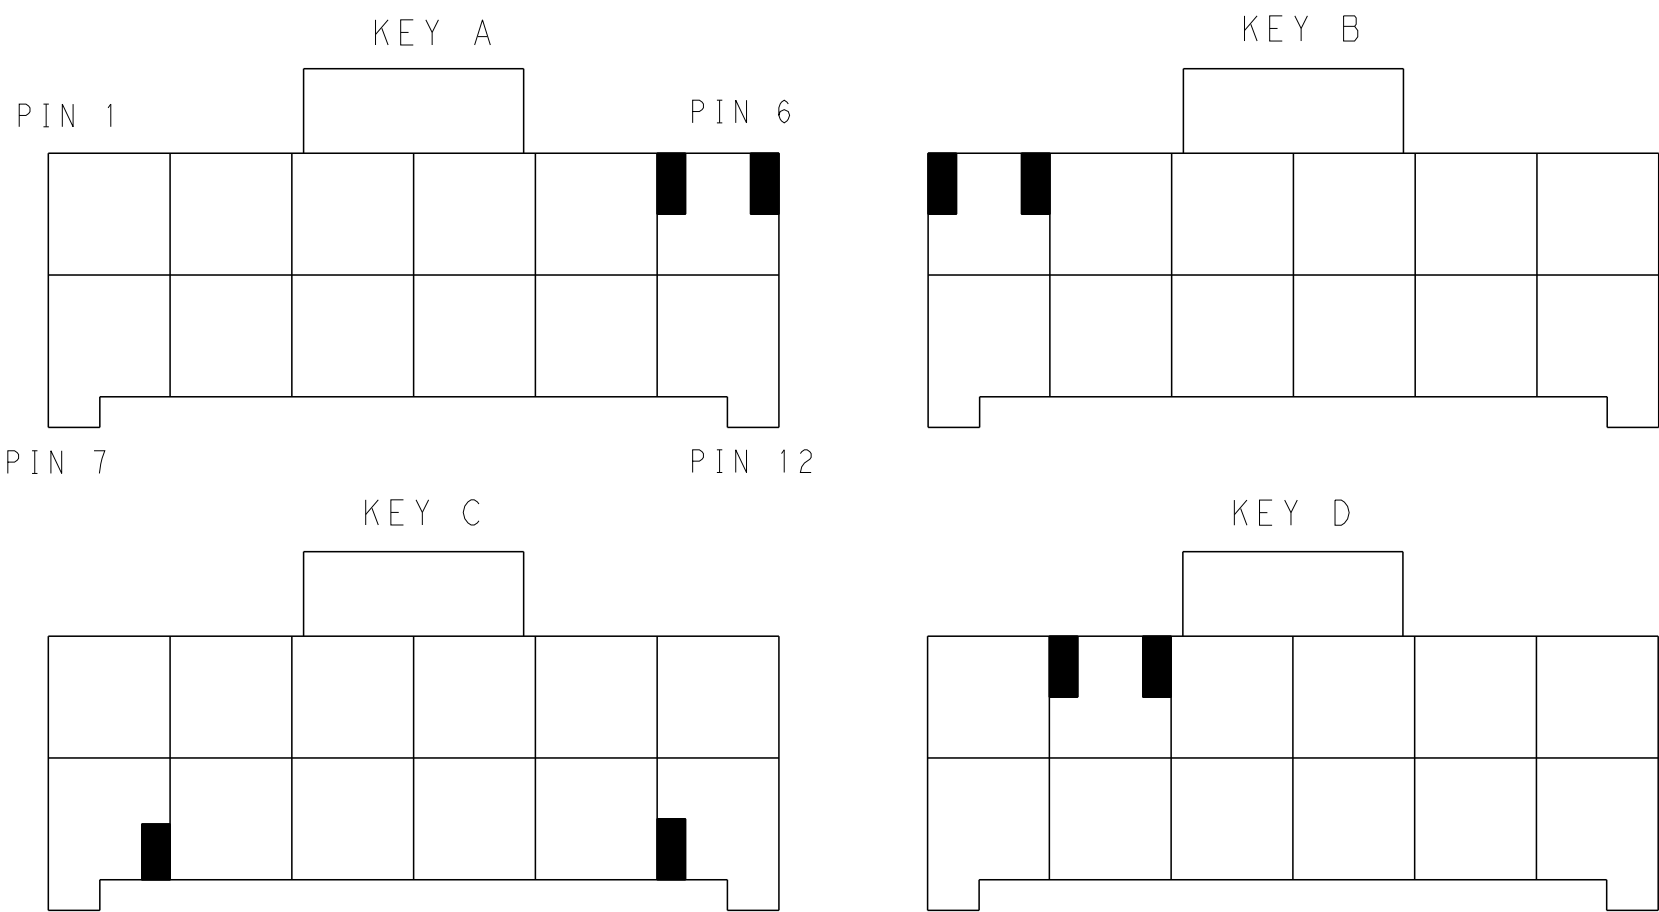

KEYING FOR 2*6 POS.

2*6	LEVEL 1	KEY A	1-1971774-6
		KEY B	2-1971774-6
		KEY C	3-1971774-6
		KEY D	4-1971774-6
2*5	LEVEL 2	KEY A	5-1971774-6
		KEY B	6-1971774-6
		KEY C	7-1971774-6
		KEY D	8-1971774-6
2*5	LEVEL 1	KEY A	1-1971774-5
		KEY B	2-1971774-5
		KEY C	3-1971774-5
		KEY D	4-1971774-5
2*5	LEVEL 2	KEY A	5-1971774-5
		KEY B	6-1971774-5
		KEY C	7-1971774-5
		KEY D	8-1971774-5
POS.	MATERIAL	KEY	P/N

2*4	LEVEL 1	KEY A	1-1971774-4
		KEY B	2-1971774-4
		KEY C	3-1971774-4
		KEY D	4-1971774-4
2*4	LEVEL 2	KEY A	5-1971774-4
		KEY B	6-1971774-4
		KEY C	7-1971774-4
		KEY D	8-1971774-4
2*3	LEVEL 1	KEY A	1-1971774-3
		KEY B	2-1971774-3
		KEY C	3-1971774-3
		KEY D	4-1971774-3
2*3	LEVEL 2	KEY A	5-1971774-3
		KEY B	6-1971774-3
		KEY C	7-1971774-3
		KEY D	8-1971774-3
POS.	MATERIAL	KEY	P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN TOMMY WU 09JUL2012
CHK HAPYE WU 09JUL2012
APVD YUZHONG MAO 09JUL2012

DIMENSIONS:

mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±.35
1 PLC ±0.25
2 PLC ±.25
3 PLC ±.25
4 PLC ±.25
ANGLES ±.25
FINISH -

MATERIAL

PRODUCT SPEC

108-106118

APPLICATION SPEC

114-106118

WEIGHT

-

Customer Drawing

TE Connectivity

CAP HOUSING, FREE HANGING, DOUBLE ROW POWER TRIPLE LOCK

SIZE CAGE CODE DRAWING NO

A100779C=1971774

RESTRICTED TO

-

SCALE

-

SHEET

2

OF

2

REV

C

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[6-1971774-5](#)