

THIS DRAWING IS UNPUBLISHED

RELEASED FOR PUBLICATION

—

© COPYRIGHT

By

ALL RIGHTS RESERVED

LOC

DIST	
------	--

REVISIONS

P

LIR

DESCRIPTION

DATE _____

DWRN

APVE

RD/SE



REF

ECO 14 000068


264

NK

AAA

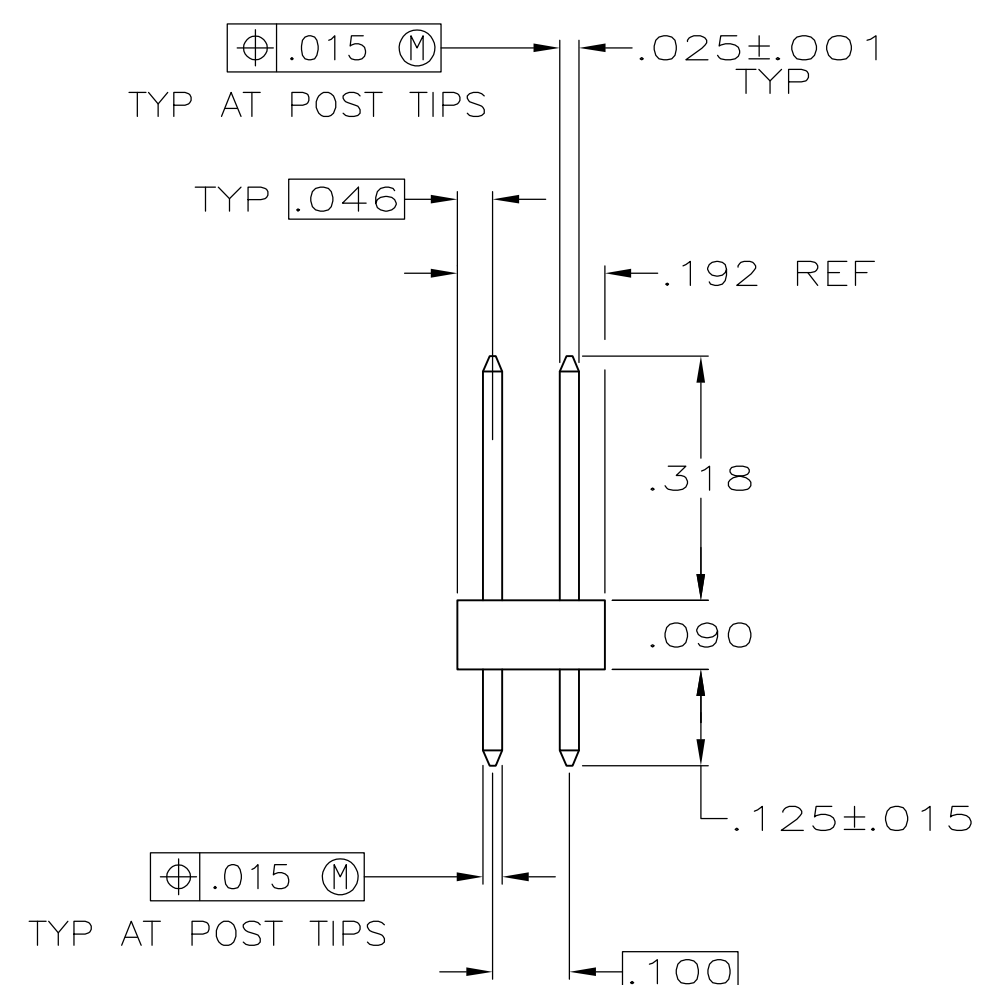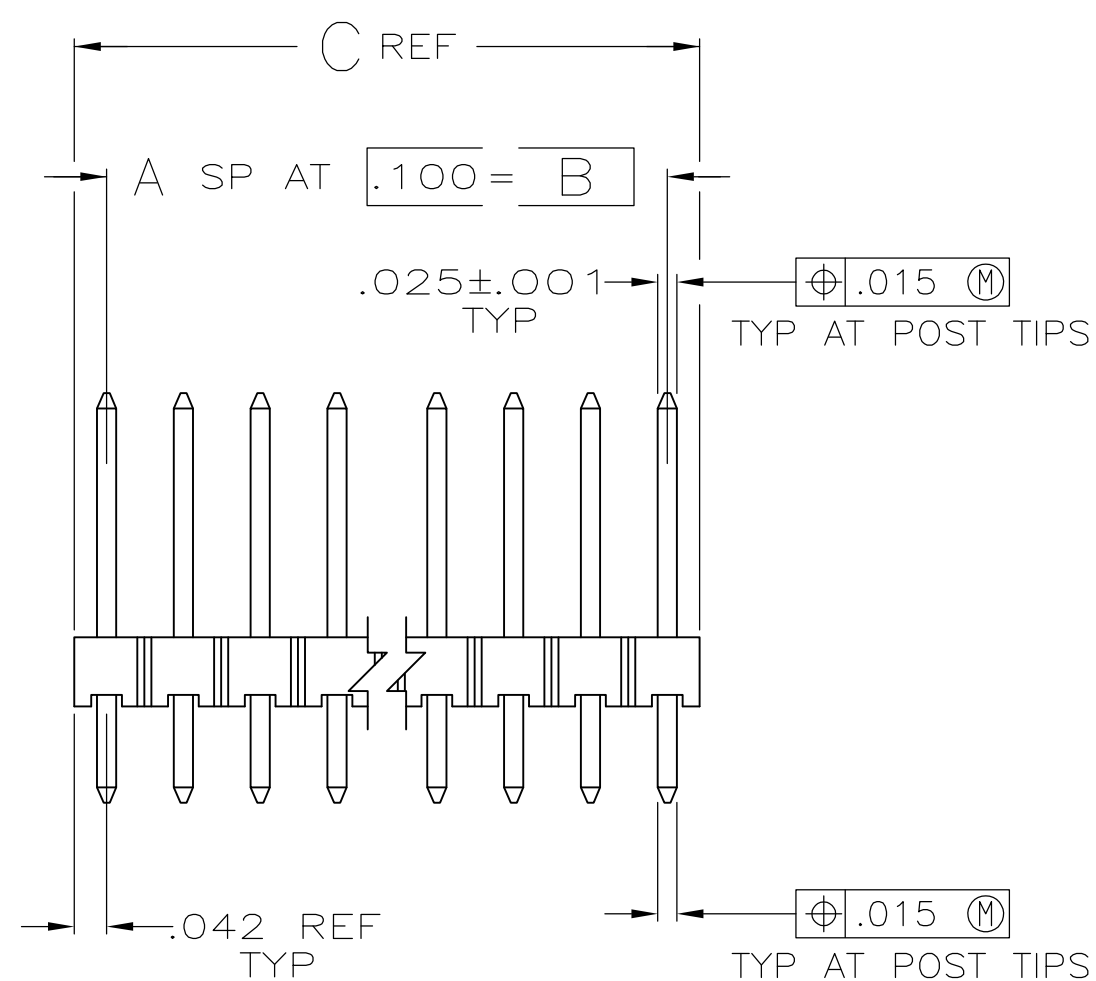


- | | |
|---|---|
| 1 | TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD |
| 2 | ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS |
| 3 | .000100-.000200 MATTE TIN-LEAD OVER .000050 NICKEL. |
| 4 | .000100-.000200 BRIGHT TIN OVER .000050 NICKEL. |
| 5 | PRELIMINARY PART - NOT RELEASED FOR PRODUCTION. |
| 6 | HOUSING MATERIAL: FLAME RETARDANT THERMOPLASTIC; COLOR-BLACK. |
| 7 | OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI |

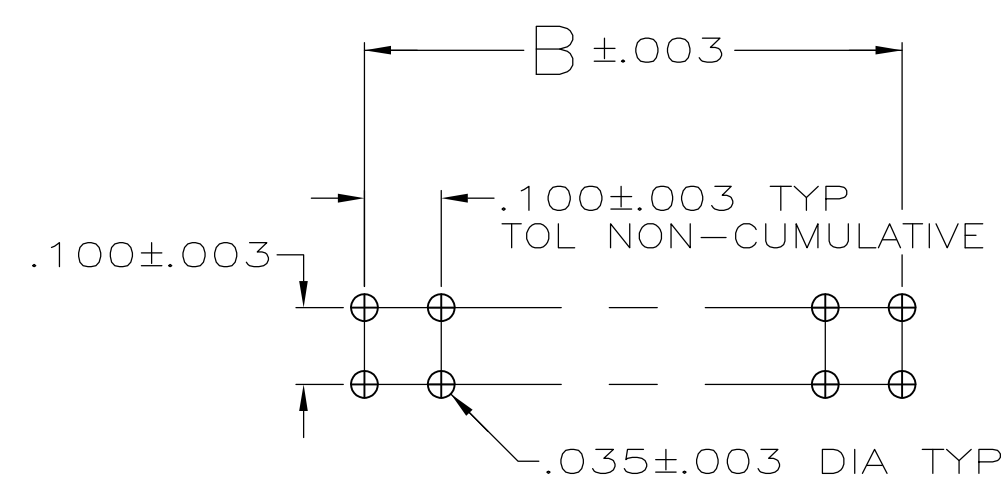

RECOMMENDED HOLE LAYOUT

		△	△	1.684	1.600	16	34	4-103322-7
		△	△	1.184	1.100	11	24	4-103322-6
		△	△	.584	.500	5	12	4-103322-5
	OBSOLETE	△	△	.284	.200	2	6	4-103322-4
		△	△	.084	—	—	2	4-103322-3
		△	△	3.984	3.900	39	80	4-103322-2
		△	△	.484	.400	4	10	4-103322-1
		△	△	3.984	3.900	39	80	4-103322-0
△	OBSOLETE	△	△	3.884	3.800	38	78	3-103322-9
△	OBSOLETE	△	△	3.784	3.700	37	76	3-103322-8
△	OBSOLETE	△	△	3.684	3.600	36	74	3-103322-7
△	SUPERSEDED BY 8-146250-6	△	△	3.584	3.500	35	72	3-103322-6
△	OBSOLETE	△	△	3.484	3.400	34	70	3-103322-5
△	OBSOLETE	△	△	3.384	3.300	33	68	3-103322-4
△	OBSOLETE	△	△	3.284	3.200	32	66	3-103322-3
△	OBSOLETE	△	△	3.184	3.100	31	64	3-103322-2
△	OBSOLETE	△	△	3.084	3.000	30	62	3-103322-1
△	OBSOLETE	△	△	2.984	2.900	29	60	3-103322-0
△	OBSOLETE	△	△	2.884	2.800	28	58	2-103322-9
△	OBSOLETE	△	△	2.784	2.700	27	56	2-103322-8
△	OBSOLETE	△	△	2.684	2.600	26	54	2-103322-7
△	OBSOLETE	△	△	2.584	2.500	25	52	2-103322-6
		△	△	2.484	2.400	24	50	2-103322-5
△	OBSOLETE	△	△	2.384	2.300	23	48	2-103322-4
△	OBSOLETE	△	△	2.284	2.200	22	46	2-103322-3
△	OBSOLETE	△	△	2.184	2.100	21	44	2-103322-2
△	OBSOLETE	△	△	2.084	2.000	20	42	2-103322-1
△	SUPERSEDED BY 7-146250-0	△	△	1.984	1.900	19	40	2-103322-0
△	OBSOLETE	△	△	1.884	1.800	18	38	1-103322-9
△	OBSOLETE	△	△	1.784	1.700	17	36	1-103322-8
△	OBSOLETE	△	△	1.684	1.600	16	34	1-103322-7
△	OBSOLETE	△	△	1.584	1.500	15	32	1-103322-6
△	OBSOLETE	△	△	1.484	1.400	14	30	1-103322-5
△	OBSOLETE	△	△	1.384	1.300	13	28	1-103322-4
△	OBSOLETE	△	△	1.284	1.200	12	26	1-103322-3
△	OBSOLETE	△	△	1.184	1.100	11	24	1-103322-2
△	OBSOLETE	△	△	1.084	1.000	10	22	1-103322-1
△	SUPERSEDED BY 6-146250-0	△	△	.984	.900	9	20	1-103322-0
△	OBSOLETE	△	△	.884	.800	8	18	103322-9
△	OBSOLETE	△	△	.784	.700	7	16	103322-8
		△	△	.684	.600	6	14	103322-7
		△	△	.584	.500	5	12	103322-6
		△	△	.484	.400	4	10	103322-5
		△	△	.384	.300	3	8	103322-4
		△	△	.284	.200	2	6	103322-3
		△	△	.184	.100	1	4	103322-2
△	SUPERSEDED BY 5-146250-1	△	△	.084	—	—	2	103322-1

		PLATING	C	B	A	NO OF POSN	PART NUMBER
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. MARTINELLI	150C192	 TE Connectivity			
DIMENSIONS:		OK JOHN KNITTLE	23NOV92				
INCHES		APVD B. FLINCHBAUGH	23NOV92				
DIMENSIONS: INCHES 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PL/C ± - 1 PL/C ± - 2 PL/C ± - 3 PL/C ± .005 4 PL/C ± - 5 PL/C ± - 6 PL/C ± -		NAME ASSEMBLY, HEADER, BREAKAWAY, MOD II, DOUBLE ROW, .100 X .100 C/L, VERTICAL WITH .025 SQUARE POSTS			
MATERIAL POST: COPPER ALLOY 		FINISH SEE TABLE		PRODUCT SPEC — APPLICATION SPEC —		SIZE A1	
		WEIGHT —		CASE CODE 00779		DRAWING NO C=103322	
		CUSTOMER DRAWING		SCALE 4:1		SHEET 1 OF 1	
				REV			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[103322-7](#)