


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
B1	-		C3	REVISED PER ECO-11-005150	31MAR2011	RK	HMR
			C4	ECR-11-021594	11NOV2011	RK	MKO
			C5	ECR-14-007793	25AUG2014	RK	MKO
			C6	REVISED PER ECR-16-016780	19AUG2017	NG	MKO

1	MATERIAL: BRASS
2	FINISH SILVER PLATING: 2 µm Ag MIN. OVER Cu
3	FINISH GOLD PLATING: 0.75 µm Au MIN. OVER Ni
4	WEIGHT (MAX.): 6.44 g, VOLUME (MAX.): 795mm ² (APPROX.)
5	SUITABLE PIN CONTACT: CUSTOMER DRAWING 1105150
6	SUITABLE INSERTS: SERIES HSS, CUSTOMER DRAWING
7	SUITABLE CRIMP TOOL: PN 1-1105850-8
8	SUITABLE INSERTION TOOL: -
9	SUITABLE EXTRACTION TOOL: PN 0-1102855-5
10	FINE WIRE DIA. MAX. Ø4.5
11	STANDARDS: DIN EN 61984, DIN EN 60664-1
12	PACKAGING: 25 PIECES IN A POLY-BAG
13	PACKAGING: 1 PIECE LOOSE



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 10APR2008 K.SCHROEDER CHK 10APR2008 H.BRAUN APVD 10APR2008 T.SCHNURPFIL		TE Connectivity			
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME			
mm				SOCKET CONTACT SERIES HSS			
		0 PLC ±		PRODUCT SPEC 108-74016 APPLICATION SPEC 114-74028			
		1 PLC ±					
		2 PLC ±					
		3 PLC ±		SIZE CAGE CODE DRAWING NO RESTRICTED TO			
		4 PLC ±					
ANGLES ±0.5°		FINISH		114-74028 WEIGHT - A2 00779 C=1105151			
MATERIAL				Customer Drawing SCALE 5:1 SHEET 1 of 1 REV C6			

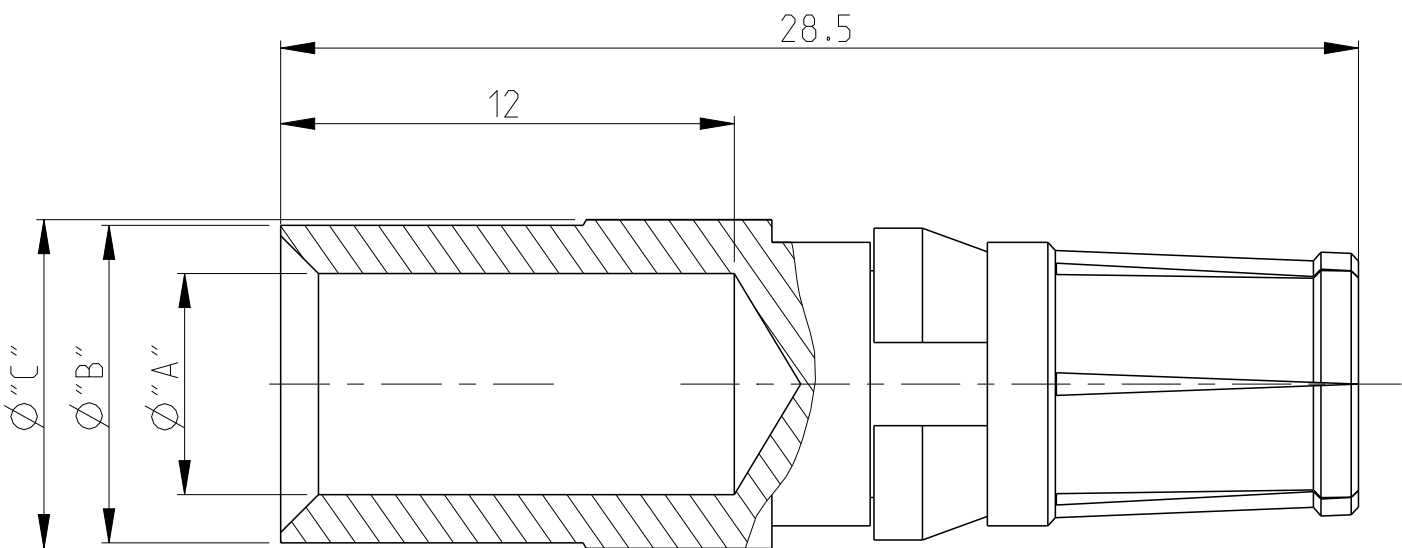

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-1105151-2](#)