


### Micro Relay A/VFMA

- High current version with limiting continuous current 30A at 85°C
- Pin assignment according to ISO 7588 part 3
- Customized versions on request
  - 24VDC versions with special contact gap
  - Integrated components (e.g. diode)
  - Customized marking
  - Special covers (e.g. notches, release features)
  - For latching version refer to Micro Relay Latching
  - For low noise version refer to Micro Relay Low Noise
  - For high current version refer to part number table

#### Typical applications

Cross carline up to 30A for example: ABS control, blower fans, cooling fan, door control, door lock, fuel pump, heated front screen, immobilizer, interior lights, seat control, seatbelt pretensioner, sun roof, trunk lock, valves, window lifter, wiper control.

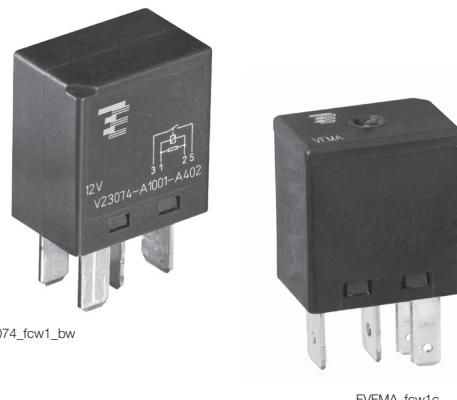


F074\_fcw1\_bw

VFMA\_fcw1c

Contact Data	Form A Standard	Form C	Form A HC	Form C HC
Contact arrangement	1 form A, 1 NO	1 form A, 1 NO	1 form C, 1 CO	1 form A, 1 NO
Rated voltage	12VDC	24VDC	12VDC	24VDC <sup>6)</sup>
Limiting continuous current, form A/form B		NO/NC	NO/NC	
23°C	30A	30A	30/20A	35A
85°C	25A	25A	25/15A	30A
125°C	10A	10A	10/8A	15A
Limiting making current <sup>1/2)</sup> , A/B (NO/NC)	120A	120A	120/40A	120A
Limiting breaking current	30A	20A	30/15A	20/10A
Limiting short-time current, overload current, ISO 8820-3 <sup>3)</sup>	1.35 x 25A, 1800s 2.00 x 25A, 5s 3.50 x 25A, 0.5s 6.00 x 25A, 0.1s	1.35 x 25A, 1800s 2.00 x 25A, 5s 3.50 x 25A, 0.5s 6.00 x 25A, 0.1s	1.35 x 30A, 1800s 2.00 x 30A, 5s 3.50 x 30A, 0.5s 6.00 x 30A, 0.1s	1.35 x 30A, 1800s 2.00 x 30A, 5s 3.50 x 30A, 0.5s 6.00 x 30A, 0.1s
Jump start test	24VDC for 5min conducting nominal current at 23°C			
Contact material	silver based			
Min. recommended contact load <sup>4)</sup>	1A at 5VDC			
Initial voltage drop	15/200mV			
NO contact at 10A, typ./max.	15/200mV			
NC contact at 10A, typ./max.	20/250mV			
Frequency of operation	6 ops./min (0.1Hz)			
Electrical endurance <sup>5)</sup>				
resistive load at 14VDC	>1x10 <sup>5</sup> ops. 25A	>1x10 <sup>5</sup> ops. 25A (NO)	>1x10 <sup>5</sup> ops. 30A	
resistive load at 28VDC	>1x10 <sup>5</sup> ops. 15A	>1x10 <sup>5</sup> ops. 15A (NO)	>1x10 <sup>5</sup> ops. 10A (NC)	
Mechanical endurance	typ. 10 <sup>7</sup> ops.			

#### Max. DC load breaking capacity

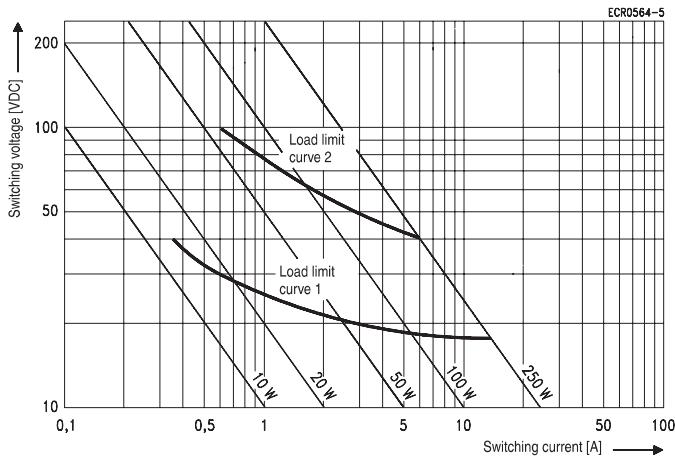

- 1) The values apply to a resistive or inductive load with suitable spark suppression and at maximum 13.5VDC for 12VDC or 27VDC for 24VDC load voltages.
- 2) For a load current duration of maximum 3s for a make/break ratio of 1:10.
- 3) Current and time are compatible with circuit protection by a typical automotive fuse. Relay will make, carry and break the specified current.
- 4) See chapter Diagnostics of Relays in our Application Notes or consult the internet at <http://relays.te.com/appnotes/>
- 5) Electrical endurance data is not valid for diode versions. Any diode or pn-junction parallel to the coil (internal or external) will significantly decrease the electrical lifetime, especially when used for inductive loads.
- 6) Not applicable for polarity reverse loads like power windows

Load limit curve 1: arc extinguishes during transit time (CO contact).

Load limit curve 2: safe shutdown, no stationary arc (NO contact).

Load limit curves measured with low inductive resistors verified for 1000 switching events.

**Micro Relay A/VFMA (Continued)**
**Coil Data**


Coil voltage range 12/24VDC

**Coil versions, DC coil**

Coil code	Rated voltage VDC	Operate voltage VDC	Release voltage VDC	Coil resistance <sup>7)</sup> $\Omega \pm 10\%$	Rated coil power <sup>7)</sup> W
001	12	7.2	1.6	119	1.20
002	24	14.4	3.6	430	1.34
005	12	7.2	1.6	144	1.00
F	12	7.2	1.2	90	1.60
H	24	14.4	3.6	430	1.34

All figures are given for coil without pre-energization, at ambient temperature +23°C.

7) Without components in parallel.

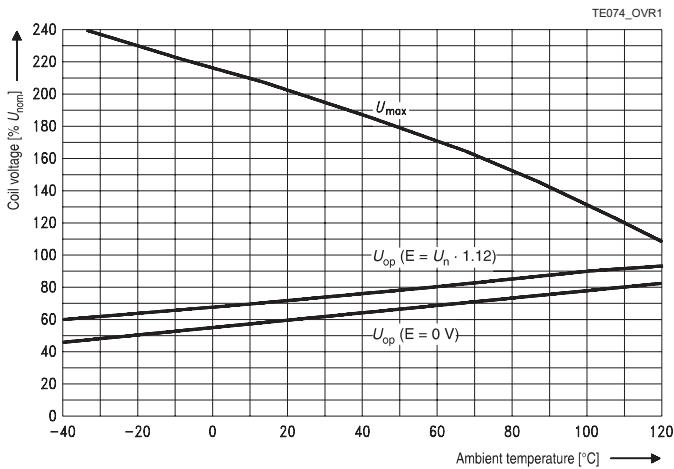**Coil operating range**



Does not take into account the temperature rise due to the contact current  
E = pre-energization.

**Insulation Data**


Initial dielectric strength between open contacts	500VAC <sub>rms</sub>
between contact and coil	500VAC <sub>rms</sub>
Load dump test	
ISO 7637-1 (12VDC), test pulse 5	V <sub>s</sub> =+86.5VDC
ISO 7637-2 (24VDC), test pulse 5	V <sub>s</sub> =+200VDC

**Terminal Assignment**


NOD  
1 form A, 1 NO with diode




NOR  
1 form A, 1 NO with resistor



COD  
1 form C, 1 CO with diode




COR  
1 form C, 1 CO with resistor




**Micro Relay A/VFMA** (Continued)

**Dimensions**

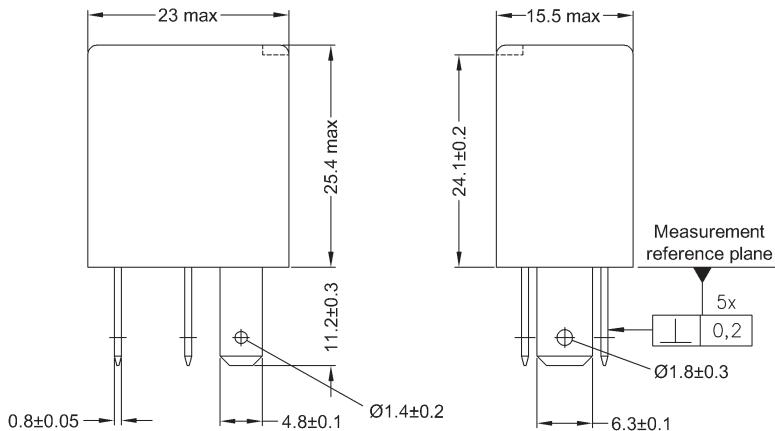

Quick connect terminal similar to ISO 8092-1.  
Micro A: Terminals without holes  
VFMA: Terminals with holes

View of the terminals (bottom view)

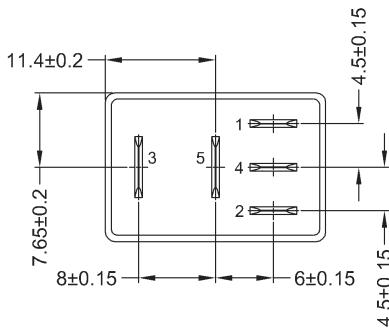

Positional tolerances:  0,15

### Micro Relay A/VFMA (Continued)

#### Product code structure

Type		V23074 Micro Relay A		Typical product code	V23074	-A	1	001	-A4	02
Version		A Standard		H	High current					
Coil suppression		1 Resistor		2	Diode					
Coil		001	12VDC	002	24VDC	005	12VDC for high current version			
Contact material		-A4 Silver based		-A5	Silver based for high current version					
Contact arrangement		02	1 form A, 1 NO	03	1 form C, 1 CO					

#### Product code structure

Type	VFMA VFMA Series	Typical product code	VFMA	-1	1	F	4	1	-S01
Version	1 Standard								
Contact arrangement	1 1 form A, 1 NO	5 1 form C, 1 CO							
Coil	F 12VDC	H 24VDC							
Contact material	4 Silver based	7 Silver based for high current version							
Terminals	1 Plug-in								
Coil suppression	S01 Resistor								

Product code	Equivalent to	Version	Coil suppr.	Circuit <sup>1)</sup>	Cover Color	Coil	Arrangement	Terminals	Part number
V23074-A1001-A402	VFMA-11F41-S01	Standard	Resistor 680Ω	NOR	Black	12VDC	1 form A, 1 NO	Plug-in, QC	4-1904124-2
VFMA-11F41-S01	V23074-A1001-A402			COR			1 form C, 1 CO		9-1393292-9
V23074-A1001-A403	VFMA-15F41-S01								4-1904124-3
VFMA-15F41-S01	V23074-A1001-A403								1393293-8
V23074-A2001-A402	V23074-A2201-X147		Diode	NOD			1 form A, 1 NO		5-1393292-8
V23074-A2201-X147	V23074-A2001-A402				Blue				5-1904135-9
V23074-A2001-A403	V23074-A2101-X148			COD	Black		1 form C, 1 CO		6-1419137-4
V23074-A2101-X148	V23074-A2001-A403				Red				6-1904135-0
V23074-H1005-A502		High current	Resistor 1000Ω	NOR	Black		1 form A, 1 NO		4-1904124-4
V23074-A1002-A402	VFMA-11H41-S01	Standard	Resistor 1800Ω			24VDC			8-1393292-9
VFMA-11H41-S01	V23074-A1002-A402			COR			1 form C, 1 CO		6-1415008-2
V23074-A1002-A403							1 form A, 1 NO		3-1393292-8
V23074-A2002-A402			Diode	NOD					6-1393292-2
V23074-A2002-A403				COD			1 form C, 1 CO		6-1393292-3

1) See terminal assignment diagrams.

Other types on request.

This list represents the most common types and does not show all variants covered by this datasheet.

#### Production in Asia (only)

Product code	Version	Coil suppression	Circuit <sup>1)</sup>	Cover Color	Coil	Arrangement	Terminals	Part number
V23074-A1001-A402	Standard	Resistor 680Ω	NOR	Black	12VDC	1 form A, 1 NO	Plug-in, QC	1393292-5
V23074-A1001-A403			COR			1 form C, 1 CO		8-1393292-4
V23074-A2001-A402		Diode	NOD			1 form A, 1 NO		2-1904111-7
V23074-A2001-A403			COD			1 form C, 1 CO		9-1904105-7
V23074-H1005-A502	High current	Resistor 1000Ω	NOR			1 form A, 1 NO		2-1414971-4

1) See terminal assignment diagrams.

Other types on request.

This list represents the most common types and does not show all variants covered by this datasheet.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[V23074A2002A403](#)