

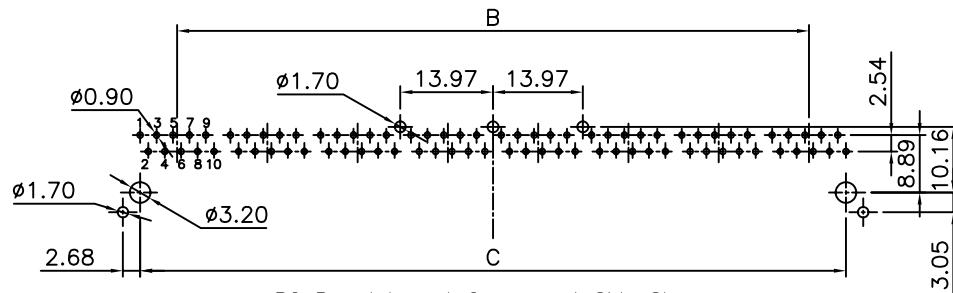
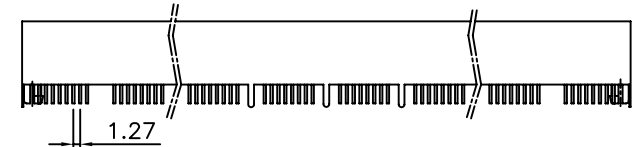



A1RFRD10


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD
△		MODIFY DRAWING	ANKUE 7/08/06	

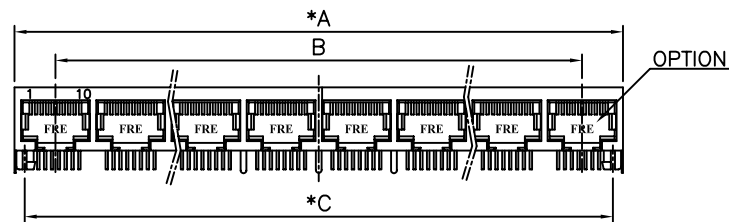

PC Board Layout Component Side Shown

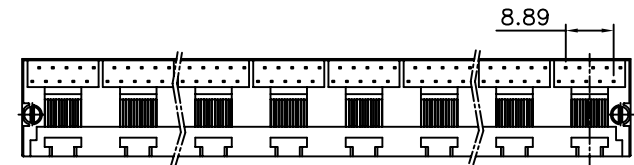

(FRE TYPE)

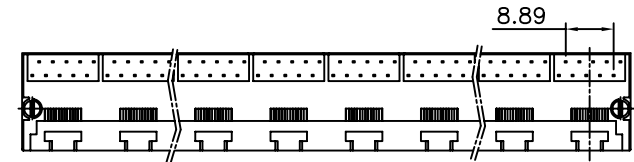

(MAXTOP TYPE)

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP
- CONTACT RESISTANCE : 45 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

- HOUSING MATERIAL : PBT+GF30% UL94V-0. COLOR:BLACK
- INSERT MATERIAL : PBT+GF30% UL94V-0. COLOR:BLACK
- CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm .
- PLATING : GOLD PLATING OVER NICKEL.
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO +85°C.
- OPERATION: -40°C TO +85°C.
- WAVE SOLDERING TEMPERATURE: 230~250° 5~10 SECONDS.
- RoHS COMPLIANT.

MATES WITH MODULAR PLUG CONFORMING TO

FCC PART 68, SUBPART F.

RoHS PART NUMBER: E560X-XXX0XX-L

- 4- 4 CONTACTS
8- 8 CONTACTS
1-10 CONTACTS
- 1- 3u" 2- 6u" F-Gold Flash
3-15u" 4-30u" 5-50u" 6-Pd 20u"
- 8-FLAT PIN t=0.35mm(FRE TYPE)
R-FLAT PIN t=0.35mm(MAXTOP TYPE)

- 0- TIN W/FRE LOGO
2- TIN W/O FRE LOGO
3- NICKEL W/O FRE LOGO
4- NICKEL W/FRE LOGO

Type of Shield:

- E-FRONT PEG 3.05
F-FRONT PEG 3.05W/ 3 GROUNDING TABS
G-FRONT PEG 3.05W/ 5 GROUNDING TABS

- NO OF PORT: E-6 PORTS
G-8 PORTS
D-5 PORTS



PORTS	DIM"A"±0.10 0.20	DIM"B"±0.20	DIM"C"±0.15
6	87.12	69.85	81.28
8	115.06	97.79	109.22
5	73.15	55.88	67.31

MM (INCH)		DFTO QSJ	DATE 7/1/05"
TOLERANCES EXCEPT AS NOTED		CHKD YUKI	DATE 2006/7/11
MM		MFO	DATE
.0 ± 0.2		APPV-LUSHENG	DATE 2006/7/11
.00 ± 0.15		MATERIAL :	
.000 ± 0.075		QT'Y :	
ANGLES ± 0.5		FINISH :	
THIRD ANGLE PROJECTION		SCALE : 4:5	



RoHS Compliant

FULL RISE ELECTRONIC CO., LTD

TITLE

11.5 SIDE ENTRY PCB GANG JACK 10P

DRAWING NO. GE563060-LC

/PART NO. SEE NOTE

SIZE

A3

REV

1

DO NOT SCALE DRAWING

SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse:

[E5608-4EC062-L](#)