
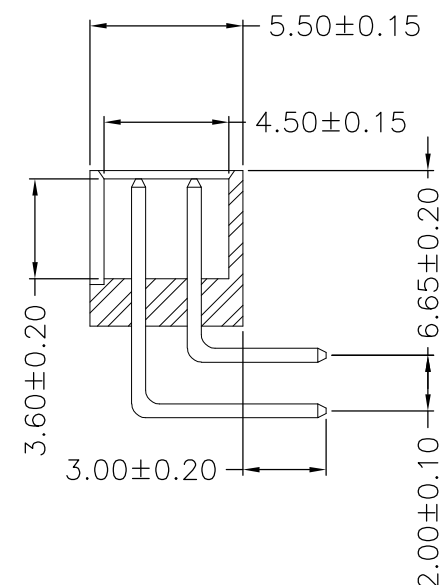


P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	RELEASED AS PER ECR-09-017658	06AUG09	SRE	PCH
	B1	ECR-10-026537	21JAN11	KK	HMR

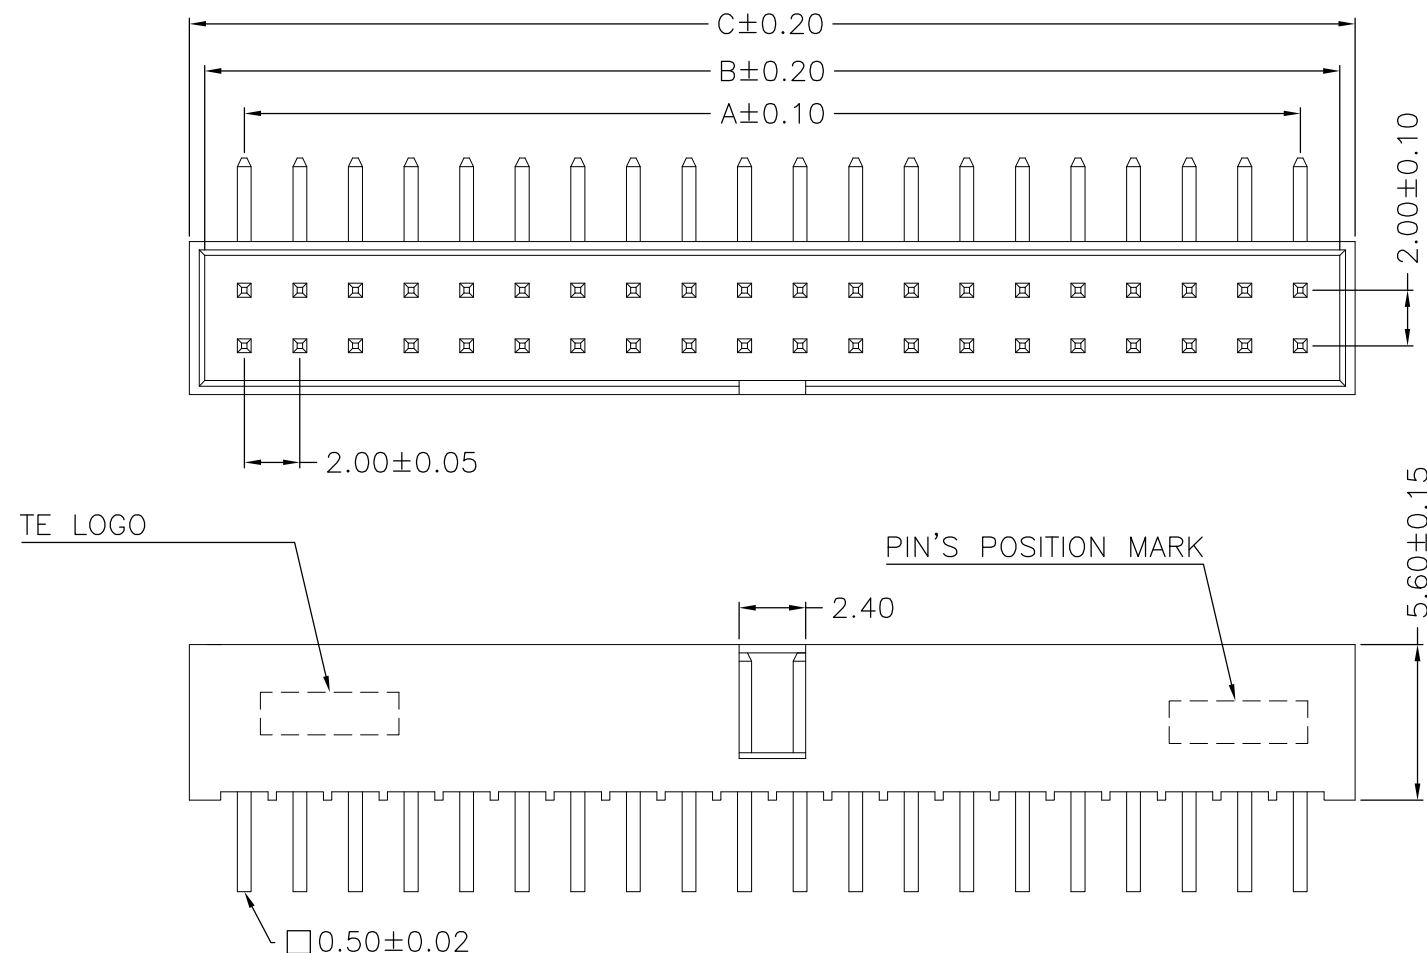

OBSOLETE ↑ OBSOLETE	64	62.00	64.85	65.95	6-1734493-4
	62	60.00	62.85	63.95	6-1734493-2
	60	58.00	60.85	61.95	6-1734493-0
	58	56.00	58.85	59.95	5-1734493-8
	56	54.00	56.85	57.95	5-1734493-6
	54	52.00	54.85	55.95	5-1734493-4
	52	50.00	52.85	53.95	5-1734493-2
	50	48.00	50.85	51.95	5-1734493-0
	48	46.00	48.85	49.95	4-1734493-8
	46	44.00	46.85	47.95	4-1734493-6
OBSOLETE	44	42.00	44.85	45.95	4-1734493-4
	42	40.00	42.85	43.95	4-1734493-2
	40	38.00	40.85	41.95	4-1734493-0
	38	36.00	38.85	39.95	3-1734493-8
	36	34.00	36.85	37.95	3-1734493-6
OBSOLETE	34	32.00	34.85	35.95	3-1734493-4
	32	30.00	32.85	33.95	3-1734493-2
	30	28.00	30.85	31.95	3-1734493-0
	28	26.00	28.85	29.95	2-1734493-8
OBSOLETE	26	24.00	26.85	27.95	2-1734493-6
	24	22.00	24.85	25.95	2-1734493-4
	22	20.00	22.85	23.95	2-1734493-2
	20	18.00	20.85	21.95	2-1734493-0
OBSOLETE	18	16.00	18.85	19.95	1-1734493-8
	16	14.00	16.85	17.95	1-1734493-6
	14	12.00	14.85	15.95	1-1734493-4
	12	10.00	12.85	13.95	1-1734493-2
OBSOLETE	10	8.00	10.85	11.95	1-1734493-0
	8	6.00	8.85	9.95	0-1734493-8
	6	4.00	6.85	7.95	0-1734493-6
	4	2.00	4.85	5.95	0-1734493-4
TION B	POS.	A	B	C	PART NUMBER
	DIMENSIONS				

NOTE:

1

MATERIAL :

HOUSING : NYLON 6T, UL94V-0, BLACK COLOUR.

CONTACT : BRASS, THICKNESS=0.5mm

2

FINISH:

CONTACT: 10μ" MIN. GOLD PLATED ON CONTACT AREA,
100μ" MIN. MATTE TIN PLATED ON SOLDER TAILS,
50μ" MIN. NICKEL UNDERPLATED OVERALL


3. WAVE SOLDER CAPABLE TO 265°C PER TE SPEC 109-202, CONDITION B

4. QUALIFICATION TEST REPORT: 501-57197

Technical drawing of a plate with 10 holes (2 rows of 5). Dimensions: DIM A (total width), 2.00 TYP (pitch), 2.00 TYP (edge distance), and Ø0.80 (hole diameter).

RECOMMENDED PCB LAYOUT (THICKNESS: 1.6mm)

(TOP VIEW) (TOLERANCE: ± 0.05)

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN O.HU 28-MAR-2006		TE Connectivity									
		CHK S.HOU 28-MAR-2006											
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± 0.20 2 PLC ± 0.15 3 PLC ± 0.10 4 PLC ± - ANGLES ± -		NAME AMPMODU 2.0mm PITCH, RIGHT ANGLE,DUAL ROW, THRU-HOLE									
													
								APVD W.J.KE 28-MAR-2006					
								PRODUCT SPEC 108-57197					
		APPLICATION SPEC —		SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO					
MATERIAL 		FINISH 		WEIGHT —		A3		—	C-1734493	—			
CUSTOMER DRAWING								SCALE	1:1	SHEET	1 OF 2	REV	B1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-1734493-4](#)