


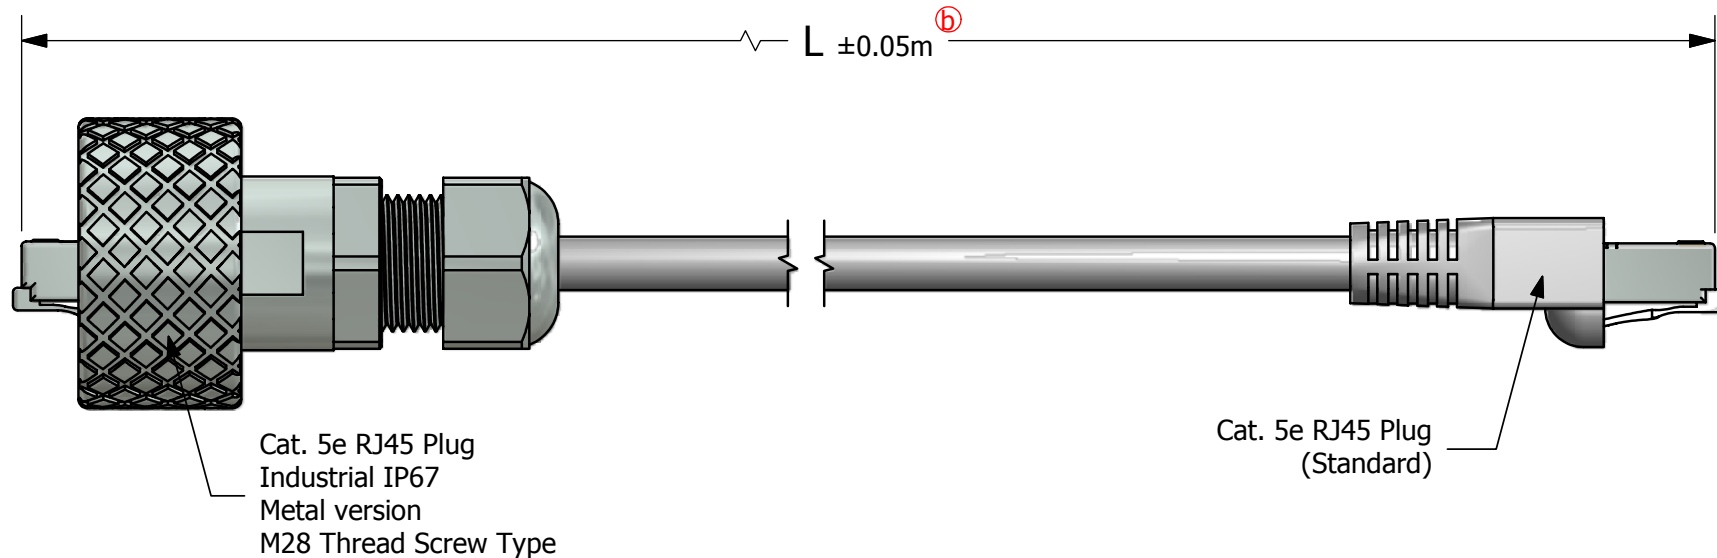

Notes:

1. Electrical:
 - Meets EIA/TIA-568-B.2 Cat.5e Specification
 - Connector Operating Temperature: -40° C to +85° C
2. Materials and Finish:
 - Metal Coupling Ring: Brass, Nickel Plated
 - Plug Housing: Metallized ABS, UL94 V-0, Nickel Plated
 - Interfacial Seal: Silicone, Color: White
 - Cable Gland: Brass, Nickel Plated
 - Cable Gland Seal: NBR, Color: Black
 - Cat.5e RJ45 Plug Metal Shell: Copper Alloy, Nickel Plated
 - Ⓢ - Cat.5e RJ45 Plug Plastic Housing: Clear Polycarbonate UL94 V-2
 - Cat.5e RJ45 Plug Contacts: Phosphor Bronze, Finish: 50 u" Gold min. over Nickel
 - RJ45 Modular Boot: PVC, Color: Black
 - Cable: See Part Number Table
3. RoHS compliant

Cable Length L	Part Number		
	Cat. 5e STP 4 Pair, AWG24 Solid Black Cable	Cat. 5e Outdoor UTP 4 Pair, AWG24 Solid Black Cable	Cat. 5e Outdoor STP 4 Pair, AWG24 Solid Black Cable
2 m	17-100964	17-101024	17-101054
4 m	17-100974	17-101034	17-101064
5 m	17-100984	17-101044	17-101074

Notes: - Special cable length are available please contact factory
 - UPT: Unshielded Twisted Pair
 - STP: Shielded Twisted Pair

Directive 2002/95/EC RoHS Compliant

THIS DRAWING MAY NOT BE COPIED, REPRODUCED, OR REPRODUCED IN ANY WAY AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC CORPORATION.	Customer:			Tolerance Unless otherwise specified			Scale: 1.8:1	Dim. in Meter
	Name	Title	Approval Date	Dimensional: Angles			Material: See Notes	
				2008	Date	Name	Title:	
				Draw.	Dec. 12	Vincent Ke	RJ45 Cat. 5e Ethernet Patch Cord	
				Appd.	Dec. 12	J. Chaudry	Industrial to Standard	
						Full Metal Version (RoHS Compliant)		
	c	Aug/08/2011	Vincent Ke	D-old		Drawing No.: 17K1A112		DIN A3
	b	Jan/29/2009	Vincent Ke			Part No.: SEE P/N ABOVE		Sheet 1/1
	a	original						
	Rev.	Changes	Date	Name				

CONEC

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[CONEC:](#)

[17-100964](#) [17-100974](#) [17-100984](#) [17-101024](#) [17-101034](#) [17-101044](#) [17-101054](#) [17-101064](#) [17-101074](#)