

4

3

2




1

THIS DRAWING IS UNPUBLISHED.



RELEASED FOR PUBLICATION

© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
G	14		S	REV PER 0G3A-0256-04	13APR04	JR	TM



STAMPING DETAIL

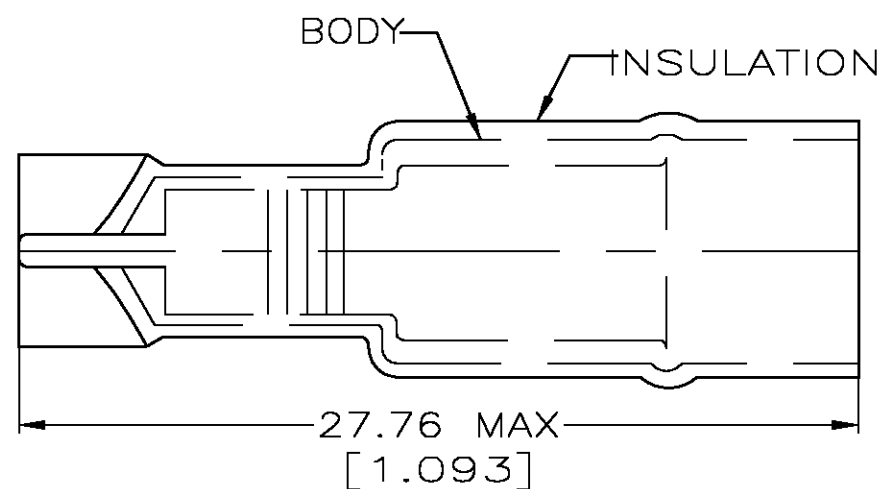

- 1 FOR 6.48 [.255] MAX WIRE INSULATION DIA
- 2 SUPERSEDED BY 50920
- 3 MATERIAL: BODY; CARBON STEEL
INSULATION; PVC
COLOR; NATURAL
- 4 FINISH: BODY; TIN PLATE PER ASTM B-545

AMP WIRE RANGE	Listed	LR7189 Certified
22-16 AWG SOLID OR STRANDED	22-16 AWG SOLID OR STRANDED	22-16 AWG SOLID OR STRANDED

10,000	BOX	2 50920-2
-	LOOSE PIECE	50920
QTY	DESCRIPTION	PART NO


AMP INCORPORATED
CUSTOMER SERVICE SYSTEMSFOR ADDITIONAL
PRODUCT INFORMATION OR
COPIES OF DRAWINGS
AND TECHNICAL DOCUMENTSPRODUCT INFORMATION CENTER
1-800-522-6752FOR APPLICATION
TOOLING INFORMATIONTOOLING ASSISTANCE CENTER
1-800-722-1111

FOR ORDER ENTRY


1-800-526-5142

THIS DRAWING IS A CONTROLLED DOCUMENT FOR
AMP INCORPORATED. IT IS SUBJECT TO CHANGE
AND THE CONTROLLING ENGINEERING ORGANIZATION
SHOULD BE CONTACTED FOR THE LATEST REVISION.MAX RECOMMENDED OPERATING
TEMPERATURE:
105°C MAXVOLTAGE RATING:
600V MAX (BUILDING WIRING)
1000V MAX (FIXTURES & SIGNS)CIRCULAR MIL AREA:
1.65-2.47mm² [3248-4872]
SOLID OR STRANDED

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

MATERIAL

TOLERANCES UNLESS
OTHERWISE SPECIFIED:0 PLC ± -
1 PLC ± -
2 PLC ± 0.20 [.008]
3 PLC ± -
4 PLC ± -
ANGLES ± -
FINISHDWN
S. GOULDEN 1/93
CHK
R HERSEY 1/93
APVD
M ELLIS 1/93
PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

tyco
ElectronicsTyco Electronics Corporation
Harrisburg, Pa 17105-3608NAME
SPLICE, WIRE, CLOSED ENDSIZE
A3
CAGE CODE
00779
DRAWING NO
C-50920
RESTRICTED TOSCALE
4:1
SHEET
1 OF 1
REV
S

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[50920](#)