


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	H	REVISED PER ECO-14-000068	28APR2014	NK	MM

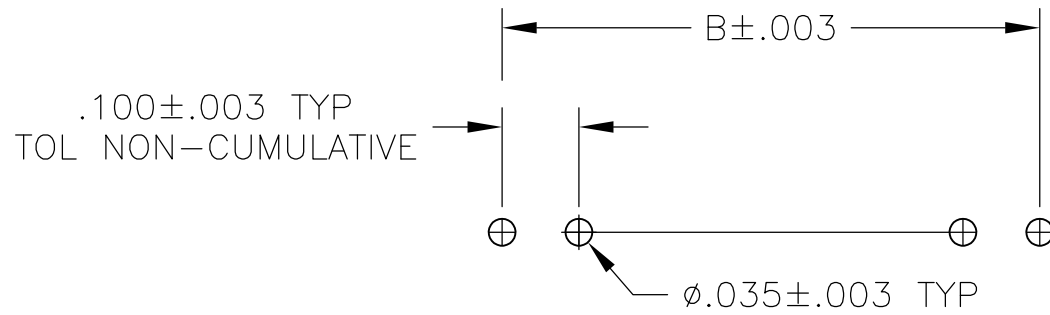

- 1 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 2 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS.
- 3 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- 4 .000030 GOLD IN CONTACT AREA, .000100--.000200 MATTE TIN--LEAD ON SOLDER TAIL, ALL OVER .000050 NICKEL
- 5 BREAKAWAY NOTCH ANGLE CAN BE ORIENTED TO THE RIGHT (AS SHOWN) OR TO THE LEFT
- 6 .000030 GOLD IN CONTACT AREA, .000100--.000200 MATTE TIN ON SOLDER TAIL, ALL OVER .000050 NICKEL
- 7 HIGH TEMPERATURE CONFIGURATION
- 8 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

OBSOLETE
 OBSOLETE
 OBSOLETE
 BY 6-103765-4
 OBSOLETE
 BY 6-103765-1
 OBSOLETE
 OBSOLETE
 OBSOLETE

DWG. D. RINGLEY 24JUL85 CHK. R. ELICKER APP'D. R. ELICKER 24JUL85		 TE Connectivity			
NAME ASSEMBLY, MOD II, HEADER, BREAKAWAY, SINGLE ROW, RIGHT ANGLE 100, , WITH .025 SQUARE POSTS					
PRODUCT SPEC					
APPLICATION SPEC		SIZE CAGE CODE DRAWING NO		RESTRICTED TO	
WEIGHT —		A1 00779 C-103765		—	
CUSTOMER DRAWING		SCALE 4:1		SHEET 1 of 1 REV H	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[9-103765-0](#)