


THIS DRAWING IS UNPUBLISHED.


RELEASED FOR PUBLICATION

© COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
	G	0G3B-0317-03	24APR03	TK	GS	



ACCOMODATES
1.57 DIA PIN
[.062]

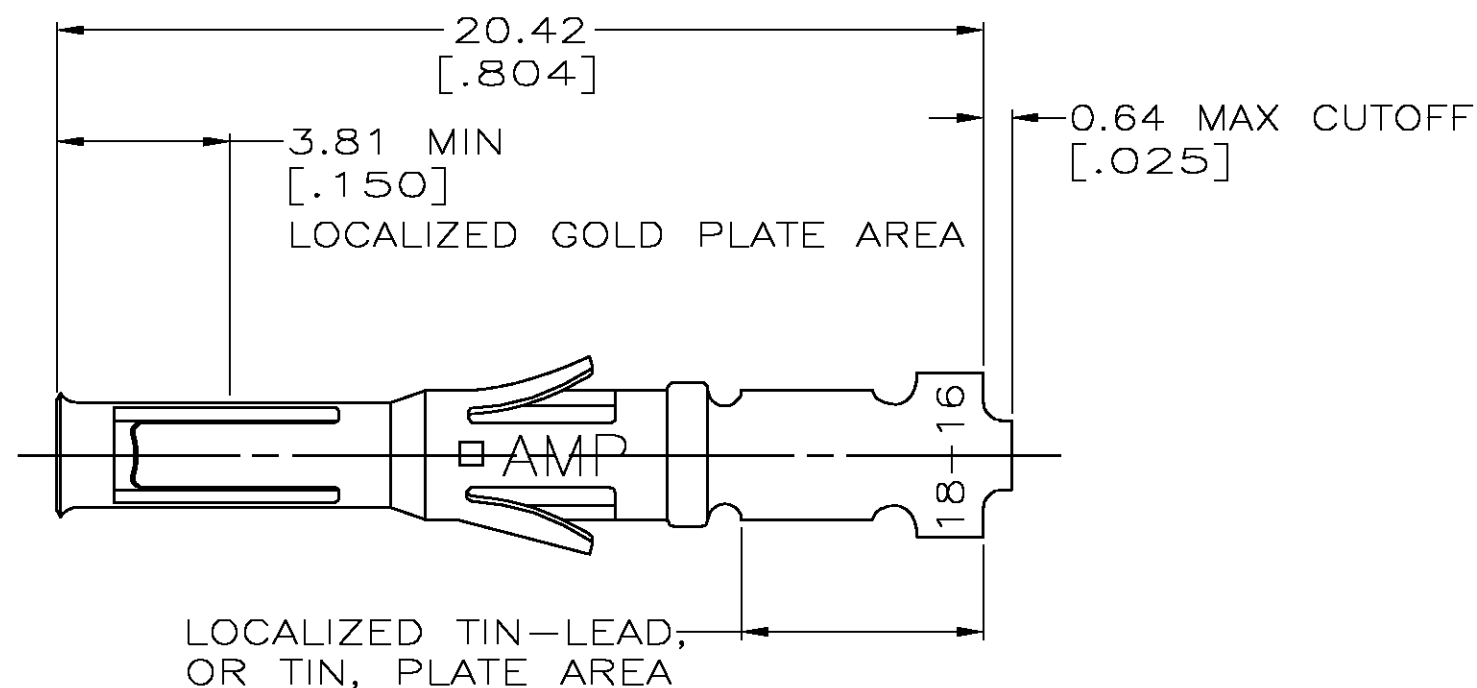

LOCALIZED TIN-LEAD,
OR TIN, PLATE AREA

1. WIRE RANGE 18-16 AWG.
2. INSULATION RANGE 2.03-2.54[.080-.100] DIA.
3. 0.76 μ m [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA,
1.27 μ m [.000050] MIN TIN-LEAD IN LOCALIZED TIN-LEAD PLATE AREA,
BOTH OVER 1.27 μ m [.000050] MIN NICKEL.
4. TIN PLATED.
5. GOLD PLATING PER MIL-G-45204, TIN PER MIL-T-10727
AND NICKEL PER QQ-N-290.
6. 0.76 μ m [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA,
1.27 μ m [.000050] MIN TIN IN LOCALIZED TIN PLATE AREA,
BOTH OVER 1.27 μ m [.000050] MIN NICKEL.

66580-7	6	66590-4
66580-4	3	66590-2
66580-2	4	66590-1
STRIP REF	FINISH	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D.HARDY 06/15/94	tyco Tyco Electronics Corporation			
DIMENSIONS: INCHES		CHK R.STONE 06/22/94	Electronics Harrisburg, Pa			
	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.13 [.005] 3 PLC ± - 4 PLC ± - ANGLES ± -	APVD G.STEINHAUER 06/27/94	NAME CONTACT, SOCKET, LOOSE PIECE, TYPE VI, MULTIMATE			
		PRODUCT SPEC —				
MATERIAL BRS PER MIL—C—50	FINISH SEE TABLE	APPLICATION SPEC —	SIZE A3	CAGE CODE 00779	DRAWING NO C-66590	RESTRICTED TO —
		WEIGHT —				
CUSTOMER DRAWING			SCALE 6:1	SHEET 1	OF 1	REV G

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[66590-2](#) [66590-4](#)