



# wakefield-vette

| Standard<br>P/N | Height Above<br>PC Board<br>in. (mm) | Maximum<br>Footprint<br>in. (mm) | Thermal Performance at Typical Load |                   |
|-----------------|--------------------------------------|----------------------------------|-------------------------------------|-------------------|
|                 |                                      |                                  | Natural Convection                  | Forced Convection |
| 218-40CTE3      | .40 (10.2)                           | .90 (22.9) x .315 (8.0)          | 62°C rise @ 2W                      | 21°C/W @ 200LFM   |
| 218-40CTE5      | .40 (10.2)                           | 1.03 (26.2) x .50 (12.7)         | 62°C rise @ 2W                      | 21°C/W @ 200LFM   |

## MECHANICAL DIMENSIONS

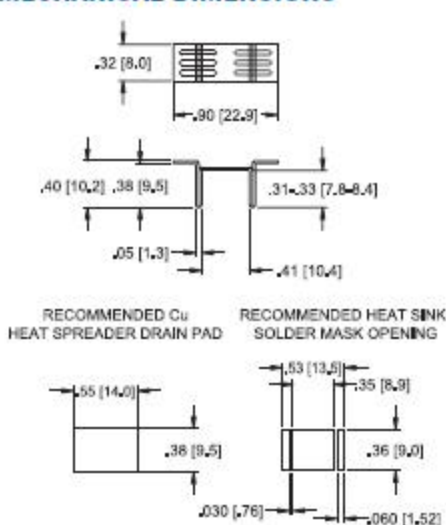


218-40CT3

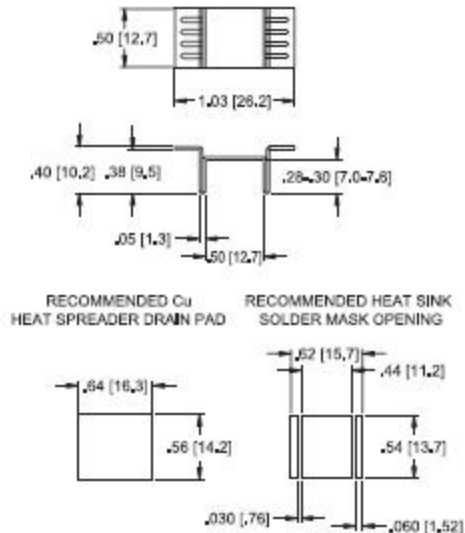

218-40CT5

## NATURAL AND FORCED CONVECTION CHARACTERISTICS

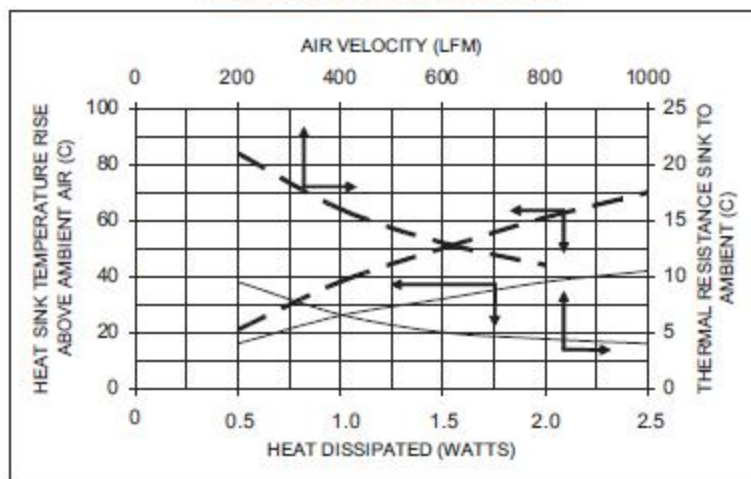

Solid line = 218-40CT5 Dashed Line = 218-40CT3

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Wakefield-Vette:](#)

[218-40CTE5](#) [218-40CTE3](#)