


UNCONTROLLED DOCUMENT

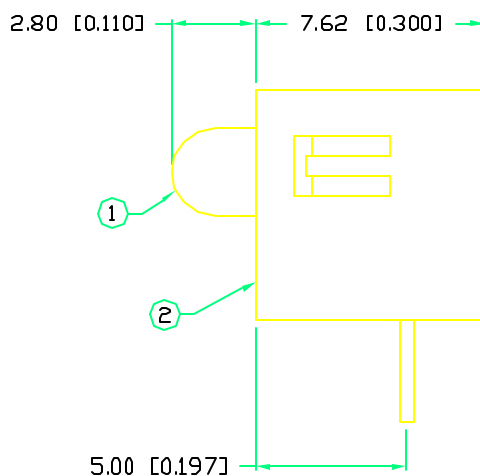

1. SSL-LX3044SRD LED, SUPER RED.
2. SSH-LXH304 HOLDER, BLACK.

ELECTRO—OPTICAL CHARACTERISTICS $T_A=25^{\circ}\text{C}$			$I_f=20\text{mA}$	
PARAMETER	MIN	TYP	MAX	UNITS TEST COND
PEAK WAVELENGTH		660 (RED)		nm
FORWARD VOLTAGE		1.7	2.3	V_f
REVERSE VOLTAGE	4.0			V_r
AXIAL INTENSITY		80		mcd $I_f=100\mu\text{A}$
VIEWING ANGLE		60		$2\times$ theta $I_f=20\text{mA}$
EMITTED COLOR:	RED			
EPOXY LENS FINISH:	RED DIFFUSED			

UNCONTROLLED DOCUMENT

DRAWN BY:	CHECKED BY:	APPROVED BY:	DATE: 11-25-91
jc/ck/pu			PAGE: 1 OF 1
			SCALE: N/A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

[SSF-LXH304SRD](#)