

## Single Phase Silicon Bridge Rectifier

$V_{RRM} = 600\text{ V} - 1000\text{ V}$   
 $I_O = 15\text{ A}$


### Features

- High efficiency
- Silicon junction
- Metal case
- Types from 600 V to 1000 V  $V_{RRM}$
- Not ESD Sensitive

### Mechanical Data

Case: Mounted in the bridge encapsulation  
 Mounting position: Hole for #10 screw  
 Polarity: Marked on case

KBPC-T/W Package



**Maximum ratings at  $T_c = 25\text{ }^\circ\text{C}$ , unless otherwise specified (KBPCXXXXT uses KBPC-T package while KBPCXXXXW uses KBPC-W package)**

| Parameter                       | Symbol    | Conditions | KBPC1506T/W | KBPC1508T/W | KBPC1510T/W | Unit             |
|---------------------------------|-----------|------------|-------------|-------------|-------------|------------------|
| Repetitive peak reverse voltage | $V_{RRM}$ |            | 600         | 800         | 1000        | V                |
| RMS reverse voltage             | $V_{RMS}$ |            | 420         | 560         | 700         | V                |
| DC blocking voltage             | $V_{DC}$  |            | 600         | 800         | 1000        | V                |
| Operating temperature           | $T_j$     |            | -55 to 150  | -55 to 150  | -55 to 150  | $^\circ\text{C}$ |
| Storage temperature             | $T_{stg}$ |            | -55 to 150  | -55 to 150  | -55 to 150  | $^\circ\text{C}$ |

### Electrical characteristics at $T_c = 25\text{ }^\circ\text{C}$ , unless otherwise specified

Single phase, half sine wave, 60 Hz, resistive or inductive load  
 For capacitive load derate current by 20%






| Parameter   | Symbol    | Conditions  | KBPC1506T/W | KBPC1508T/W | KBPC1510T/W | Unit          |
|---|-----------|---|-------------|-------------|-------------|---------------|
| Maximum average forward rectified current                       | $I_O$     | $T_c = 55\text{ }^\circ\text{C}$                                      | 15          | 15          | 15          | A             |
| Peak forward surge current                                      | $I_{FSM}$ | 8.3 ms half sine-wave   | 300         | 300         | 300         | A             |
| Maximum instantaneous forward voltage per leg                   | $V_F$     | $I_F = 7.5\text{ A}$  | 1.1         | 1.1         | 1.1         | V             |
| Maximum DC reverse current at rated DC blocking voltage per leg | $I_R$     | $T_c = 25\text{ }^\circ\text{C}$<br>$T_c = 100\text{ }^\circ\text{C}$ | 5<br>500    | 5<br>500    | 5<br>500    | $\mu\text{A}$ |
| Typical junction capacitance <sup>1</sup>                       | $C_j$     |   | 300         | 300         | 300         | pF            |

### Thermal characteristics

|   |                 |  |     |     |     |                    |
|---|-----------------|--|-----|-----|-----|--------------------|
| Typical thermal resistance <sup>2</sup> | $R_{\theta JC}$ |  | 2.3 | 2.3 | 2.3 | $^\circ\text{C/W}$ |
|---|-----------------|--|-----|-----|-----|--------------------|


<sup>1</sup> - Measured at 1 MHz and applied reverse voltage of 4.0 V D.C.

<sup>2</sup> - Device mounted on 300 mm x 300 mm x 1.6 mm Cu plate heatsink

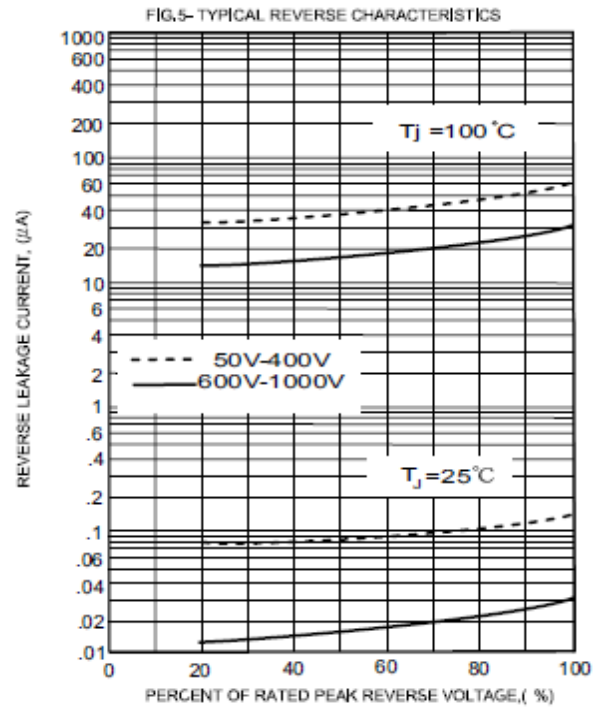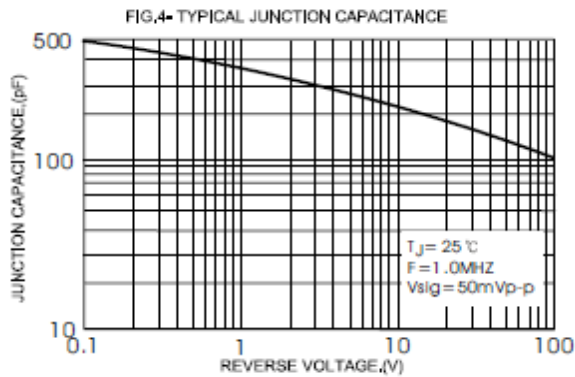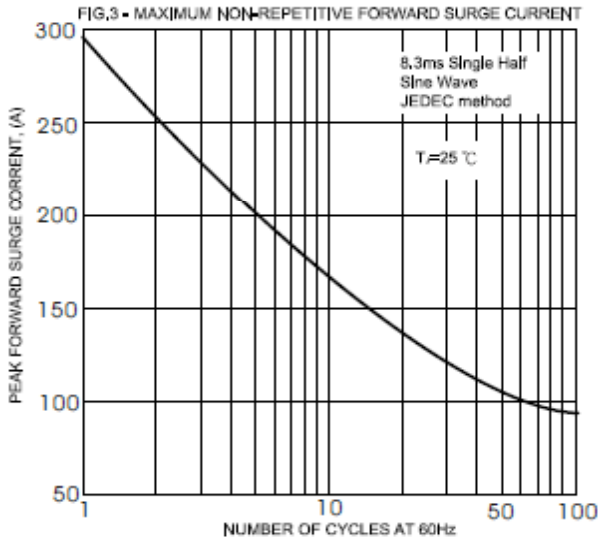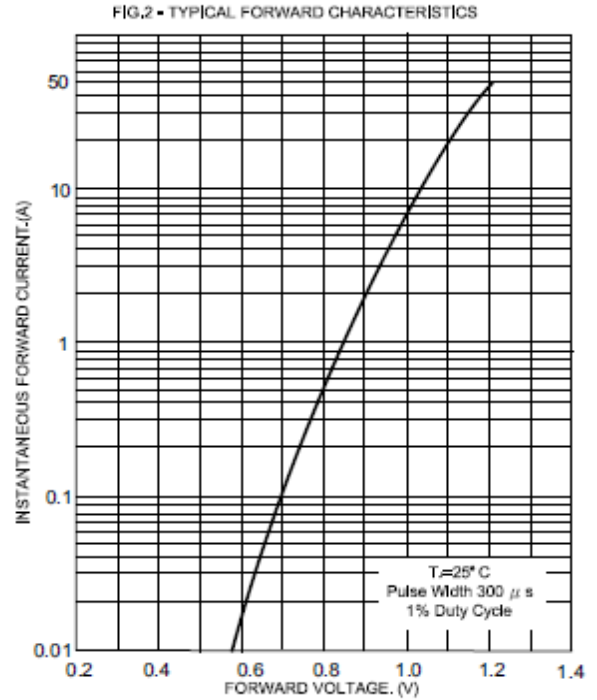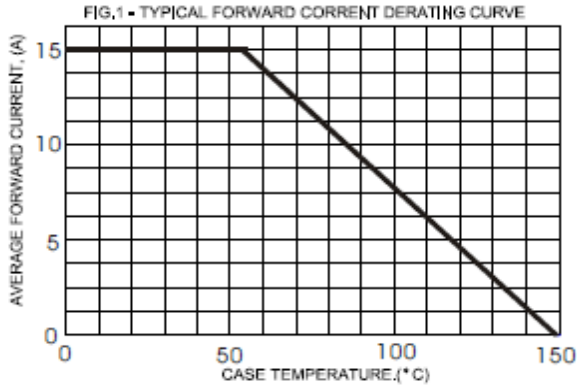


## Package dimensions and terminal configuration

Product is marked with part number and terminal configuration.

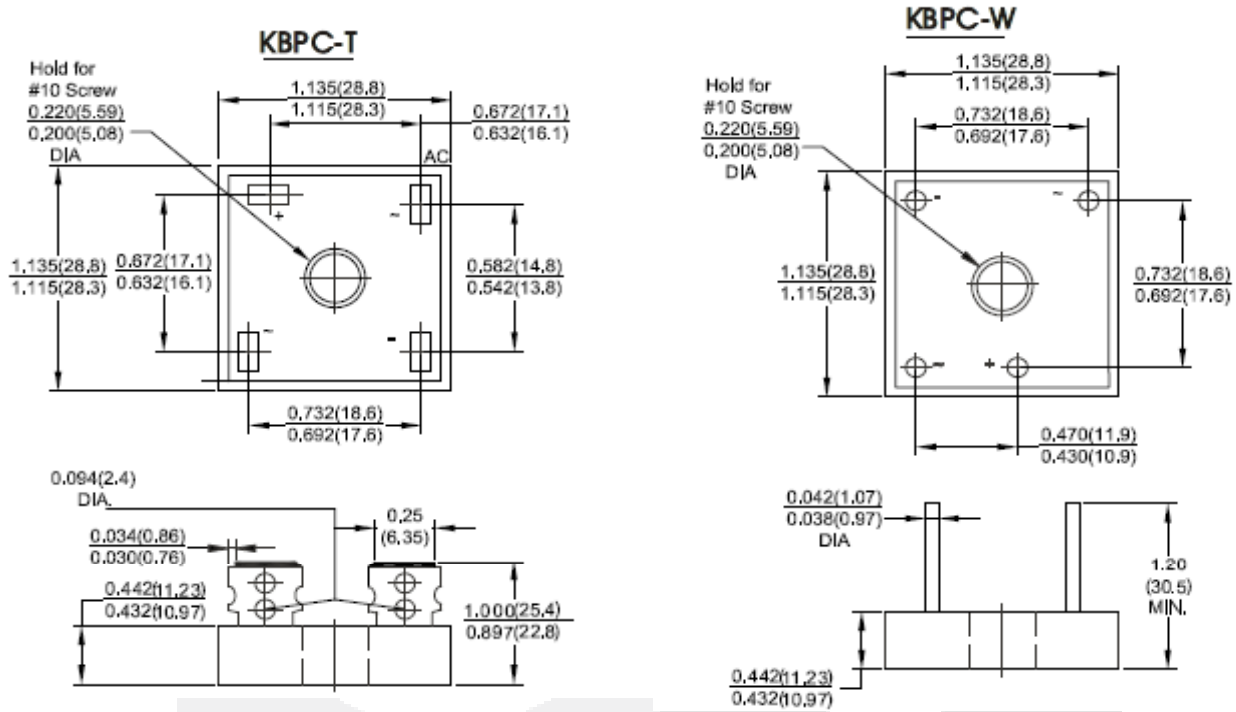

Dimensions in inches and (millimeters)



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[GeneSiC Semiconductor:](#)

[KBPC15010T](#) [KBPC15010W](#) [KBPC1506W](#) [KBPC1506T](#) [KBPC1508T](#) [KBPC1508W](#) [KBPC1510W](#) [KBPC1510T](#)