NOTES:

I. MATERIALS AND FINISHES:


BODY, & RING = BRASS, NICKEL PLATED
CONTACT PIN = BERYLLIUM COPPER, GOLD PLATED (TINNED)
INSULATOR = PTFE

SOLDER = Sn60 OR Sn63


2. ELECTRICAL:


FREQUENCY RANGE = DC-12.4 GHz VSWR = 1.400 MAX. INSERTION LOSS = 0.25 dB MAX. = 1,000 VAC MIN. I.R. = 5,000 MEGOHMS MIN.





SCALE 2.000

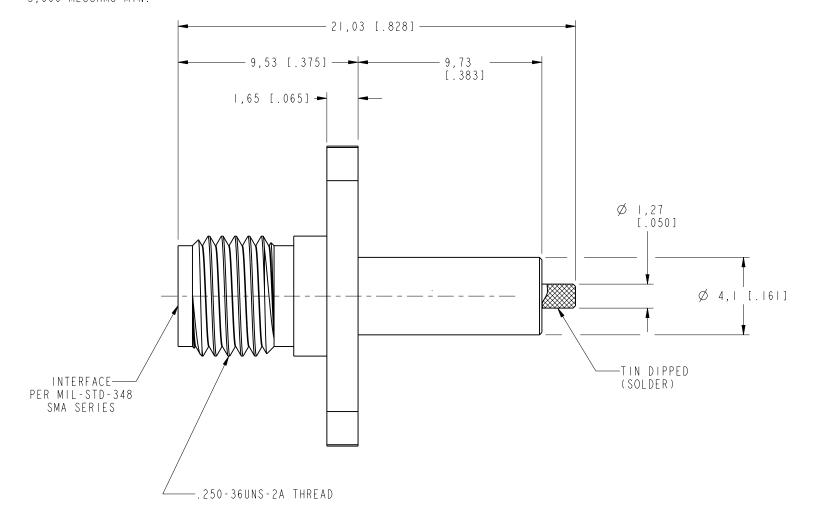

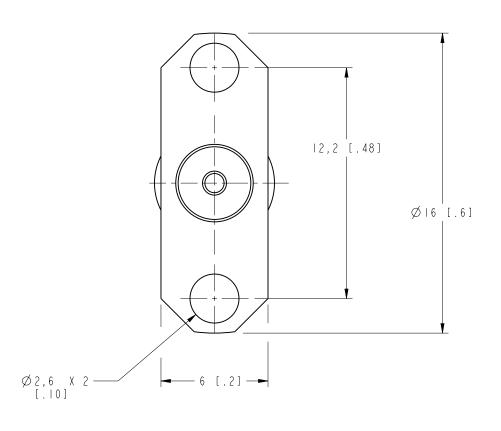

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 0.5 - 6mm 6 - 30mm 30 - 120mm ±0.2mm ±0.4mm ± 0.6mm	MATERIAL	DRAWN C. McGRATH	DATE 3/1/02	SMA PANEL	Amphenol Corporation	
NOTICE - These drawings, specifications, or other data (I) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they	REFERENCE	ENGINEER B. GLEISSNER	DATE 3/1/02	RECEPTACLE	Communication and Netw Products Division	
are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is	EAR 508 GEN# 901-9887-RFX_ASSY	APPROVED O. BARTHELMES	DATE 6/21/02	- JACK	Danbury, CT U.S.A. 06810 SCALE: 5.0:1 SHEET 2 OF 2	
not to be regarded by implication or otherwise in any manner licensing, granting rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to	permitting such holder or any other person to manufacture, use or sell any 615X-1778-100		CAD FILE		CODE ID DWG SIZEDRAWING NO. REV	
or disclosed by said drawinas, specifications, or other data.		1:\SMA\901-10065		74868 B	901-10065 A	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

<u>Amphenol</u>: 901-10065