
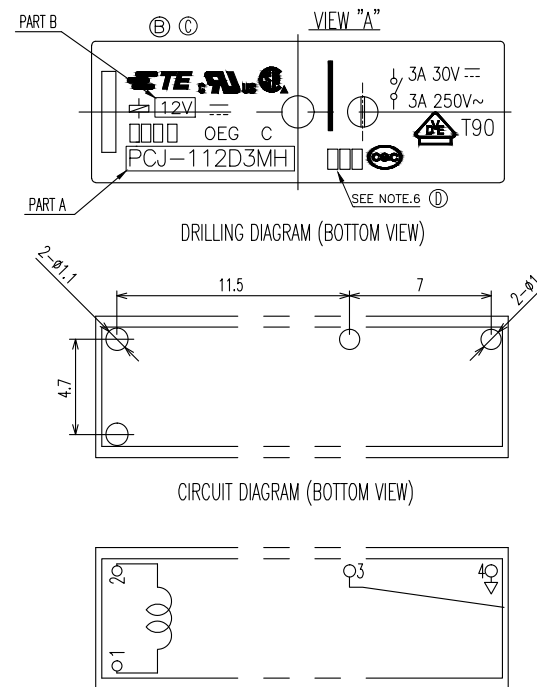


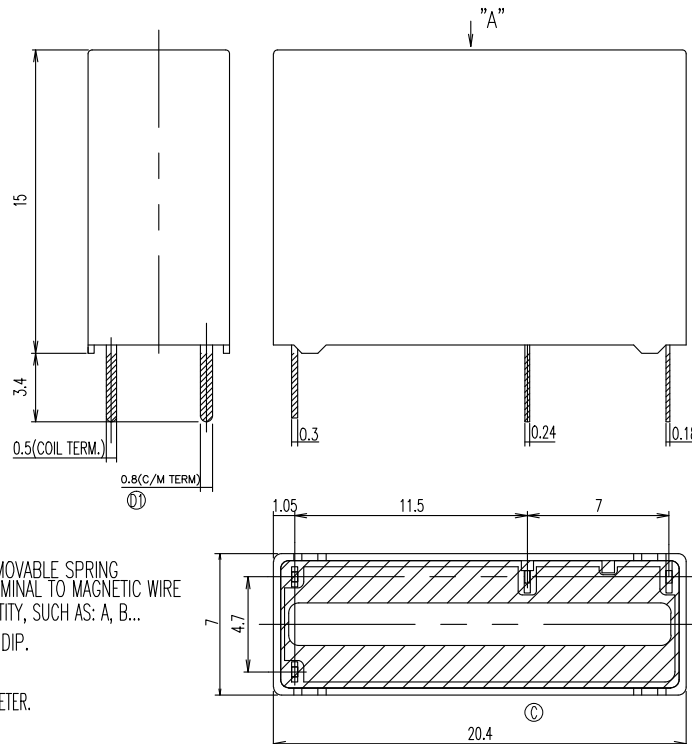

NOTES:

1. SOLDER DIP: STATIONARY TERMINAL AND MOVABLE SPRING COIL TERMINAL AND COIL TERMINAL TO MAGNETIC WIRE
2. ONE CHARACTER DISTINGUISH THE LINE IDENTITY, SUCH AS: A, B...
3. TERMINAL DIMENSION IS BEFORE SOLDER DIP.
4. FOR THE TIN-PLATING OF THE PINS:
 +0.1mm FOR WIDTH, THICKNESS AND DIAMETER.
 +0.5mm FOR LENGTH.
5. MARKING FROM INK CHANGE TO LASER
6. ADD LOT NO. SYSTEM AS FOLLOWING;

I. DIGITS FOR DAY OF THE WEEK
 1...MONDAY IN THIS WEEK;
 2...TUESDAY IN THIS WEEK;

 7...SUNDAY IN THIS WEEK

II. DIGITS FOR SHIFT OF THE DAY
 1...DAY SHIFT IN THIS DAY;
 2...NIGHT SHIFT IN THIS DAY;

III. ONE CHARACTER DISTINGUISH THE LINE IDENTITY, SUCH AS: A, B, Z

DIAGRAM DIMENSION	TOLERANCE
0.99mm max.	±0.1mm
1 - 2.99mm	±0.2mm
3mm min.	±0.3mm


THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
0 PLC	±
1 PLC	±
2 PLC	±
3 PLC	±
4 PLC	±
5 PLC	±
6 PLC	±
7 PLC	±
8 PLC	±
9 PLC	±
10 PLC	±
11 PLC	±
12 PLC	±
13 PLC	±
14 PLC	±
15 PLC	±
16 PLC	±
17 PLC	±
18 PLC	±
19 PLC	±
20 PLC	±
21 PLC	±
22 PLC	±
23 PLC	±
24 PLC	±
25 PLC	±
26 PLC	±
27 PLC	±
28 PLC	±
29 PLC	±
30 PLC	±
31 PLC	±
32 PLC	±
33 PLC	±
34 PLC	±
35 PLC	±
36 PLC	±
37 PLC	±
38 PLC	±
39 PLC	±
40 PLC	±
41 PLC	±
42 PLC	±
43 PLC	±
44 PLC	±
45 PLC	±
46 PLC	±
47 PLC	±
48 PLC	±
49 PLC	±
50 PLC	±
51 PLC	±
52 PLC	±
53 PLC	±
54 PLC	±
55 PLC	±
56 PLC	±
57 PLC	±
58 PLC	±
59 PLC	±
60 PLC	±
61 PLC	±
62 PLC	±
63 PLC	±
64 PLC	±
65 PLC	±
66 PLC	±
67 PLC	±
68 PLC	±
69 PLC	±
70 PLC	±
71 PLC	±
72 PLC	±
73 PLC	±
74 PLC	±
75 PLC	±
76 PLC	±
77 PLC	±
78 PLC	±
79 PLC	±
80 PLC	±
81 PLC	±
82 PLC	±
83 PLC	±
84 PLC	±
85 PLC	±
86 PLC	±
87 PLC	±
88 PLC	±
89 PLC	±
90 PLC	±
91 PLC	±
92 PLC	±
93 PLC	±
94 PLC	±
95 PLC	±
96 PLC	±
97 PLC	±
98 PLC	±
99 PLC	±
100 PLC	±

DWN H. SASAKI
 CHK Y. OIKAWA
 APVD A. NAGAI
 PRODUCT SPEC
 APPLICATION SPEC
 WEIGHT
 CUSTOMER DRAWING

NAME			
PCJ SPEC ,301			
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C=1721081	-
SCALE	SHEET	REV	
5:1	1 of 3	D1	

Ⓑ CHANGE CASE,CORE,YOKE : REV_A ==> B

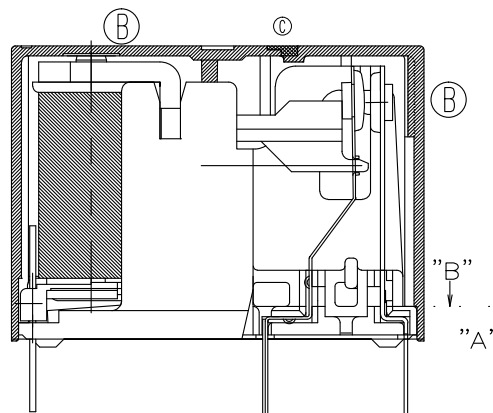

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN H.SASAKI		TE Connectivity	
DIMENSIONS: mm		CHK Y.OIKAWA			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD A.NAGAI		NAME	
0 PLC ±		PRODUCT SPEC		PCJ SPEC ,301	
1 PLC ±		APPLICATION SPEC		SIZE CAGE CODE DRAWING NO	
2 PLC ±		WEIGHT		A3 00779 C=1721081	
3 PLC ±		CUSTOMER DRAWING		RESTRICTED TO	
4 PLC ±				SCALE 5:1 SHEET 2 of 3 REV D1	
MATERIAL		FINISH			

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT — By TE Connectivity

ALL RIGHTS RESERVED.

LOC
HBDIST
—

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
—	—	SEE SHEET 1	—	—	—

①

N	PCJ-12403MH ,301S	2-1721081-8	107-79053 (TUBE)	24V	PCJ-12403MH
M	PCJ-11803MH ,301S	2-1721081-7	107-79053 (TUBE)	18V	PCJ-11803MH
L	PCJ-11203MH ,301S	2-1721081-6	107-79053 (TUBE)	12V	PCJ-11203MH
K	PCJ-10903MH ,301S	2-1721081-5	107-79053 (TUBE)	9V	PCJ-10903MH
J	PCJ-10603MH ,301S	2-1721081-4	107-79053 (TUBE)	6V	PCJ-10603MH
I	PCJ-10503MH ,301S	2-1721081-3	107-79053 (TUBE)	5V	PCJ-10503MH
H	PCJ-10303MH ,301S	2-1721081-2	107-79053 (TUBE)	3V	PCJ-10303MH
G	PCJ-12403M ,301S	2-1721081-1	107-79053 (TUBE)	24V	PCJ-12403M
F	PCJ-11803M ,301S	2-1721081-0	107-79053 (TUBE)	18V	PCJ-11803M
E	PCJ-11203M ,301S	1-1721081-9	107-79053 (TUBE)	12V	PCJ-11203M
D	PCJ-10903M ,301S	1-1721081-8	107-79053 (TUBE)	9V	PCJ-10903M
C	PCJ-10603M ,301S	1-1721081-7	107-79053 (TUBE)	6V	PCJ-10603M
B	PCJ-10503M ,301S	1-1721081-6	107-79053 (TUBE)	5V	PCJ-10503M
A	PCJ-10303M ,301S	1-1721081-5	107-79053 (TUBE)	3V	PCJ-10303M
n	PCJ-12403MH ,301	1-1721081-4	107-79014 (TRAY)	24V	PCJ-12403MH
m	PCJ-11803MH ,301	1-1721081-3	107-79014 (TRAY)	18V	PCJ-11803MH
l	PCJ-11203MH ,301	1-1721081-2	107-79014 (TRAY)	12V	PCJ-11203MH
k	PCJ-10903MH ,301	1-1721081-1	107-79014 (TRAY)	9V	PCJ-10903MH
j	PCJ-10603MH ,301	1-1721081-0	107-79014 (TRAY)	6V	PCJ-10603MH
i	PCJ-10503MH ,301	1721081-9	107-79014 (TRAY)	5V	PCJ-10503MH
h	PCJ-10303MH ,301	1721081-8	107-79014 (TRAY)	3V	PCJ-10303MH
g	PCJ-12403M ,301	1721081-7	107-79014 (TRAY)	24V	PCJ-12403M
f	PCJ-11803M ,301	1721081-6	107-79014 (TRAY)	18V	PCJ-11803M
e	PCJ-11203M ,301	1721081-5	107-79014 (TRAY)	12V	PCJ-11203M
d	PCJ-10903M ,301	1721081-4	107-79014 (TRAY)	9V	PCJ-10903M
c	PCJ-10603M ,301	1721081-3	107-79014 (TRAY)	6V	PCJ-10603M
b	PCJ-10503M ,301	1721081-2	107-79014 (TRAY)	5V	PCJ-10503M
a	PCJ-10303M ,301	1721081-1	107-79014 (TRAY)	3V	PCJ-10303M
No	DESCRIPTION	TE PART NO	PACKING SPECIFICATION	PART B	PART A

RELAY TYPE

Ⓐ

nn	PCJ-12403MH ,301M	4-1721081-2	107-79048 (TUBE)	24V	PCJ-12403MH
mm	PCJ-11803MH ,301M	4-1721081-1	107-79048 (TUBE)	18V	PCJ-11803MH
ll	PCJ-11203MH ,301M	4-1721081-0	107-79048 (TUBE)	12V	PCJ-11203MH
kk	PCJ-10903MH ,301M	3-1721081-9	107-79048 (TUBE)	9V	PCJ-10903MH
jj	PCJ-10603MH ,301M	3-1721081-8	107-79048 (TUBE)	6V	PCJ-10603MH
ii	PCJ-10503MH ,301M	3-1721081-7	107-79048 (TUBE)	5V	PCJ-10503MH
hh	PCJ-10303MH ,301M	3-1721081-6	107-79048 (TUBE)	3V	PCJ-10303MH
gg	PCJ-12403M ,301M	3-1721081-5	107-79048 (TUBE)	24V	PCJ-12403M
ff	PCJ-11803M ,301M	3-1721081-4	107-79048 (TUBE)	18V	PCJ-11803M
ee	PCJ-11203M ,301M	3-1721081-3	107-79048 (TUBE)	12V	PCJ-11203M
dd	PCJ-10903M ,301M	3-1721081-2	107-79048 (TUBE)	9V	PCJ-10903M
cc	PCJ-10603M ,301M	3-1721081-1	107-79048 (TUBE)	6V	PCJ-10603M
bb	PCJ-10503M ,301M	3-1721081-0	107-79048 (TUBE)	5V	PCJ-10503M
aa	PCJ-10303M ,301M	2-1721081-9	107-79048 (TUBE)	3V	PCJ-10303M
No	DESCRIPTION	TE PART NO	PACKING SPECIFICATION	PART B	PART A

Ⓐ RELAY TYPE

		Sn-Ag-Cu	SOLDER	18
94V-0		PBT	CASE	17
		UV	SEAL(CASE) JUST FOR WASH TIGHT	16
		EPOXY	SEAL(CASE AND BASE)	15
		3JEW	MAGNETIC WIRE	14
94V-0		PBT	CARD	13
		Ag ALLOY	STATIONARY CONTACT	12
	SOLDER DIP	Cu ALLOY	STATIONARY TERMINAL	11
		Ag ALLOY	MOVABLE CONTACT	10
	SOLDER DIP	Cu ALLOY	MOVABLE SPRING	9
94V-0		PBT	BASE	8
		STAINLESS	HINGE SPRING	7
	NIP	STEEL	ARMATURE	6
	NIP	STEEL	CORE	5
	NIP	STEEL	YOKE	4
	SOLDER DIP	Cu ALLOY	COIL TERMINAL B	3
	SOLDER DIP	Cu ALLOY	COIL TERMINAL A	2
94V-0		PBT	BOBBIN	1
INCOMBUSTIBILITY	TREATMENT	MATERIAL	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN H.SASAKI		 TE Connectivity	
		CHK Y.OIKAWA			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC ±— 1 PLC ±— 2 PLC ±— 3 PLC ±— 4 PLC ±— ANGLES ±—		APVD A.NAGAI PRODUCT SPEC — APPLICATION SPEC — WEIGHT —	
MATERIAL —		FINISH —		SIZE A3	
CUSTOMER DRAWING				CAGE CODE 00779	
				DRAWING NO 1721081	
				RESTRICTED TO —	
				SCALE 5:1	
				SHEET 3 of 3	
				REV D1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-1721081-9](#)