

D

C

B





A

D


C

B

A

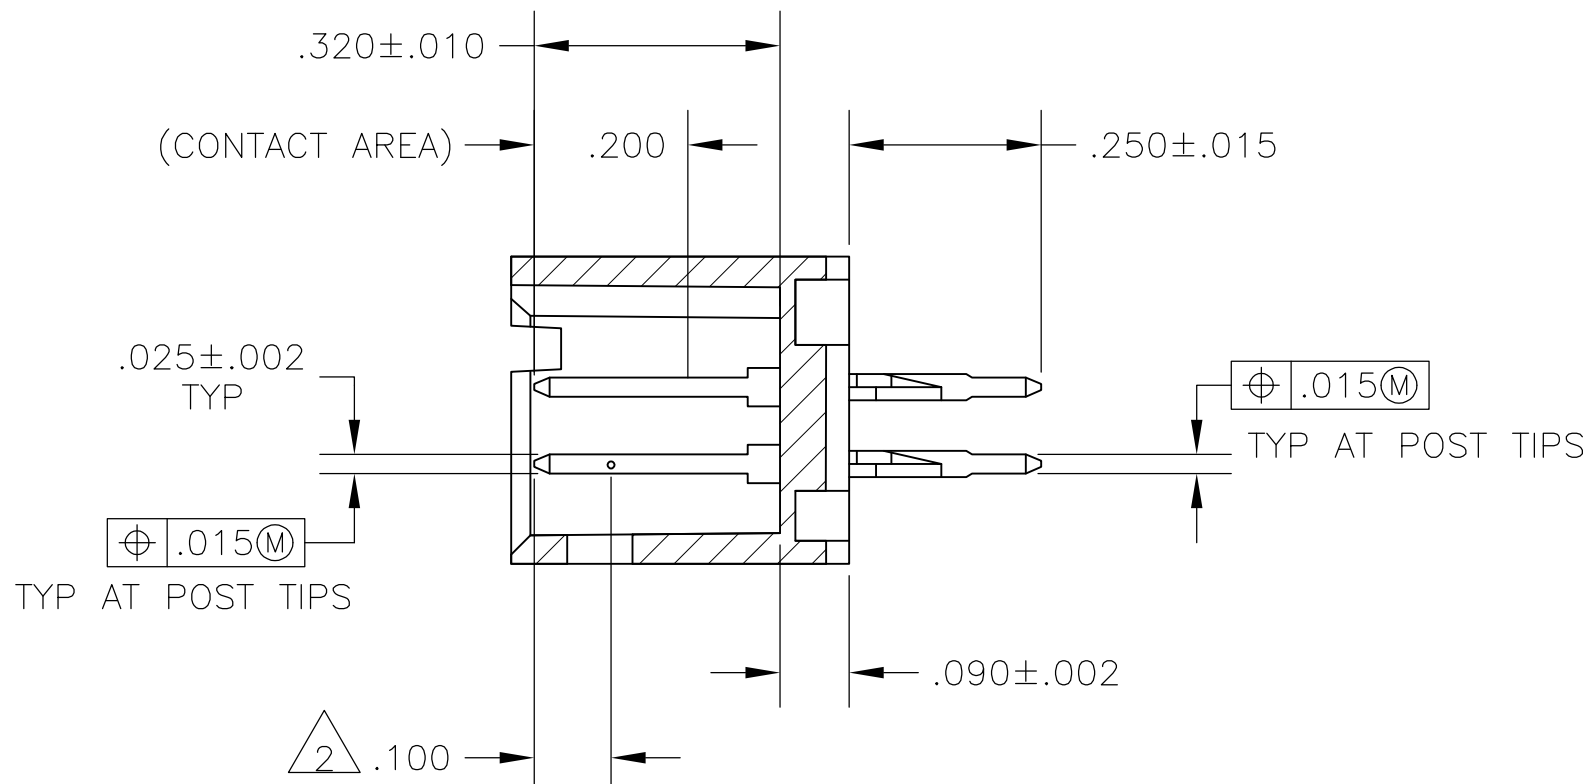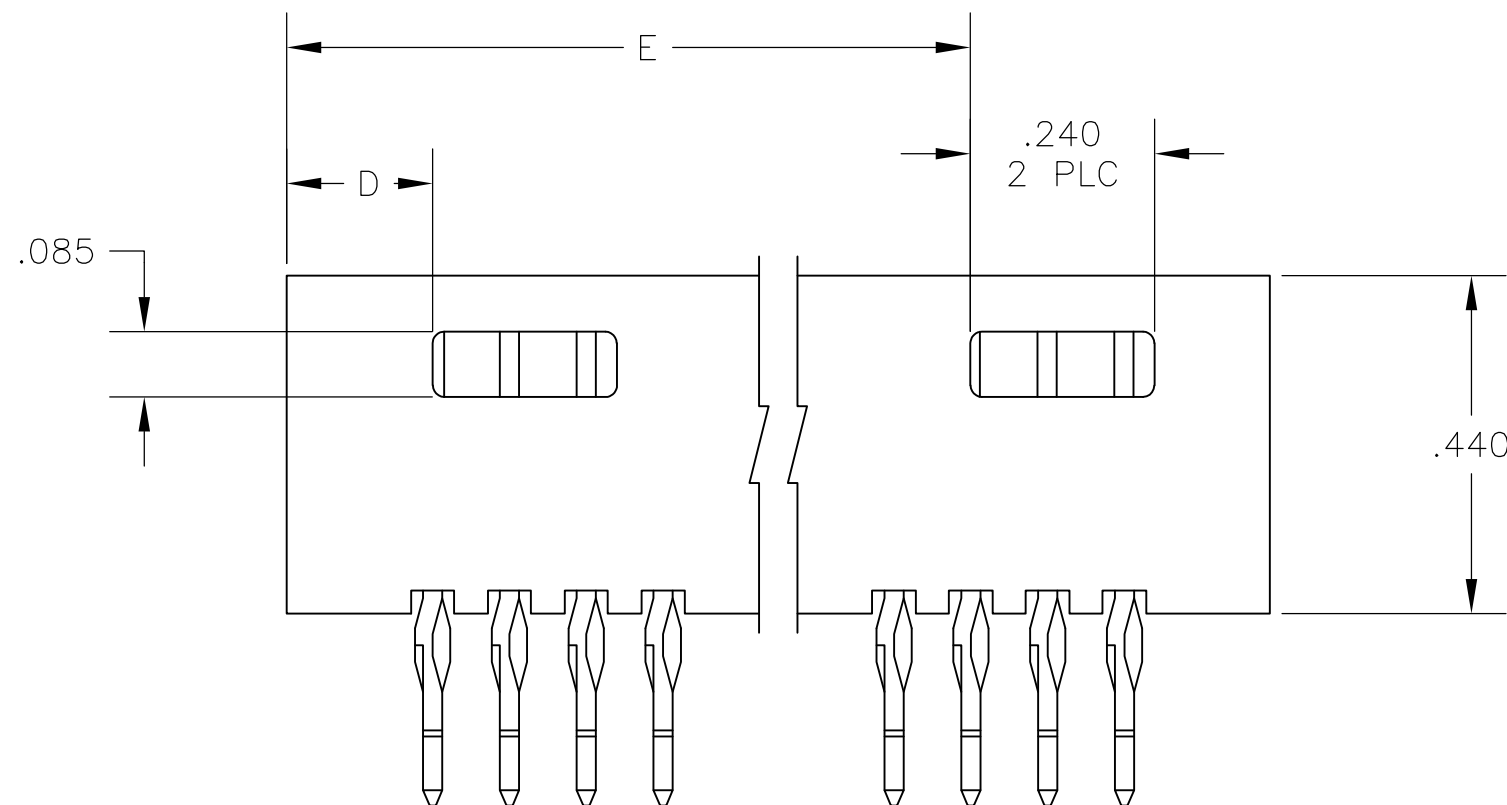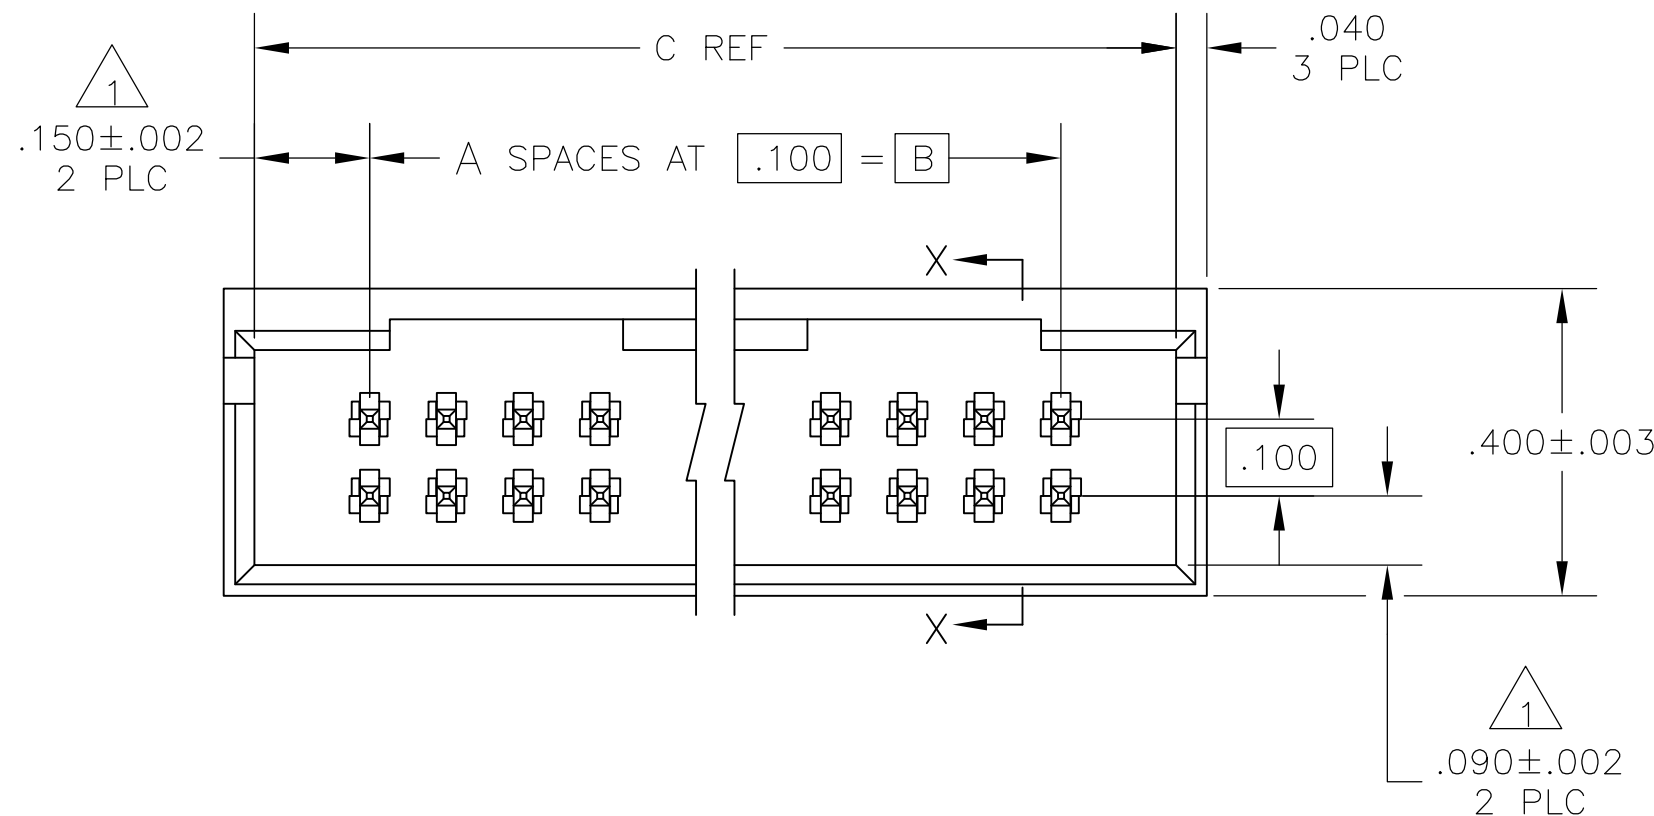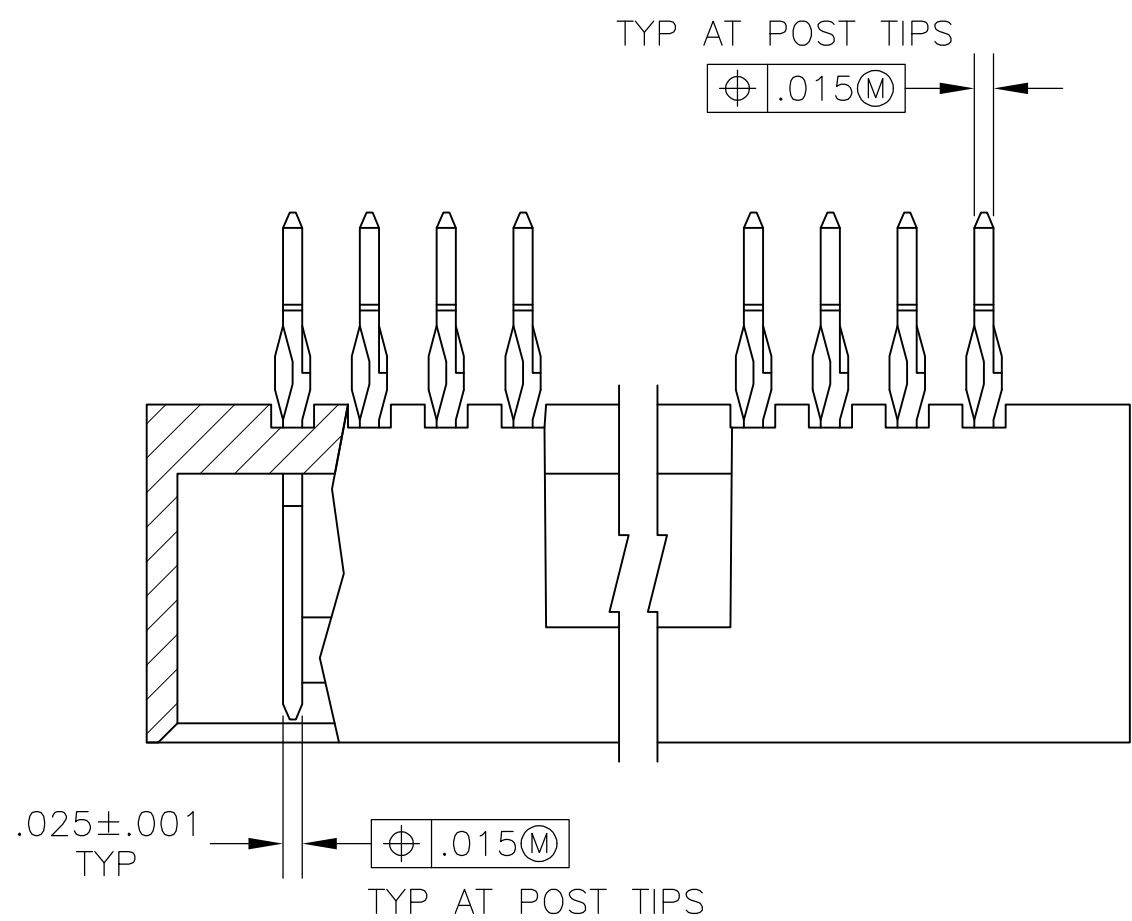

SECTION X-X

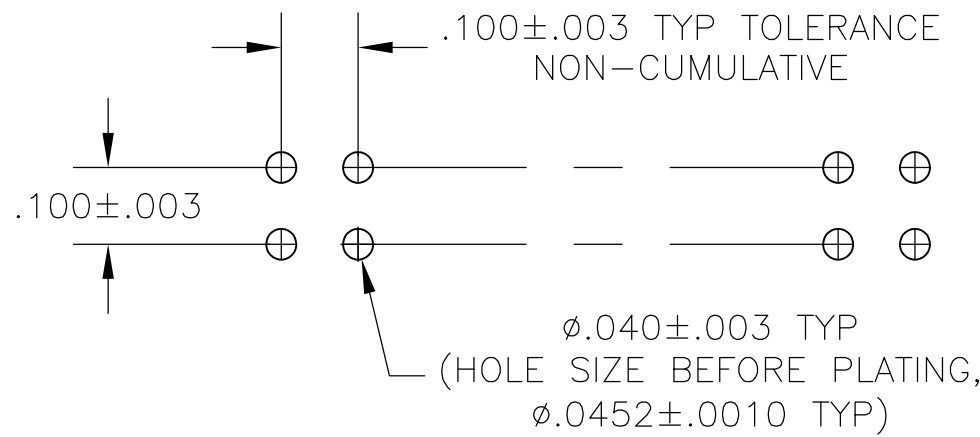

RECOMMENDED HOLE LAYOUT

- $\triangle 1$ THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- $\triangle 2$ POINT OF MEASUREMENT FOR PLATING THICKNESS
- $\triangle 3$.000030 GOLD IN CONTACT AREA, .000100-.000200 MATTE TIN-LEAD ON THE SOLDER TAIL, ALL OVER .000050 NICKEL
- $\triangle 4$.000030 GOLD IN CONTACT AREA, .000100-.000200 MATTE TIN ON THE SOLDER TAIL, ALL OVER .000050 NICKEL
- $\triangle 5$ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

$\triangle 5$ OBSOLETE	$\triangle 4$	$\triangle 4$	2.890	.190	3.200	2.900	29	60	-7-103337-8
	$\triangle 4$	$\triangle 4$	1.890	.190	2.200	1.900	19	40	-6-103337-8
	$\triangle 4$	$\triangle 4$	1.590	.190	1.900	1.600	16	34	6-103337-5
	$\triangle 4$	$\triangle 4$	1.190	.190	1.500	1.200	12	26	6-103337-1
$\triangle 5$ OBSOLETE	$\triangle 3$	$\triangle 3$	—	.390	1.000	.700	7	16	5-103337-6
	$\triangle 3$	$\triangle 3$	2.890	.190	3.200	2.900	29	60	-2-103337-8
	$\triangle 3$	$\triangle 3$	2.790	.190	3.100	2.800	28	58	2-103337-7
	$\triangle 3$	$\triangle 3$	2.690	.190	3.000	2.700	27	56	2-103337-6
	$\triangle 3$	$\triangle 3$	2.590	.190	2.900	2.600	26	54	2-103337-5
	$\triangle 3$	$\triangle 3$	2.490	.190	2.800	2.500	25	52	2-103337-4
	$\triangle 3$	$\triangle 3$	2.390	.190	2.700	2.400	24	50	2-103337-3
	$\triangle 3$	$\triangle 3$	2.290	.190	2.600	2.300	23	48	2-103337-2
	$\triangle 3$	$\triangle 3$	2.190	.190	2.500	2.200	22	46	2-103337-1
	$\triangle 3$	$\triangle 3$	2.090	.190	2.400	2.100	21	44	2-103337-0
	$\triangle 3$	$\triangle 3$	1.990	.190	2.300	2.000	20	42	1-103337-9
	$\triangle 3$	$\triangle 3$	1.890	.190	2.200	1.900	19	40	1-103337-8
	$\triangle 3$	$\triangle 3$	1.790	.190	2.100	1.800	18	38	1-103337-7
	$\triangle 3$	$\triangle 3$	1.690	.190	2.000	1.700	17	36	1-103337-6
	$\triangle 3$	$\triangle 3$	1.590	.190	1.900	1.600	16	34	1-103337-5
OBSOLETE	$\triangle 3$	$\triangle 3$	1.490	.190	1.800	1.500	15	32	1-103337-4
	$\triangle 3$	$\triangle 3$	1.390	.190	1.700	1.400	14	30	1-103337-3
	$\triangle 3$	$\triangle 3$	1.290	.190	1.600	1.300	13	28	1-103337-2
	$\triangle 3$	$\triangle 3$	1.190	.190	1.500	1.200	12	26	1-103337-1
	$\triangle 3$	$\triangle 3$	1.090	.190	1.400	1.100	11	24	1-103337-0
	$\triangle 3$	$\triangle 3$	.990	.190	1.300	1.000	10	22	103337-9
	$\triangle 3$	$\triangle 3$	.890	.190	1.200	.900	9	20	103337-8
	$\triangle 3$	$\triangle 3$	—	.490	1.100	.800	8	18	103337-7
	$\triangle 3$	$\triangle 3$	—	.390	1.000	.700	7	16	103337-6
	$\triangle 3$	$\triangle 3$	—	.390	.900	.600	6	14	103337-5
OBSOLETE	$\triangle 3$	$\triangle 3$	—	.290	.800	.500	5	12	103337-4
	$\triangle 3$	$\triangle 3$	—	.290	.700	.400	4	10	103337-3
	$\triangle 3$	$\triangle 3$	—	.190	.600	.300	3	8	103337-2
	$\triangle 3$	$\triangle 3$	—	.190	.500	.200	2	6	103337-1
	$\triangle 3$	$\triangle 3$	—	.190	.500	.200	2	6	103337-1
	$\triangle 3$	$\triangle 3$	—	.190	.500	.200	2	6	103337-1

PLATING	E	D	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER
---------	---	---	---	---	---	------------	----------------------

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN H. MOLL 01SEP87	Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS: INCHES		CHK T. CLARK 03SEP87	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD T. CLARK 03SEP87	PRODUCT SPEC	
APPLICATION SPEC		SIZE CAGE CODE DRAWING NO		
MATERIAL: HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR-BLACK POSTS: Cu-Ni-Sn		WEIGHT		RESTRICTED TO
FINISH: SEE TABLE		A1 00779		103337
CUSTOMER DRAWING		SCALE 4:1		SHEET 1 OF 1 REV K2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-103337-6](#)