


LOC		DIST		REVISIONS				
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD	
			P	REVISED PER ECO-11-004820	21MAR11	RK	HMR	

1. ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
2. TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
3. THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
4. HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
5. FINISH: 0.000381 [0.000015] GOLD ON CONTACT AREA,
OVER 0.00127 [0.000050] NICKEL, ENTIRE POST.

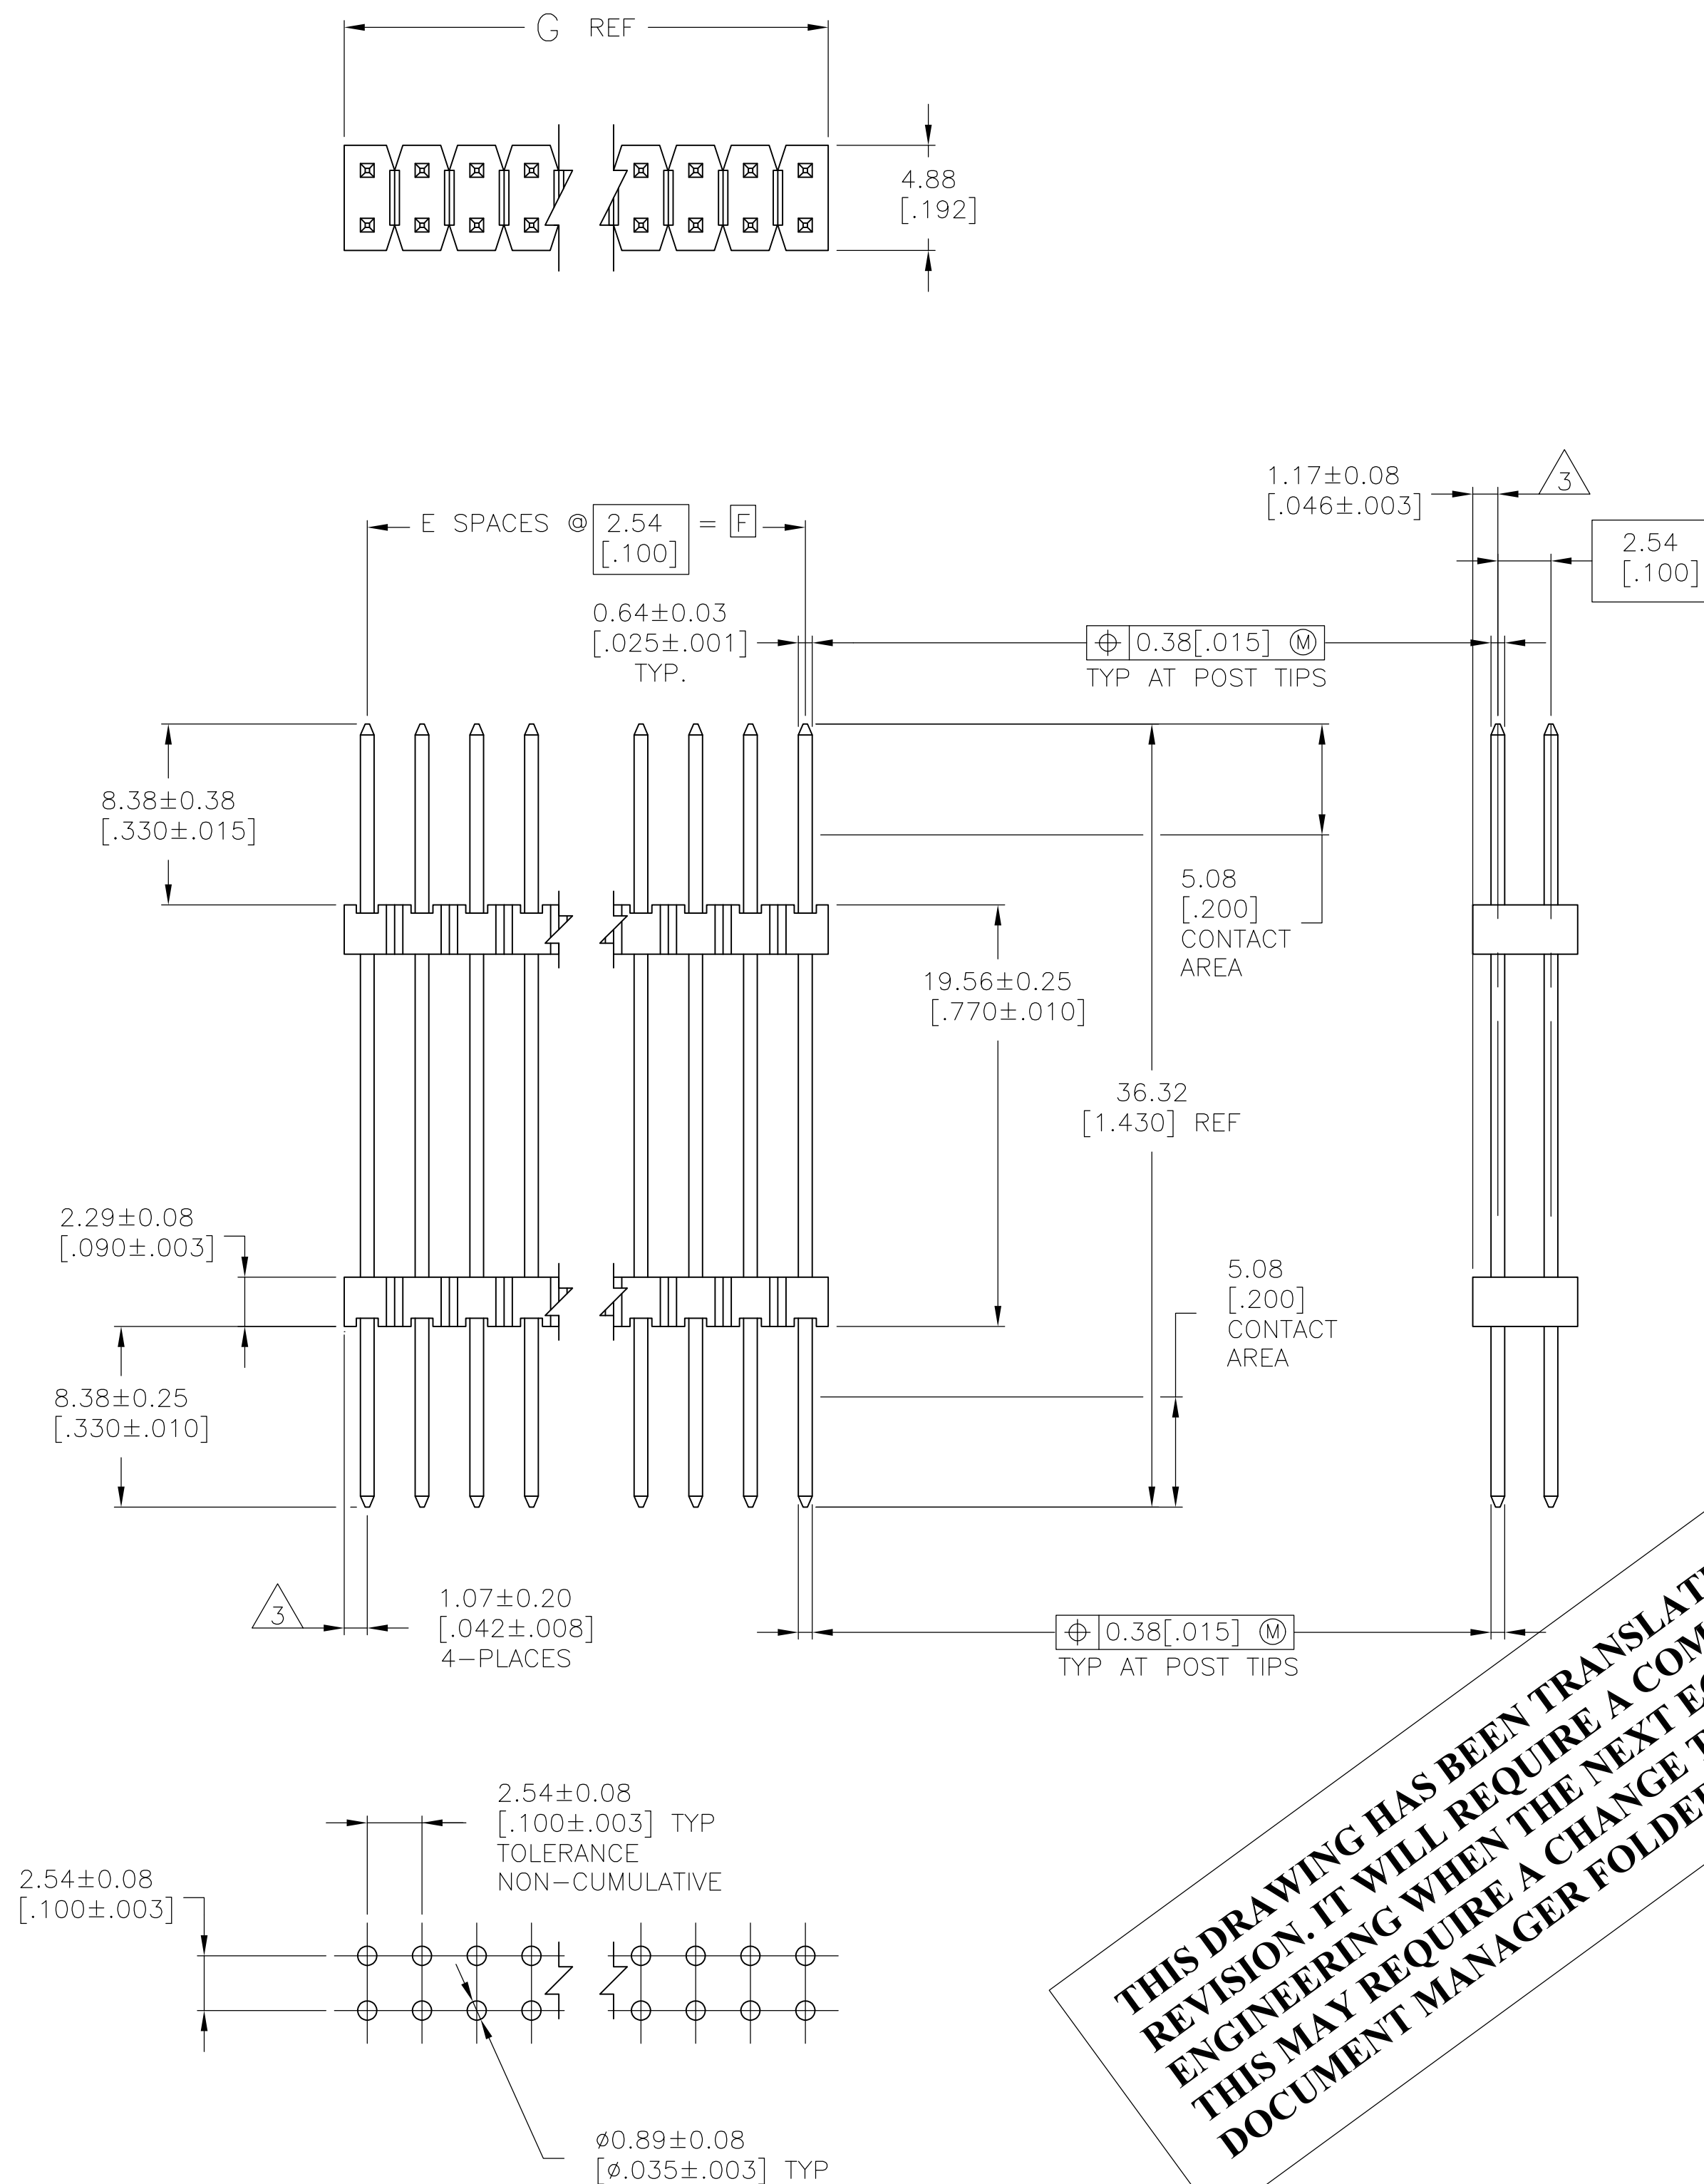

RECOMMENDED HOLE LAYOUT

101.19 [3.984]	99.06 [3.900]	39	80	4-146510-0
98.65 [3.884]	96.52 [3.800]	38	78	3-146510-9
96.11 [3.784]	93.98 [3.700]	37	76	3-146510-8
93.57 [3.684]	91.44 [3.600]	36	74	3-146510-7
91.03 [3.584]	88.90 [3.500]	35	72	3-146510-6
88.49 [3.484]	86.36 [3.400]	34	70	3-146510-5
85.95 [3.384]	83.82 [3.300]	33	68	3-146510-4
83.41 [3.284]	81.28 [3.200]	32	66	3-146510-3
80.87 [3.184]	78.74 [3.100]	31	64	3-146510-2
78.33 [3.084]	76.20 [3.000]	30	62	3-146510-1
75.79 [2.984]	73.66 [2.900]	29	60	3-146510-0
73.25 [2.884]	71.12 [2.800]	28	58	2-146510-9
70.71 [2.784]	68.58 [2.700]	27	56	2-146510-8
68.17 [2.684]	66.04 [2.600]	26	54	2-146510-7
65.63 [2.584]	63.50 [2.500]	25	52	2-146510-6
63.09 [2.484]	60.96 [2.400]	24	50	2-146510-5
60.55 [2.384]	58.42 [2.300]	23	48	2-146510-4
58.01 [2.284]	55.88 [2.200]	22	46	2-146510-3
55.47 [2.184]	53.34 [2.100]	21	44	2-146510-2
52.93 [2.084]	50.80 [2.000]	20	42	2-146510-1
50.39 [1.984]	48.26 [1.900]	19	40	2-146510-0
47.85 [1.884]	45.72 [1.800]	18	38	1-146510-9
45.31 [1.784]	43.18 [1.700]	17	36	1-146510-8
42.77 [1.684]	40.64 [1.600]	16	34	1-146510-7
40.23 [1.584]	38.10 [1.500]	15	32	1-146510-6
37.69 [1.484]	35.56 [1.400]	14	30	1-146510-5
35.15 [1.384]	33.02 [1.300]	13	28	1-146510-4
32.61 [1.284]	30.48 [1.200]	12	26	1-146510-3
30.07 [1.184]	27.94 [1.100]	11	24	1-146510-2
27.53 [1.084]	25.40 [1.000]	10	22	1-146510-1
24.99 [.984]	22.86 [.900]	9	20	1-146510-0
22.45 [.884]	20.32 [.800]	8	18	146510-9
19.91 [.784]	17.78 [.700]	7	16	146510-8
17.37 [.684]	15.24 [.600]	6	14	146510-7
14.83 [.584]	12.70 [.500]	5	12	146510-6
12.29 [.484]	10.16 [.400]	4	10	146510-5
9.75 [.384]	7.62 [.300]	3	8	146510-4
7.21 [.284]	5.08 [.200]	2	6	146510-3
4.67 [.184]	2.54 [.100]	1	4	146510-2
2.13 [.084]	—	—	2	146510-1
G	F	E	NO. OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN E. BRANDBERG 12NOV96		TE Connectivity	
DIMS: mm [INCHS]		DIN G. DUBNICZKI 12NOV96		NAME	
		TOLERANCES, UNLESS OTHERWISE SPECIFIED: PRODUCT SPEC APPLICATION SPEC		HEADER ASSEMBLY, MOD II, STACKING, DOUBLE ROW, .025 SQ.POST, UNSHROUDED	
MATERIAL		WEIGHT		SIZE CAGE CODE DRAWING NO. RESTRICTED TO A1 00779 C 146510	
				SCALE 4:1 SHEET 1 of 1 REV P	
CUSTOMER DRAWING					

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-146510-9](#)