
| Material | High Conductivity Seamless Copper Tube | |
|--|--|------------------------|
| Plating | Electro-Tin | |
| Wire Size | 2/0 AWG | 31 R Ref |
| Wire Type | Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric | |
| Wire Strip Length | 1-1/16 in. | .58±.04 |
| Stud Size | #10 | |
| UL Listed Wire Connector | Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts. | .23±.0420±.02 DIA |
| UL Temperature Rating | 90°C | |
| C.S.A Certified Wire Connector | Yes | 98±.04 |
| Panduit Color Code on Barrel | BLACK | Wire inspection window |
| Panduit Die Index No. on Barrel | P45 | |
| Alternate Industry Die Index No. () on Barrel | (13) | |

CERTIFIED

LISTED Wire Connector

BL

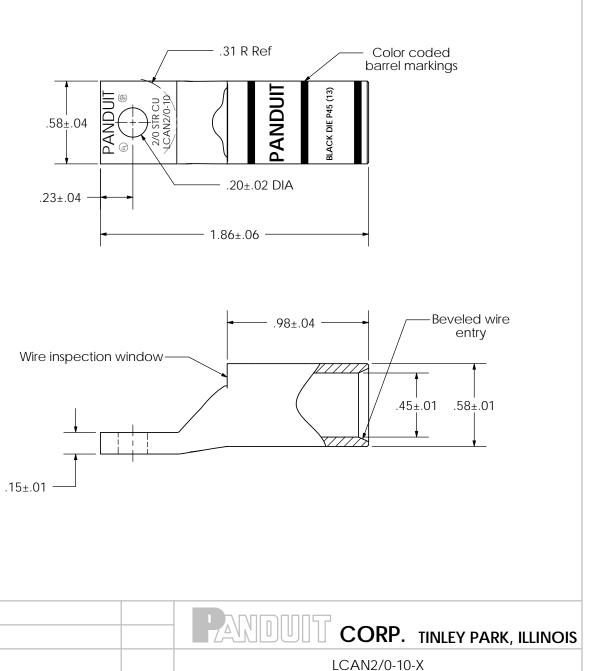

| 01 | 1/11 | JHNU | JHNU | IHNU REVISED OVERALL LENGTH: WAS 1.84 REVISED TONGUE THICKNESS: WAS .13 | | Copper Lug - One-Hole, Narrow Tongue, Standard Barrel | | |
|-----|------|------|------|--|-----|---|---------------------------------------|--|
| REV | DATE | BY | СНК | DESCRIPTION | ECN | SCALE N/A | DRAWING NO / CAD FILE LCAN2_0-10-CUST | |

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit: LCAN2/0-10-X