

# SMD Power Inductor CDRH8D38



Halogen Free



## Description

- Ferrite drum core construction.
- Magnetically shielded.
- L × W × H: 8.3 × 8.3 × 4.0 mm Max.
- Product weight: 0.9 g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.
- Halogen Free available.

## Environmental Data

- Operating temperature range: -40°C ~ +100°C (including coil's self temperature rise)
- Storage temperature range: -40°C ~ +100°C
- Solder reflow temperature: 260 °C peak.


## Packaging

- Carrier tape and reel packaging
- 13.0" diameter reel
- 1000pcs per reel



## Applications

- Ideally used in PDA ,HDD,DSC/DVC, etc as DC-DC converter inductors.


## Dimension - [mm]

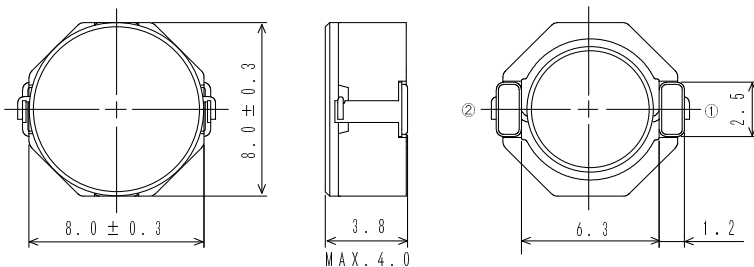

## Land pattern and Schematics - [mm]

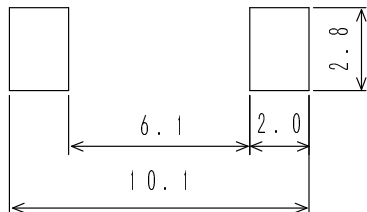

(1.8 μH ~ 10 μH)



(15 μH ~ 100 μH)

# SMD Power Inductor CDRH8D38



## Electrical Characteristics

Part Name	Stamp	Inductance ( $\mu$ H) [within] ※1	D.C.R. (m $\Omega$ ) Max. (Typ.) (at 20°C)	Saturation Current (A) ※2		Temperature Rise Current (A) ※3
				(at20°C)	(at105°C)	
CDRH8D38NP-1R8NC	1R8	1.8 $\mu$ H $\pm$ 30%	15.6(12.5)	7.00	6.20	6.80
CDRH8D38NP-2R5NC	2R5	2.5 $\mu$ H $\pm$ 30%	17.5(14)	6.50	5.50	6.00
CDRH8D38NP-3R5NC	3R5	3.5 $\mu$ H $\pm$ 30%	24(19)	5.00	4.40	5.20
CDRH8D38NP-4R7NC	4R7	4.7 $\mu$ H $\pm$ 30%	29(23)	4.60	4.00	4.40
CDRH8D38NP-6R0NC	6R0	6.0 $\mu$ H $\pm$ 30%	32(25)	4.20	3.50	4.00
CDRH8D38NP-100NC	100	10 $\mu$ H $\pm$ 30%	48(38)	3.00	2.60	3.20
CDRH8D38NP-150NC	150	15 $\mu$ H $\pm$ 30%	67(53)	2.75	2.30	2.50
CDRH8D38NP-220NC	220	22 $\mu$ H $\pm$ 30%	105(84)	2.30	1.88	2.00
CDRH8D38NP-330NC	330	33 $\mu$ H $\pm$ 30%	157(125)	1.75	1.52	1.60
CDRH8D38NP-470NC	470	47 $\mu$ H $\pm$ 30%	189(151)	1.52	1.28	1.42
CDRH8D38NP-680NC	680	68 $\mu$ H $\pm$ 30%	290(232)	1.30	1.10	1.08
CDRH8D38NP-101NC	101	100 $\mu$ H $\pm$ 30%	410(328)	1.05	0.88	0.88

※1. Inductance measuring condition: at 100kHz.

※2. Saturation current: The value of D.C. current when the inductance decreases to 65% of its nominal value.


※3. Temperature rise current: The value of D.C. current when the temperature rise is  $\Delta t=40^{\circ}\text{C}$  ( $T_a=20^{\circ}\text{C}$ ).

# SMD Power Inductor CDRH8D38



## Saturation Current & Temperature Rise Graph



— L (20°C) — L (100°C) —  $\Delta T$

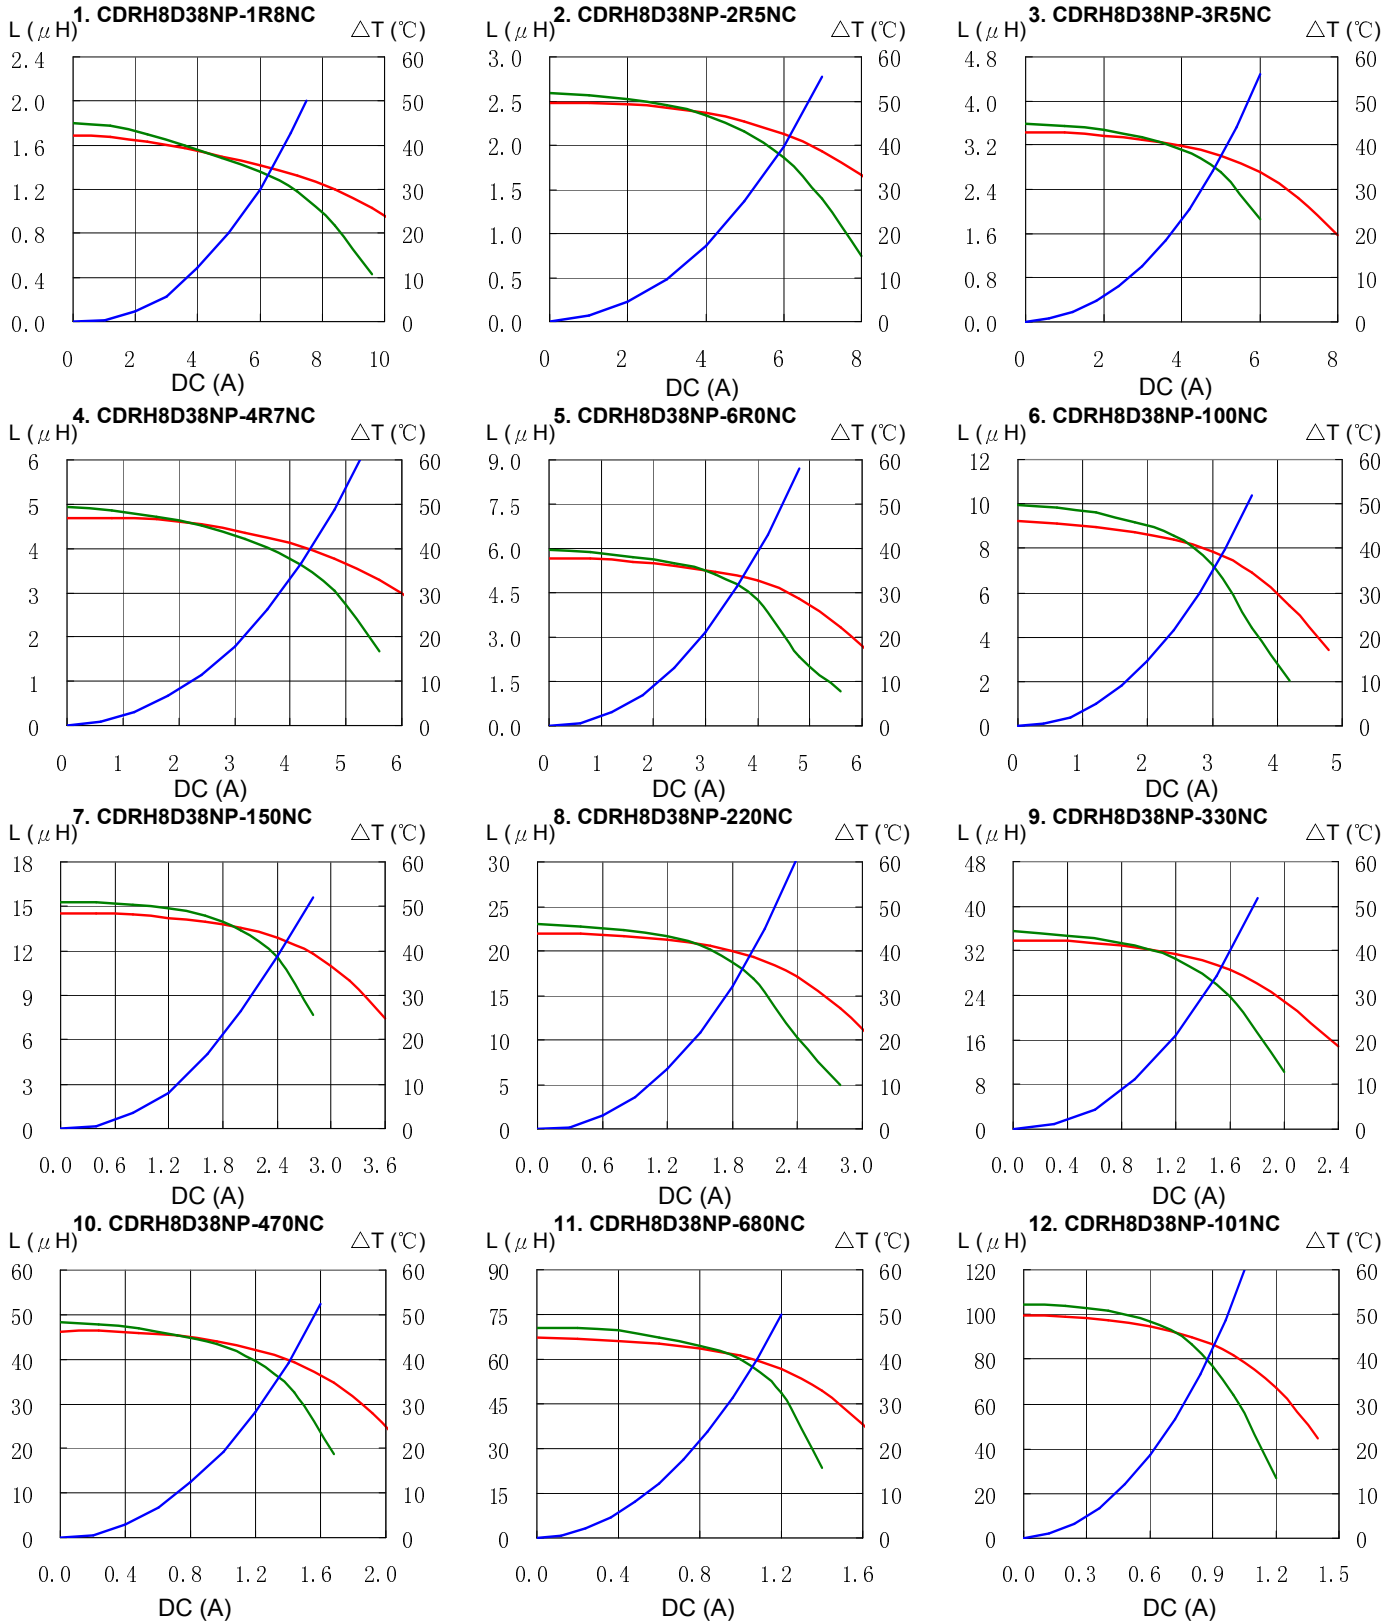

# SMD Power Inductor CDRH8D38



## Solder Reflow Condition

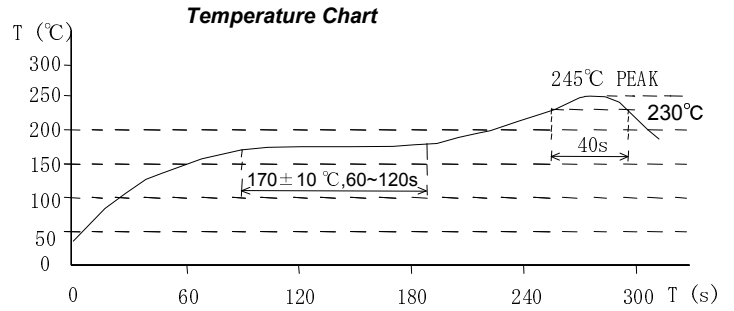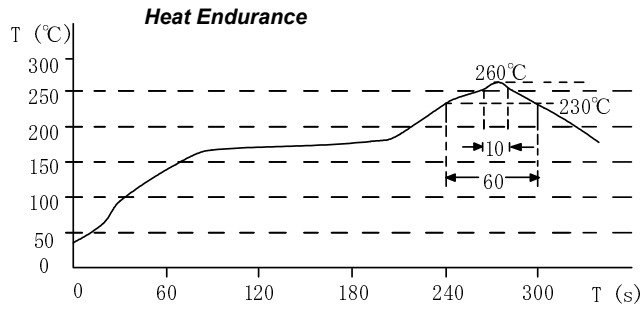

Please refer to the sales offices on our website - <http://www.sumida.com>

### Hong Kong

Tel.+852-2880-6781  
FAX.+852-2565-9600  
[sales@hk.sumida.com](mailto:sales@hk.sumida.com)

### Saitama(Japan)

Tel.+81-48-691-7300  
FAX.+81-48-691-7340  
[sales@jp.sumida.com](mailto:sales@jp.sumida.com)

### Chicago

Tel.+1-847-545-6700  
FAX. +1-847-545-6720  
[sales@us.sumida.com](mailto:sales@us.sumida.com)

### Shanghai

Tel.+86-21-5836-3299  
FAX.+86-21-5836-3266  
[shanghai.sales@cn.sumida.com](mailto:shanghai.sales@cn.sumida.com)

### Seoul

Tel.+82-2-6237-0777  
FAX.+82-2-6237-0778  
[sales@kr.sumida.com](mailto:sales@kr.sumida.com)

### Oberzell

Tel.+49-8591-937-0  
FAX. +49-8591-937-103  
[contact@eu.sumida.com](mailto:contact@eu.sumida.com)

### Shenzhen

Tel.+86-755-8291-0228  
FAX.+86-755-8291-0338  
[shenzhen.sales@cn.sumida.com](mailto:shenzhen.sales@cn.sumida.com)

### Singapore

Tel.+65-6296-3388  
FAX.+65-6841-4426  
[sales@sg.sumida.com](mailto:sales@sg.sumida.com)

### Neumarkt

Tel.+49-9181-4509-110  
FAX. +49-9181-4509-310  
[infocomp@eu.sumida.com](mailto:infocomp@eu.sumida.com)

### Taipei

Tel.+886-2-8751-2737  
FAX.+886-2-8751-2738  
[sales@tw.sumida.com](mailto:sales@tw.sumida.com)

### San Jose

Tel.+1-408-321-9660  
FAX.+1-408-321-9308  
[sales@us.sumida.com](mailto:sales@us.sumida.com)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Sumida:

[CDRH8D38/ANP-100MC](#) [CDRH8D38/ANP-150MC](#) [CDRH8D38/ANP-220MC](#) [CDRH8D38/ANP-470MC](#)  
[CDRH8D38/ANP-120MC](#) [CDRH8D38/ANP-820MC](#) [CDRH8D38/ANP-390MC](#) [CDRH8D38/ANP-121MC](#)  
[CDRH8D38/ANP-680MC](#) [CDRH8D38/ANP-180MC](#) [CDRH8D38/ANP-330MC](#) [CDRH8D38/ANP-560MC](#)  
[CDRH8D38/ANP-101MC](#) [CDRH8D38/ANP-270MC](#)